


## Ceiling Mount Ventilating Fan



# Standard Series


### ■ FV-24CU8 ■ FV-24CD8 ■ FV-24CH8

- HP (half pitch) motor with ball bearing
- Taper blade sirocco fan
- Curve-shaped backdraft shutter
- Super low noise level

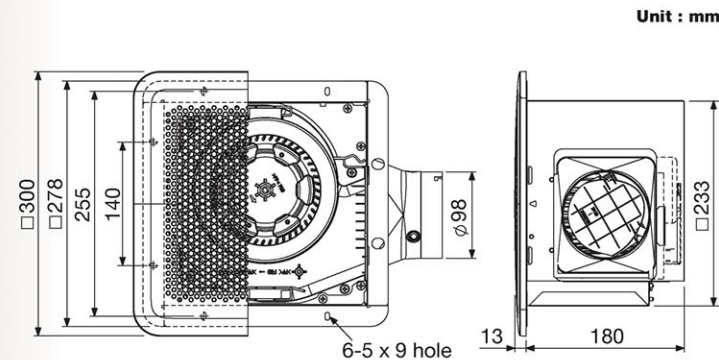

### ■ FV-17CU8

- HP (half pitch) motor with ball bearing
- Taper blade sirocco fan
- Curve-shaped backdraft shutter
- Super low noise level

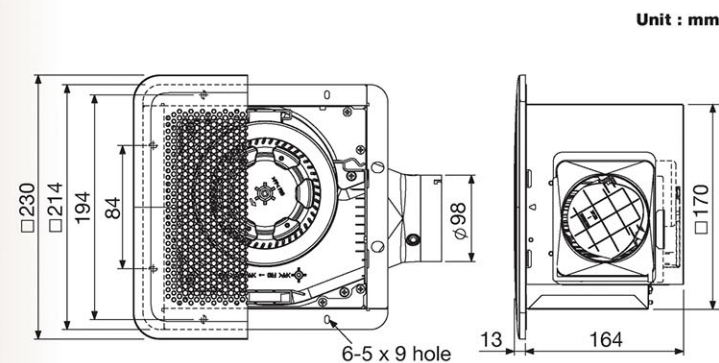

## Specification

Model No.	Voltage		Air Volume		Consumption	Noise	Weight	Installation Space	Duct Size
	[V]	[Hz]	[m³/h]	[CFM]	[W]	[dB (A)]			
FV-24CU8	220	50	140	82	10.5	25	2.7	240 x 240	ø 100
		60	150	88	13.5	26.5			
	230	150	88	12	27				
FV-24CD8	220	50	170	100	13.5	28.5	2.7	240 x 240	ø 100
		60	180	106	15	30			
	230	180	106	16.5	31.5				
FV-24CH8	220	50	200	118	16.5	32	2.7	240 x 240	ø 100
		60	210	124	18	34			
	230	200	118	22.5	34				
FV-17CU8	220	50	85	50	7.5	23	1.7	177 x 177	ø 100
		60	85	50	8.5	24.5			
	230	85	50	10	24				
	240	50	90	53	9.5	26			

#### Note :

- The value of power consumption, air volume and noise are specified at the static pressure of 0 Pa
- The value of air volume is the mean value measured by our company.
- The values of noise level is the average of three values measured at 1m apart from left, right and directly beneath the product.
- The values of noise level is the mean of A weighted average sound pressure level measured by our company.

Panasonic



Living in  
**Fresh**  
Environment

Standard Series

**Ceiling Mount Ventilating Fan**

**Panasonic**

Panasonic Ecology Systems Co., Ltd.  
<http://www.plshk.panasonic.hk>

• Actual colors may vary slightly from those shown.  
• Specifications are subject to change without prior notice.

CATALOG NO: P-CM003  
PRINTED IN HONG KONG (08-19)

# Feature

Achieve reduction of power consumption and noise by the optimized product structure



## Long Life

- The unique design of HP(Half Pitch) motor, incorporates with well lubricated ball bearings, temperature rise is reduced that prolongs motor lifetime and product durability
- Frame assembly made of ZAM alloy coated steel enhances rust protection
- Louver adopts PP material that is comparatively higher chemical resistant and weatherability than ABS material of previous model



## Highly Efficient

- Taper blade design effectively controls the turbulence surrounding the blade. Strong and smooth ventilation performance is achieved while noise level is reduced, by whole of the blade
- Curve-shaped backdraft shutter results in further improvement of air tightness and strength



## Super Low Noise

- The integrated casing and orifice minimizes the transmission of noise from the fan and motor to exterior. This technology further reduces the operation noise to incredibly low level by "Resonance-Noise-Absorption" operation, which creates a tranquility and silent environment for your life







## Easy Installation





- Cassette type discharge adaptor facilitating installation of the product, as well as duct connecting work
- Spring-clip louver allows convenient installation and removal of louver

# Performance Data





## Standard Series : FV-24CU8

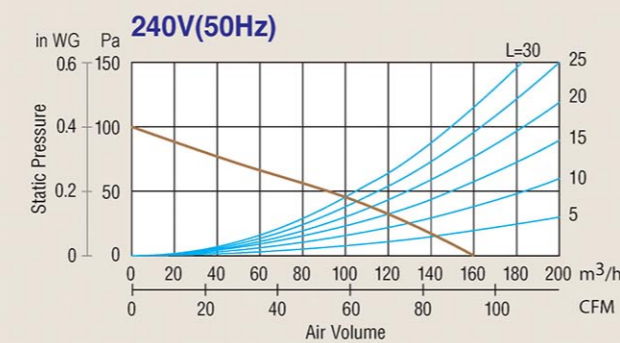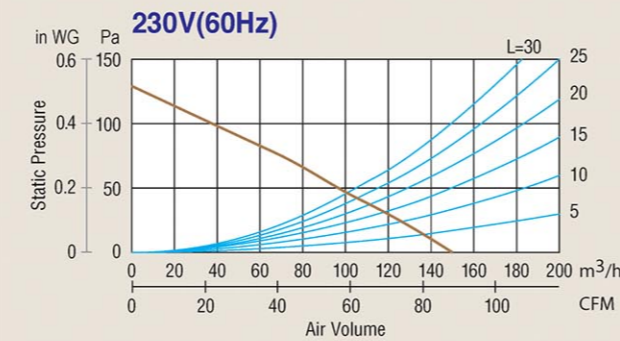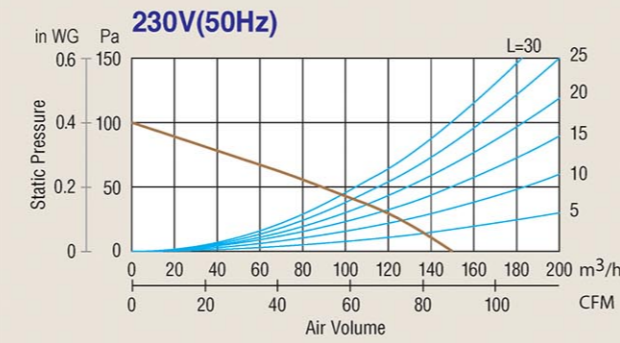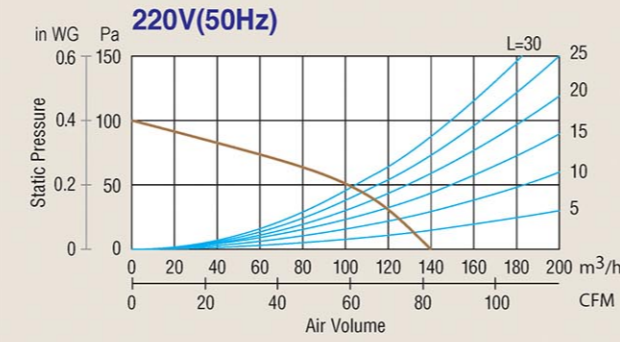

## Standard Series : FV-24CD8

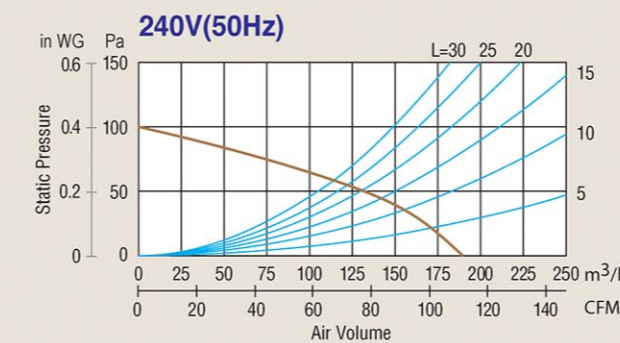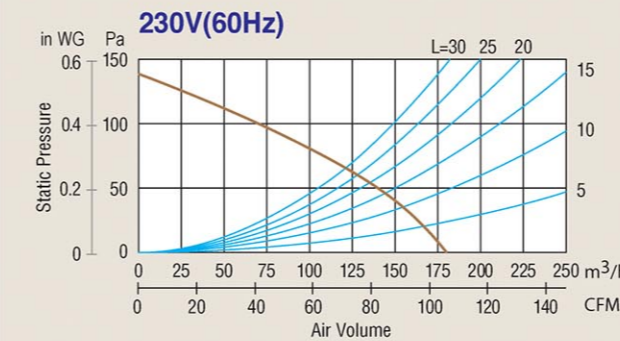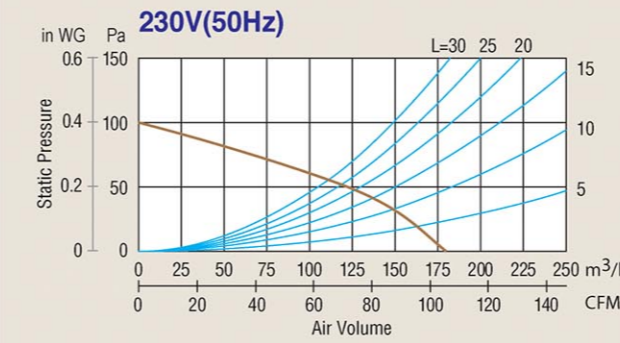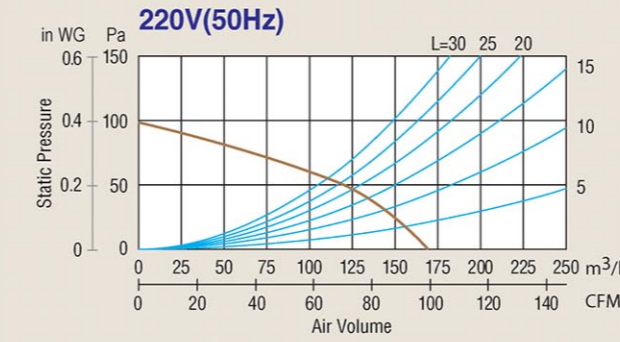

## Standard Series : FV-24CH8

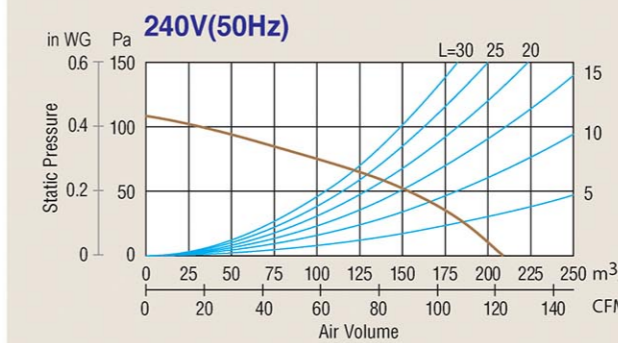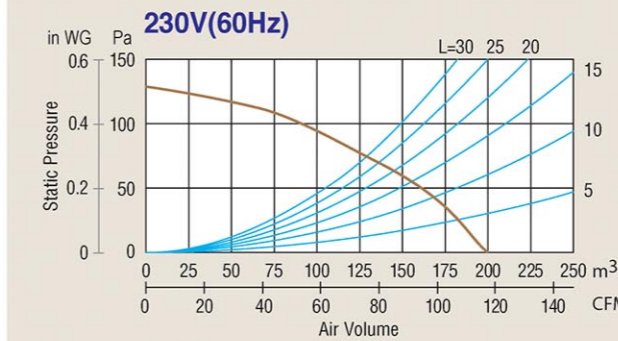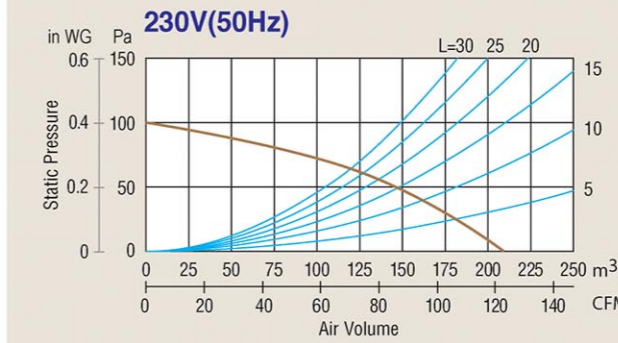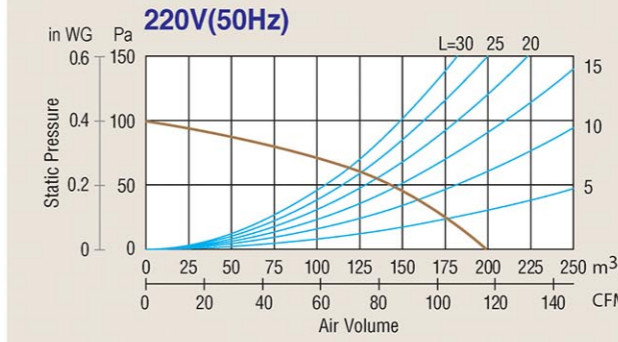

## Standard Series : FV-17CU8

