

Multi-Split Air Conditioning System

Panasonic's multi-split air conditioning systems are designed to provide more spaces saving installation for outdoor units. A neater alternative to preserve the exterior appearance of buildings such as condominiums, single and multi-storey residences.



INDEX

Features Highlight

- Air Purification **04**
- Air Efficiency **05**
- Airflow **06 - 07**
- Air Connectivity **08**
- Durability **09**
- Installation & Servicing **10 - 11**

Products Information

- Advantages of Multi-Split Air Conditioning System **12**
- R32 Cooling & Heating Multi-Split Air Conditioning System **13 - 17**
- R410A Cooling Only Multi-Split Air Conditioning System **18 - 22**
- Features Explanation & Features Comparison **23 - 25**
- Project Reference **26 - 27**
- Multi-Split Capacity Table **28 - 74**
- Indoor Dimension **75 - 79**

	Type	Features	Capacity							
			1.6kW	2.0kW	2.5kW	3.5kW	4.2kW	5.0kW	6.0kW	7.1kW
R32 COOLING & HEATING	Wall-Mounted	ANTI-BACTERIAL FILTER	CS-MRZ16WKH-8	CS-MRZ20WKH-8	CS-MRZ25WKH-8	CS-MRZ35WKH-8	CS-MRZ42WKH-8	CS-MRZ50WKH-8	CS-MRZ60WKH-8	CS-MRZ71WKH-8
	Slim Ducted				CS-MZ25WD3H8A	CS-MZ35WD3H8A		CS-MZ50WD3H8A	CS-MZ60WD3H8A	
	4-way Mini Cassette				CS-MZ25WB4H8A	CS-MZ35WB4H8A		CS-MZ50WB4H8A	CS-MZ60WB4H8A	

	Type	Features	Capacity							
					2.8kW	3.2kW	4.0kW	5.0kW	6.0kW	7.0kW
R410A COOLING ONLY	Wall-Mounted	ANTI-BACTERIAL FILTER			CS-MPS9SKH	CS-MPS12SKH	CS-MPS15SKH	CS-MPS18SKH	CS-MPS24SKH	CS-MPS28SKH
	Slim Ducted				CS-MS9SD3H	CS-MS12SD3H		CS-MS18SD3H	CS-MS24SD3H	

ANTI-BACTERIAL FILTER

Clean Air

The Anti-bacterial filter combines anti-bacterial, anti-virus, anti-allergen and anti-mould protection in one to provide clean air for your loved ones.




Effectiveness	Target Substance and Substance Name	Mechanism
<p>DEACTIVATES UP TO 99% of filter-captured Bacteria*¹</p>	<p>Anti-bacterial</p> <p>*¹ Bacteria deactivation was certified by Boken Quality Evaluation Institute. Test Report No : 10042459-1 and 10042459-2 Bacteria : Staphylococcus aureus NBRC 12732 : Escherichia coli NBRC 3972</p>	<p>Artificial Enzyme</p> <p>Cell-wall is covered by Artificial Enzyme</p> <p>Bacteria is caught by the filter. Artificial Enzyme will attach to surface of bacteria. Bacteria becomes inactive by preventing its growth.</p> <p>Remark: The above are not actual images of target substance structure. Image drawn is for illustration purpose.</p>
<p>DEACTIVATES UP TO 99% of filter-captured Viruses*²</p>	<p>Anti-virus</p> <p>*² Virus deactivation was certified by Osaka Prefectural Institute of Public Health. Test Report No : 313360397 Virus : Influenza (H3N2) A/Hong Kong</p>	<p>Disinfectant</p> <p>Spiques are covered by Disinfectant</p> <p>The virus is caught by the filter. Disinfectant will attach to surface protein of virus. Virus becomes inactive through 'tanning effect' making them harmless.</p> <p>Remark: The above are not actual images of target substance structure. Image drawn is for illustration purpose.</p>
<p>DEACTIVATES UP TO 99% of filter-captured Allergen*³</p>	<p>Anti-allergen</p> <p>*³ Allergen deactivation was certified by Shinshu University. Allergen : Cider Pollen Allergen Cry j1</p>	<p>Artificial Enzyme</p> <p>Allergen loses original properties or characteristic</p> <p>The allergen is caught by the filter. Artificial Enzyme will 'denature' the filter-captured allergen. 'Denatured' allergen will no longer keep its original property as allergen; therefore, it is harmless.</p> <p>When allergen is denatured, the strand of amino acid is "teased" apart hence changing the shape. In this way, allergen will lose its original properties or characteristic as allergen, thus making them harmless.</p> <p>Remark: The above are not actual images of target substance structure. Image drawn is for illustration purpose.</p>
<p>INHIBITS Mould*⁴ Growth</p>	<p>Anti-mould</p> <p>*⁴ Certified by Boken Quality Evaluation Institute. Test Report No : 000366-3 Mould : Aspergillus niger ATCC 6275</p>	<p>The mould will be caught by the filter. Fungicide will attach to surface protein of mould. 'Fungicide inhibits mould from growing by preventing the cell-wall composition.'</p>

*Applicable to CS-MRZ16/20/25/35/42/50/60/71WKH-8 and CS-MPS9/12/15/18/24/28SKH

INVERTER

Energy Saving and Precise Temperature Control

Panasonic's INVERTER reduces power consumption by varying the speed of the compressor according to the temperature changes with the aim of minimising the temperature fluctuations so you can enjoy consistent cooling comfort.

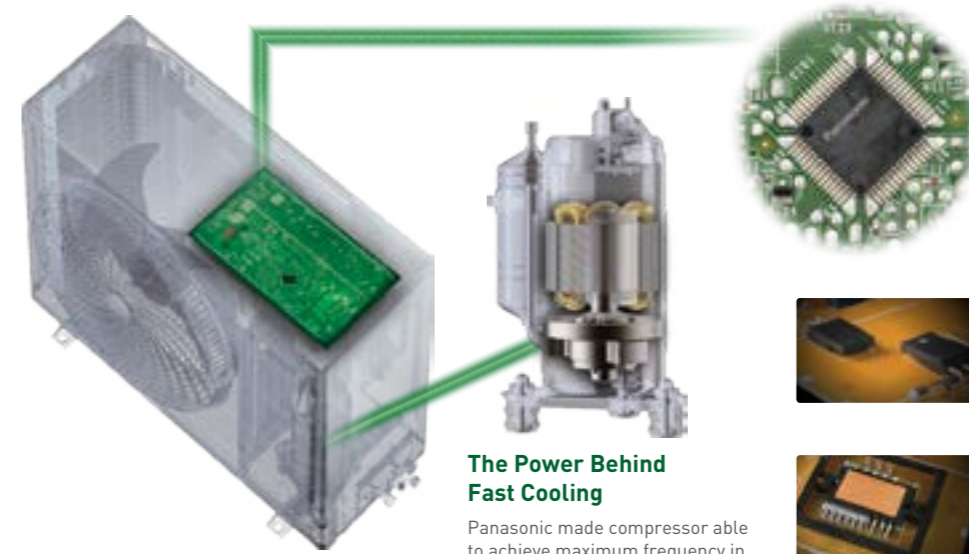

The "BRAIN" of the Inverter - The Micro Computer

Determines the most suitable operation mode as time passes and automatically adjusts power output for maximum comfort.

The Power Behind Fast Cooling

Panasonic made compressor able to achieve maximum frequency in the shortest time at start-up, giving you powerful cooling the moment the air conditioner is switched on.



PAM (Pulse Amplitude Modulation)

Increases compressor voltage rapidly to provide powerful cooling to reach the set temperature fast at start up.



PWM (Pulse Width Modulated Wave)

Stabilises the compressor rotation speed when maintaining the set temperature.



R32 REFRIGERANT

An Environmentally-friendly Refrigerant

HIGHER COOLING CAPACITY

REDUCE ENERGY COSTS

ECO FRIENDLY

R32 has higher cooling capacity thereby increases heat transfer efficiency.

It consumes less energy, helping you to save on electricity costs.

R32 has zero impact on the ozone layer, therefore it's environment friendly.


Refrigerant Properties of R32, R410A, and R22

	R32	R410A	R-22
Composition	Single Component	2 Components	Single Component
Chemical Formula	CH ₂ F ₂	CH ₂ F ₂ / CHF ₂ CF ₃	CHClF ₂
Boiling Point (°C)	-51.7	-51.5	-40.8
Ozone Depletion Potential (ODP)	0	0	0.055
Global Warming Potential (GWP)	675	2090	1810
Pressure	1.6 x	1.6 x	1x
Refrigerant Oil	Synthetic Oil (FW50S)	Synthetic Oil (FV50S)	Mineral Oil
Toxicity	None	None	None
Flammability	A2L Mildly flammable	A1 Non-flammable	A1 Non-flammable


*Applicable to R32 COOLING & HEATING MULTI-SPLIT AIR CONDITIONING SYSTEM only.

Comfort Cooling with Faster, Further Airflow

Panasonic's air solutions offer ideal airflow to keep your family comfortable.

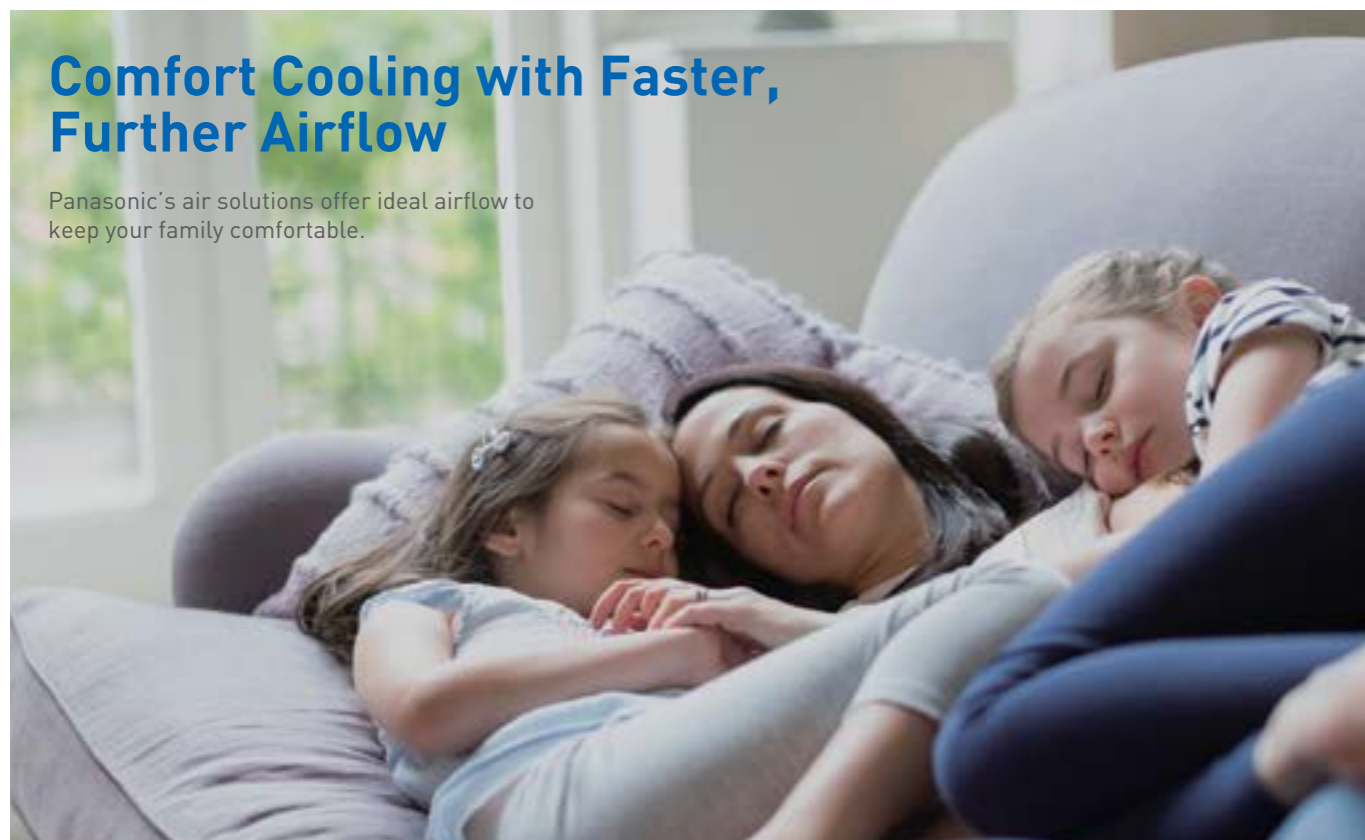


Types of Air Conditioners

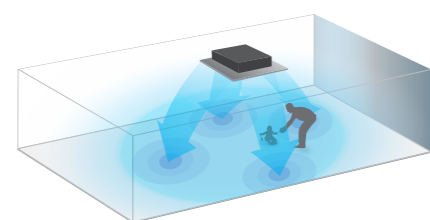


4-way Mini Cassette

Four-way airflow distributes cool air evenly

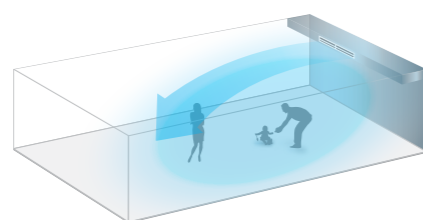

Slim Ducted


Directs cool air towards ceiling

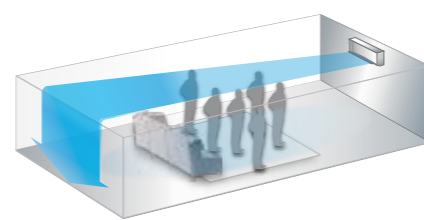

Wall-mounted


Cool air spread across the room for further air throw distance

4-way Mini Cassette

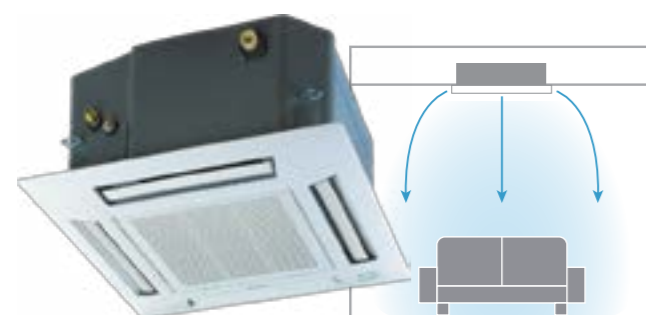


4-Way Directional Flap Creates Comfortable Wide- distance Airflow Distribution

Air from the center is sent farther and air blown out from the four sides flaps spreads throughout the room to provide all round cooling comfort.

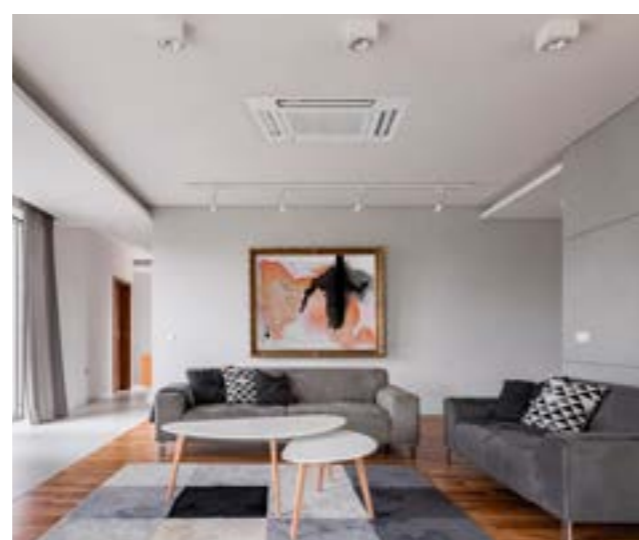

Slim Ducted

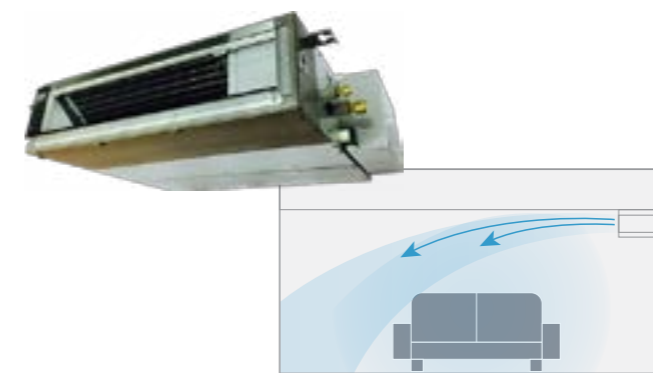

Cool Airflow Direct to the Ceiling

Slim ducted directs cool air towards the ceiling over a wide-angle range. Cool air gently making natural, refreshing comfort.



Wall Mounted



MRZ Series



MPS Series



Fast Cooling & Shower Cooling

As soon as the air conditioner is turned on, powerful direct airflows cool you immediately, perfect when you return home after a hot day.

The flap can be adjust upward to spread cool air evenly across the room to avoid direct cooling.



Fast Cooling^{*1}

The flap directs airflow downward to cool you rapidly



Shower Cooling^{*1}


The flap directs airflow upwards over a wider area then showers down gently and evenly across the room.

^{*1} Flap design may vary depends on models.

Enjoy Faster Cooling with Just a Push of a Button

POWERFUL Mode will run indoor fan at super high speed, so you get to enjoy powerful cooling.


POWERFUL Mode^{*2}



Press **POWERFUL/ECO** once to switch ON POWERFUL Mode

POWERFUL Cooling at Startup

POWERFUL Mode cools your room faster the moment you switch on your air conditioner.

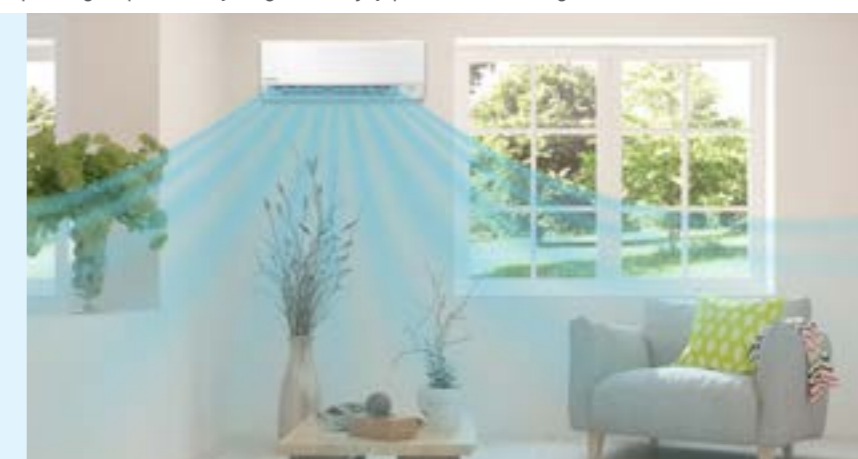

^{*2} Applicable to CS-MRZ16/20/25/35/42/50/60/71WKH-8 only.


Convenient Centralised Solutions

The **Panasonic Comfort Cloud Application** enables you to conveniently manage and monitor multiple air conditioning units for homes from just 1 mobile device.



SMART Control

Control Multiple AC Units in 1 Location

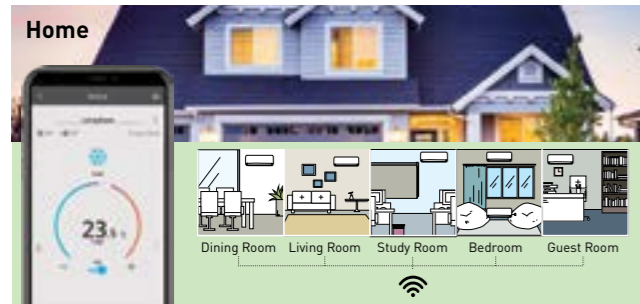


Control Multiple Units in Multiple Locations



SMART Comfort

Remotely Access All AC Features

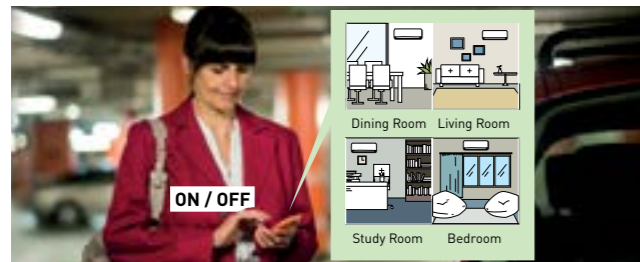


Pre-cool Spaces




SMART Efficiency

Analyse Energy Usage Patterns

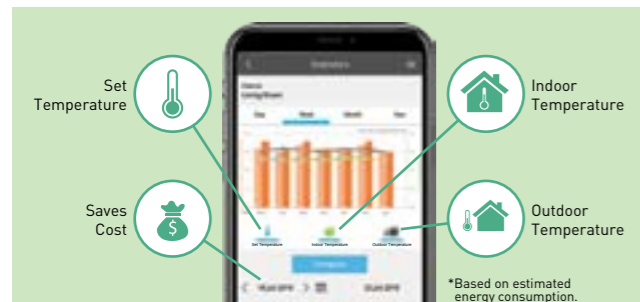


Compare Usage History for Better Budget Planning

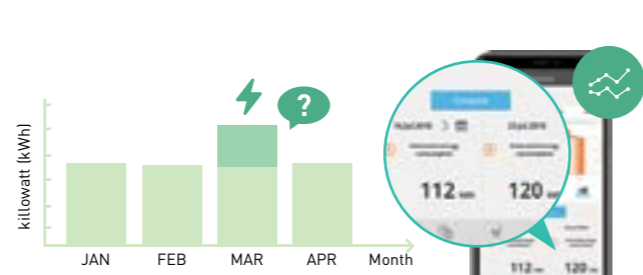

SMART Assist

Effortless Troubleshooting

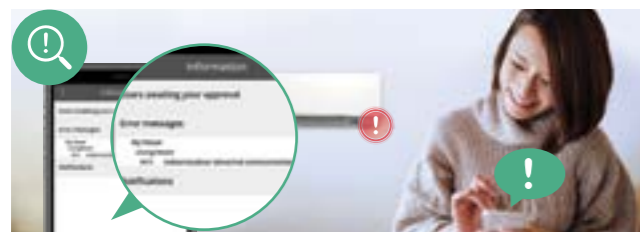

Assign Other Users While You Are Away



Compatible Device and Browsers
 1. iOS 9.0 or above
 2. Android™ 5.0 Lollipop or Later



Please note: This is not a definitive list of all compatible devices, other similar devices which use supported Operating Systems should also work either via dedicated Apps. Please note that user experience may vary slightly depending on hardware and software combination.

* Wireless LAN Remote Control for Internet Connection required optional network adaptor.
 * Indoor temperature display and some function are not available through the App for all models.

Highly Durable Outdoor Unit for Corrosion Resistance

Panasonic's outdoor unit provides high level durability for an extended time under a wide range of conditions to achieve excellent performance.

Wide Operating Temperature Range*
 Cooling : **-10°C ~ +46°C**
 Heating : **-15°C ~ +24°C**



Blue Fin Condenser



- Improves durability
- Protects condenser against corrosion from air, water and other corrosive
- Anti-rust

Copper Tube Condenser



- Better heat transfer
- Higher cooling capacity
- Easy to clean and maintain


Corrosion Resistant Outdoor Coating

- Outdoor unit layered with multiple type of protection coatings
- Withstand salty air and rain exposure
- Resist corrosion



Water Resistant PCB


- Contact sections on Printed Circuit Board (PCB) are resin-potted
- Prevent adverse effects by unlikely contact with droplets of water



* Applicable to R32 COOLING & HEATING MULTI-SPLIT AIR CONDITIONING SYSTEM only.


Flexible Installation Design

Panasonic's offers wide range of indoor and outdoor units to match your interior and exterior.

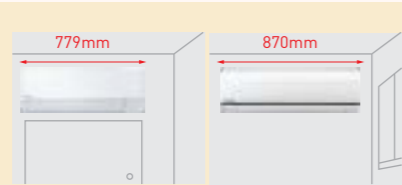

Compact design fit perfectly anywhere

The wall-mounted designed to be compact in size allow it easily fitted within any interior either above the door, close to ceiling or close to wall.

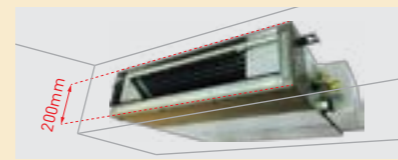

Slim and compact, this unit require less ceiling space

With 200mm height of slim ducted unit, it allows installation in very narrow ceiling space.



Flat Horizontal design, provide neat fit in the ceiling


The flat horizontal design of 4-way mini cassette allows it to protrude only 30mm from the ceiling to blend naturally into a variety of interior.




Built-in Drain Pump

Using a high-lift built-in drain pump, drain piping can be elevated up to 702mm (slim ducted) or 750mm (mini cassette) from the base of the unit.

Slim Ducted

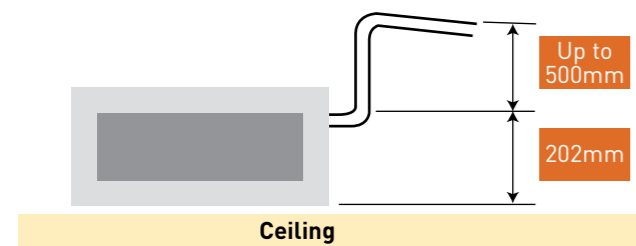


4-way Mini Cassette

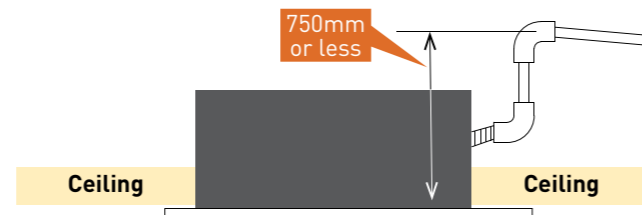

Long Piping Length Up to 80 meters

Flexible arrangement and installation of indoor and outdoor units based on the room condition, location and installation convenience of the site.

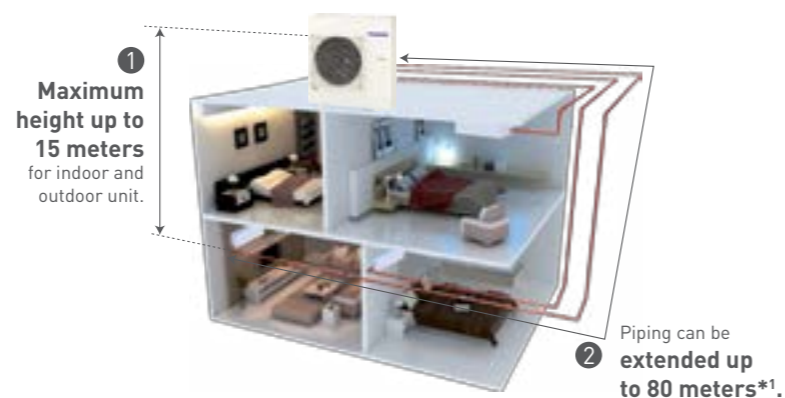

*1 Applicable to CU-5Z100WBH-8 only.

Easy Breezy Installation & Servicing

Panasonic air conditioners are designed to be compact in size, minimalist with matt finishing, enabling them to be easily fitted and seamlessly harmonize with any interior. Its uniquely designed structure enhances durability and yet conveniently eases installation and maintenance routines. The Good Design Award 2020 has recognised its achievement of balancing product design and function for the benefit of the global community*2.



Easy Removal

User-friendly slider locks



Easy to lock & unlock the front grille.

One-piece front grille



Makes installation & servicing easier when dismantling or assembling.

Simple steps for circuit board (PCB) removal



Remove control board cover.



Disconnect all the connectors.



Pull out main PCB, Screw-free design makes it easy to remove PCB.

Easy Access

Built-in support holders



Built-in support holder makes it easy to securely hold the indoor unit against the wall.

Piping storage



180mm bigger piping space improves work efficiency during installation and servicing.

Easy access to drain hose & piping



More open working spaces provides easy view and unobstructed access to setup drain hose and piping.

Easy wire insertion and connection



Single wire insert tunnel with wider opening provides front visibility and easy wire insertion and connection.

Neat Installation

Stronger installation plate



Stronger & more solid installation plate which provides more stability to better support indoor units.

Screw holders for uneven surfaces





Ensures indoor units fit well on the wall without any gaps.

*2 Applicable to CS-MRZ16/20/25/35/42/50WKH-8 only.

Connection of Outdoor and Indoor Units

	Models	Indoor Units: Possible Combination Patterns (Must be within capacity range)	Maximum Connectable Indoor Unit kW	Indoor unit combination			
				Capacity (kW class)	Wall-Mounted	Slim Ducted	Mini Cassette
Up to 2 rooms	CU-2Z52WBH-8  5.2kW Dimensions (H x W x D) : 619 x 824 (+70) x 299 mm / Weight : 39 kg *At least two indoor units must be connected.	PORT A: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 *Either unit PORT B: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 *Either unit	7.7kW	1.6	•		
				2.0	•		
				2.5	•	•	•
				3.5	•	•	•
				4.2	•		
				5.0	•	•	•
Up to 3 rooms	CU-3Z54WBH-8  5.4kW Dimensions (H x W x D) : 795 x 875 (+95) x 320 mm / Weight : 71 kg *At least two indoor units must be connected.	PORT A: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 *Either unit PORT B: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 *Either unit PORT C: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 *Either unit	9.5kW	1.6	•		
				2.0	•		
				2.5	•	•	•
				3.5	•	•	•
				4.2	•		
				5.0	•	•	•
Up to 4 rooms	CU-4Z71WBH-8  7.1kW Dimensions (H x W x D) : 795 x 875 (+95) x 320 mm / Weight : 72 kg *At least two indoor units must be connected.	PORT A: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 *Either unit PORT B: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 *Either unit PORT C: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 *Either unit PORT D: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 *Either unit	11.5kW	1.6	•		
				2.0	•		
				2.5	•	•	•
				3.5	•	•	•
				4.2	•		
				5.0	•	•	•
				6.0	•	•	•

Connection of Outdoor and Indoor Units

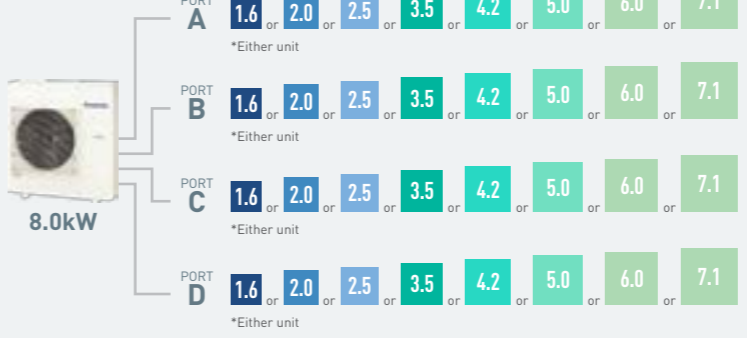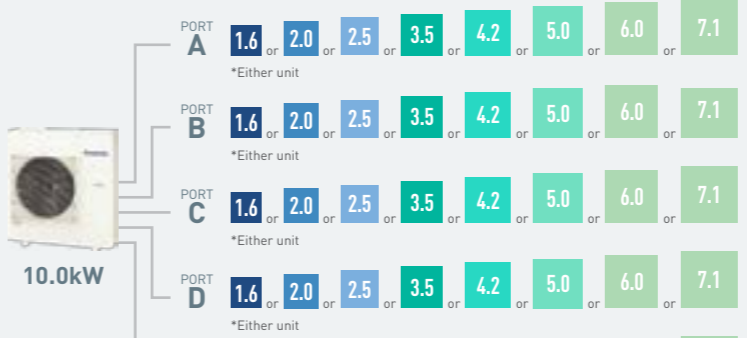	Models	Indoor Units: Possible Combination Patterns (Must be within capacity range)	Maximum Connectable Indoor Unit kW	Indoor unit combination			
				Capacity (kW class)	Wall-Mounted	Slim Ducted	Mini Cassette
Up to 4 rooms	CU-4Z80WBH-8  8.0kW Dimensions (H x W x D) : 999 x 940 x 340 mm / Weight : 80 kg *At least two indoor units must be connected.	PORT A: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit PORT B: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit PORT C: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit PORT D: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit	14.7kW	1.6	•		
				2.0	•		
				2.5	•	•	•
				3.5	•	•	•
				4.2	•		
				5.0	•	•	•
				6.0	•	•	•
				7.1	•		
Up to 5 rooms	CU-5Z100WBH-8  10.0kW Dimensions (H x W x D) : 999 x 940 x 340 mm / Weight : 81 kg *At least two indoor units must be connected.	PORT A: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit PORT B: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit PORT C: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit PORT D: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit PORT E: 1.6 or 2.0 or 2.5 or 3.5 or 4.2 or 5.0 or 6.0 or 7.1 *Either unit	18.3kW	1.6	•		
				2.0	•		
				2.5	•	•	•
				3.5	•	•	•
				4.2	•		
				5.0	•	•	•
				6.0	•	•	•
				7.1	•		

Accessories

 CZ-MA1P <small>*1 CZ-MA1P is to be used to reduce the connection size on the indoor unit from 1/2" to 3/8".</small>	 CZ-MA2P <small>*2 CZ-MA2P is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".</small>	 CZ-MA3P <small>*3 CZ-MA3P is to be used to reduce the connection size on the indoor unit from 5/8" to 1/2".</small>
--	---	--

Outdoor



Outdoor



Indoor Units

Cooling
Heating

Model		WALL-MOUNTED							
		CS-MR216WKH-8	CS-MR220WKH-8	CS-MR225WKH-8	CS-MR235WKH-8	CS-MR242WKH-8	CS-MR250WKH-8	CS-MR260WKH-8	CS-MR271WKH-8
Capacity	Cooling	1.6	2.0	2.5	3.5	4.2	5.0	6.0	7.1
	Heating	2.6	3.2	3.6	4.5	5.0	5.3	8.5	8.7
	Cooling	5,460	6,820	8,530	11,900	14,300	17,100	20,500	24,200
	Heating	8,870	10,900	12,300	15,300	17,100	18,100	29,000	29,700
Power Source		Single Phase, 220V - 240V, 50Hz							
Sound Pressure Level (H/L)	Cooling	41 / 27	42 / 27	42 / 27	46 / 28	46 / 33	46 / 36	48 / 38	51 / 39
	Heating	41 / 29	42 / 29	42 / 29	46 / 31	46 / 35	46 / 35	48 / 38	51 / 39
Air Circulation (H)	Cooling	11.0 [390]	11.3 [400]	11.0 [390]	11.6 [410]	11.6 [410]	12.8 [455]	21.2 [750]	23.1 [815]
	Heating	11.6 [410]	11.9 [420]	12.0 [425]	12.1 [430]	12.1 [430]	13.5 [475]	21.2 [750]	23.7 [835]
Dimension	Height	290	290	290	290	290	290	302	302
	Width	779	779	779	779	779	779	1,102	1,102
	Depth	209	209	209	209	209	209	244	244
Net Weight	kg	8	8	8	8	8	8	13	13
Refrigerant Pipe Diameter	Liquid Side	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35
	Gas Side	Ø 9.52	Ø 9.52	Ø 9.52	Ø 9.52	Ø 9.52 ^{*1}	Ø 9.52 ^{*1}	Ø 12.70 ^{*2}	Ø 12.70 ^{*2,3}
Power Supply		Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor

Model		SLIM DUCTED				4-WAY MINI CASSETTE			
		CS-MZ25WD3H8A	CS-MZ35WD3H8A	CS-MZ50WD3H8A	CS-MZ60WD3H8A	CS-MZ25WB4H8A	CS-MZ35WB4H8A	CS-MZ50WB4H8A	CS-MZ60WB4H8A
Capacity	Cooling	2.5	3.5	5.0	6.0	2.5	3.5	5.0	6.0
	Heating	3.6	4.5	5.3	8.5	3.6	4.5	5.3	8.5
	Cooling	8,530	11,900	17,100	20,500	8,530	11,900	17,100	20,500
	Heating	12,300	15,300	18,100	29,000	12,300	15,300	18,100	29,000
Power Source		Single Phase, 220V - 240V, 50Hz							
Sound Pressure Level (H/L)	Cooling	35 / 29	35 / 28	41 / 31	43 / 32	36 / 27	36 / 28	40 / 30	45 / 34
	Heating	36 / 29	37 / 29	41 / 32	43 / 34	37 / 30	39 / 30	41 / 31	47 / 34
Air Circulation (H)	Cooling	10.5 [370]	11.2 [395]	15.3 [540]	15.7 [555]	10.5 [370]	10.5 [370]	11.5 [405]	14.2 [500]
	Heating	10.8 [380]	11.2 [395]	15.3 [540]	15.7 [555]	10.8 [380]	11.7 [415]	11.8 [415]	15.2 [535]
Dimension	Height	200	200	200	200	260	260	260	260
	Width	750	750	750	750	575	575	575	575
	Depth	640	640	640	640	575	575	575	575
Net Weight	kg	19	19	19	19	18	18	18	18
Refrigerant Pipe Diameter	Liquid Side	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35
	Gas Side	Ø 9.52	Ø 9.52	Ø 9.52 ^{*1}	Ø 12.70 ^{*2}	Ø 9.52	Ø 9.52	Ø 9.52 ^{*1}	Ø 12.70 ^{*2}
Power Supply		Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor

*1 CZ-MA1P is to be used to reduce the connection size on the indoor unit from 1/2" to 3/8".
 *2 CZ-MA2P is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".
 *3 CZ-MA3P is to be used to reduce the connection size on the indoor unit from 5/8" to 1/2".

Outdoor Units

Cooling
Heating

Model		CU-2Z52WBH-8	CU-3Z54WBH-8	CU-4Z71WBH-8	CU-4Z80WBH-8	CU-5Z100WBH-8	
Cooling Operation Capacity	(min - max) kW	5.20 [1.50 - 6.00]	5.40 [1.80 - 7.30]	7.10 [1.90 - 8.80]	8.00 [2.30 - 9.20]	10.00 [2.30 - 11.50]	
	(min - max) Btu/h	17,700 [5,120 - 20,500]	18,400 [6,140 - 24,900]	24,200 [6,480 - 30,000]	27,300 [7,840 - 31,400]	34,100 [7,840 - 39,200]	
Power Source		Single Phase 220 - 240V, 50Hz					
Maximum Connectable Capacity	kW	7.7	9.5	11.5	14.7	18.3	
Maximum Connectable Indoors	Units	2	3	4	4	5	
Electrical Data	Running Current A	6.4 - 5.9	5.4 - 5.1	7.9 - 7.4	9.7 - 8.9	12.8 - 11.8	
	Power Input (min - max) W	1,350 [250 - 1,620]	1,120 [360 - 2,180]	1,660 [340 - 2,470]	1,980 [420 - 2,870]	2,600 [430 - 3,590]	
EER	(min - max) W/W	3.85 [6.00 - 3.70]	4.82 [5.00 - 3.35]	4.28 [5.59 - 3.56]	4.04 [5.48 - 3.21]	3.85 [5.35 - 3.20]	
	(min - max) Btu/hW	13.14 [20.47 - 12.62]	16.45 [17.06 - 11.43]	14.60 [19.07 - 12.15]	13.78 [18.70 - 10.95]	13.14 [18.25 - 10.92]	
Noise (H)	Sound Pressure Level dB(A)	51	48	49	51	53	
Heating Operation Capacity	(min - max) kW	6.10 [1.10-7.20]	7.00 [1.60-9.00]	8.50 [3.00-10.70]	9.40 [3.00-11.60]	12.00 [3.40-14.50]	
	(min - max) Btu/h	20,800[3,750-24,600]	23,900[5,460-30,700]	29,000[10,200-36,500]	32,100[10,200-39,600]	40,900[11,600-49,400]	
Electrical Data	Running Current A	6.7 - 6.2	7.3 - 6.8	9.2 - 8.6	10.2 - 9.3	13.1 - 12.1	
	Power Input (min - max) W	1,430 [210 - 1,900]	1,540 [320 - 2,630]	1,950 [500 - 2,720]	2,030 [500 - 3,420]	2,760 [580 - 4,020]	
COP	(min - max) W/W	4.27 [5.24 - 3.79]	4.55 [5.00 - 3.42]	4.36 [6.00 - 3.93]	4.63 [6.00 - 3.39]	4.35 [5.86 - 3.61]	
	(min - max) Btu/hW	14.57 [17.88 - 12.93]	15.52 [17.06 - 11.67]	14.88 [20.47 - 13.41]	15.80 [20.47 - 11.57]	14.87 [19.99 - 12.32]	
Noise (H)	Sound Pressure Level dB(A)	53	49	51	52	56	
Maximum Current	A	11.5	15.2	15.6	19.0	21.3	
Starting Current	A	6.7	7.3	9.2	10.2	13.1	
Compressor Output	W	900	1300	1300	1700	1700	
Dimensions	Height	619	795	795	999	999	
	Width	824 [+70]	875 [+95]	875 [+95]	940	940	
	Depth	299	320	320	340	340	
Net Weight	kg	39	71	72	80	81	
Refrigerant Pipe Diameter	Liquid Side	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	Ø 6.35	
	Gas Side	Ø 9.52	Ø 9.52	Ø 9.52	Ø 9.52	Ø 9.52	
Pipe Extension **	Chargeless Pipe Length	20	30	30	45	45	
	Maximum Pipe length	1 Room (m)	20	25	25	25	25
		Total (m)	30	50	60	70	80
	Maximum Elevation Length	m	10	15	15	15	15
Additional Refrigerant Gas	g/m	15	20	20	20	20	
Operating Range	Cooling	Degree (°C)	-10 ~ +46	-10 ~ +46	-10 ~ +46	-10 ~ +46	
	Heating	Degree (°C)	-15 ~ +24	-15 ~ +24	-15 ~ +24	-15 ~ +24	

** When pipes are not extended from the standard pipe length, the required amount of refrigerant is already in the unit.

Cooling Only Multi-Split Air Conditioning System



Wall-mounted



CS-MPS9SKH (2.8kW) / CS-MPS12SKH (3.2kW) / CS-MPS15SKH (4.0kW)



CS-MPS18SKH (5.0kW) / CS-MPS24SKH (6.0kW)* / CS-MPS28SKH (7.0kW)*


INVERTER

ANTI-BACTERIAL FILTER

Features

- Wireless Remote Controller Included
- CZ-RD514C Wired Remote Controller (Optional)
- CZ-TACG1 Network Adaptor* (Optional)
- Random
- 24h
- Optional
- Optional
- Optional
- Optional
- Optional
- Optional

Slim Ducted



CS-MS9SD3H (2.8kW) / CS-MS12SD3H (3.2kW) / CS-MS18SD3H (5.0kW) / CS-MS24SD3H (6.0kW)*

INVERTER


Features

- Wireless Remote Controller Included
- CZ-TACG1 Network Adaptor* (Optional)
- Random
- 24h
- Optional
- Optional
- Optional
- Optional
- Optional
- Optional
- Optional

Connection of Outdoor and Indoor Units

Models	Indoor Units: Possible Combination Patterns (Must be within capacity range)	Maximum Connectable Indoor Unit kW	Indoor unit combination		
			Capacity (kW class)	Wall-Mounted	Slim Ducted
Up to 2 rooms CU-2S18SKH 5.0kW Dimensions (H x W x D) : 619 x 824 (+70) x 299 mm / Weight : 37 kg *At least two indoor units must be connected.	 <p>PORT A: 2.8 or 3.2 *Either unit</p> <p>PORT B: 2.8 or 3.2 *Either unit</p>	6.4kW	2.8	•	•
			3.2	•	•
Up to 3 rooms CU-3S27SBH 7.5kW Dimensions (H x W x D) : 695 x 875 (+95) x 320 mm / Weight : 57 kg *At least two indoor units must be connected.	 <p>PORT A: 2.8 or 3.2 or 4.0 or 5.0 *Either unit</p> <p>PORT B: 2.8 or 3.2 or 4.0 or 5.0 *Either unit</p> <p>PORT C: 2.8 or 3.2 or 4.0 or 5.0 *Either unit</p>	13.2kW	2.8	•	•
			3.2	•	•
			4.0	•	
			5.0	•	•
Up to 3 rooms CU-3S28SBH 7.5kW Dimensions (H x W x D) : 795 x 875 (+95) x 320 mm / Weight : 68 kg *At least two indoor units must be connected.	 <p>PORT A: 2.8 or 3.2 or 4.0 or 5.0 or 6.0 *Either unit</p> <p>PORT B: 2.8 or 3.2 or 4.0 or 5.0 or 6.0 *Either unit</p> <p>PORT C: 2.8 or 3.2 or 4.0 or 5.0 or 6.0 *Either unit</p>	13.2kW	2.8	•	•
			3.2	•	•
			4.0	•	
			5.0	•	•
			6.0	•	•

Outdoor

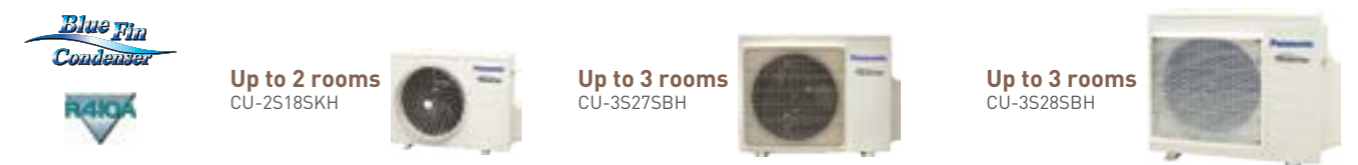

*1 CZ-MA2P is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".
* Wireless LAN Remote Control for Internet Connection required optional network adaptor. Indoor temperature display and some function are not available through the App for all models.

Connection of Outdoor and Indoor Units

Models	Indoor Units: Possible Combination Patterns (Must be within capacity range)	Maximum Connectable Indoor Unit kW	Indoor unit combination		
			Capacity (kW class)	Wall-Mounted	Slim Ducted
CU-4S27SBH  7.5kW Dimensions (H x W x D) : 695 x 875 (+95) x 320 mm / Weight : 57 kg *At least two indoor units must be connected.	PORT A 2.8 or 3.2 or 4.0 or 5.0 *Either unit	13.4kW	2.8	•	•
	PORT B 2.8 or 3.2 or 4.0 or 5.0 *Either unit		3.2	•	•
	PORT C 2.8 or 3.2 or 4.0 or 5.0 *Either unit		4.0	•	
	PORT D 2.8 or 3.2 or 4.0 or 5.0 *Either unit		5.0	•	•
CU-4S34SBH  10.0kW Dimensions (H x W x D) : 999 x 940 x 340 mm / Weight : 76 kg *At least two indoor units must be connected.	PORT A 2.8 or 3.2 or 4.0 or 5.0 or 6.0 or 7.0 *Either unit	17.4kW	2.8	•	•
	PORT B 2.8 or 3.2 or 4.0 or 5.0 or 6.0 or 7.0 *Either unit		3.2	•	•
	PORT C 2.8 or 3.2 or 4.0 or 5.0 or 6.0 or 7.0 *Either unit		4.0	•	
	PORT D 2.8 or 3.2 or 4.0 or 5.0 or 6.0 or 7.0 *Either unit		5.0	•	•
			6.0	•	•
		7.0	•		

Accessories



CZ-MA2P

*1 CZ-MA2P is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".

Indoor Units

Model	WALL-MOUNTED					
	CS-MPS9SKH	CS-MPS12SKH	CS-MPS15SKH	CS-MPS18SKH	CS-MPS24SKH	CS-MPS28SKH
Cooling Capacity	kW	2.80	3.20	4.00	5.00	7.00
	Btu/h	9,550	10,900	13,600	17,100	23,900
Power Source	Single Phase, 220V - 240V, 50Hz					
Sound Pressure Level (H/L)	dB(A)	40 / 29	44 / 32	45 / 32	47 / 38	48 / 39
Air Circulation (H)	m ³ /min.	10.1	10.9	11.2	18.1	19.0
	cfm	355	385	395	640	670
Dimensions	Height	mm	290	290	290	290
	Width	mm	870	870	870	1,070
	Depth	mm	214	214	214	240
Net Weight	kg	9	9	9	12	12
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side	mm	ø 9.52	ø 9.52	ø 9.52	ø 12.70 ¹
Power Supply		Outdoor	Outdoor	Outdoor	Outdoor	Outdoor

Model	SLIM DUCTED			
	CS-MS9SD3H	CS-MS12SD3H	CS-MS18SD3H	CS-MS24SD3H
Cooling Capacity	kW	2.80	3.20	6.00
	Btu/h	9,550	10,900	20,500
Power Source	Single Phase, 220V - 240V, 50Hz			
Sound Pressure Level (H/L)	dB(A)	35 / 28	35 / 28	41 / 30
Air Circulation (H)	m ³ /min.	13.2	13.2	15.5
	cfm	465	465	545
Dimensions	Height	mm	200	200
	Width	mm	750	750
	Depth	mm	640	640
Net Weight	kg	19	19	19
Refrigerant Pipe Diameter	Liquid Side	mm	ø 6.35	ø 6.35
	Gas Side	mm	ø 9.52	ø 9.52
Power Supply		Outdoor	Outdoor	Outdoor

*1 CZ-MA2P is to be used to increase the connection size on the outdoor unit from 3/8" to 1/2".

Outdoor



Up to 4 rooms
CU-4S27SBH



Up to 4 rooms
CU-4S34SBH



Outdoor Units


Model		CU-2S18SKH	CU-3S27SBH	CU-3S28SBH	CU-4S27SBH	CU-4S34SBH
Cooling Capacity	(min - max) kW	5.00 (1.50 - 6.00)	7.50 (2.80 - 8.00)	7.50 (2.80 - 9.00)	7.50 (2.80 - 8.00)	10.0 (2.90 - 11.00)
	(min - max) Btu/h	17,100 (5,120 - 20,500)	25,600 (9,550 - 27,300)	25,600 (9,550 - 30,700)	25,600 (9,550 - 27,300)	34,100 (9,890 - 37,500)
Power Source		Single Phase, 220V - 240V, 50Hz				
Maximum Connectable Capacity	kW	6.4	13.2	13.2	13.4	17.4
Maximum Connectable Indoor	Units	2	3	3	4	4
Electrical Data	Running Current A	6.8 - 6.2	10.2 - 9.4	10.1 - 9.2	10.2 - 9.4	13.5 - 12.4
	Power Input (min - max) W	1,430 (250-1,780)	2,060 (520-2,650)	2,060 (520-2,830)	2,060 (520-2,530)	2,800 (560-3,460)
EER	W/W	3.50	3.64	3.64	3.64	3.57
	Btu/hW	11.96	12.43	12.43	12.43	12.18
Noise (H)	Sound Pressure Level dB(A)	50	49	49	49	52
Maximum Current	A	12.0	15.2	15.2	15.2	21.3
Starting Current	A	6.8	10.2	10.1	10.2	13.5
Compressor Output	W	900	1,300	1,300	1,300	1,700
Dimensions	Height mm	619	695	795	695	999
	Width mm	824 (+70)	875 (+95)	875 (+95)	875 (+95)	940
	Depth mm	299	320	320	320	340
Net Weight	kg	37	57	68	57	76
Refrigerant Pipe Diameter	Liquid Side mm	ø 6.35	ø 6.35	ø 6.35	ø 6.35	ø 6.35
	Gas Side mm	ø 9.52	ø 9.52	ø 9.52	ø 9.52	ø 9.52
Pipe Extension**	Chargeless Pipe Length m	20	30	30	35	45
	Maximum Pipe Length	1 Room (m)	20	25	25	25
		Total (m)	30	60	60	60
	Maximum Elevation Length m	10	15	15	15	15
Additional Refrigerant Gas*	g/m	15	20	20	20	20
Operating Range	Degree [°C]	+16°C ~ +43°C	+16°C ~ +43°C	+16°C ~ +43°C	+16°C ~ +43°C	+16°C ~ +43°C

** When pipes are not extended from the standard pipe length, the required amount of refrigerant is already in the unit.


Features Explanation

COMFORT


SLEEP MODE
Delays off timer with temperature control for better sleep.




SOFT DRY OPERATION MODE
Starts with cooling to dehumidify, then provides continuous breeze at a low frequency to keep a room dry without much change to the temperature.




INVERTER CONTROL
Varies the rotation speed of the compressor for higher energy savings.




PERSONAL AIRFLOW CREATION
Vertical and horizontal airflow patterns can be combined as desired to achieve optimum comfort, with operation possible by remote even from a distance.




QUIET MODE
Enjoy the comfort of running your air conditioner at night and still have a relaxing sleep.




AIRFLOW DIRECTION CONTROL (UP & DOWN)
Vertical airflow patterns can be controlled with operation by remote, even from a distance.




POWERFUL MODE
Pressing the Powerful button cools or heats the room quickly. It provides fast comfort, with full power and a strong airflow. This is perfect for use immediately after coming home, or when unexpected guests arrive.




MANUAL HORIZONTAL AIRFLOW DIRECTION CONTROL




AUTOMATIC OPERATION MODE (COOLING)




HOT START CONTROL
On the start of the heating cycle and after the defrost cycle, the indoor fan will start up once the indoor heat exchanger is warm.



AUTO CHANGEOVER (INVERTER)
In Auto Mode the unit will select if heating or cooling is required.




ECO MODE WITH A.I. / ECO MODE
More energy saving compared to the normal mode by automatically adjusting the set temperature by up to 2°C. It's ideal when you want to maintain room temperature for gentle cooling and heating.




CLEANER AIR


ANTI-BACTERIAL FILTER
The Anti-Bacterial Filter combines three effects in one: anti-allergen, anti-virus and anti-bacteria protection to provide clean air.




ODOUR-REMOVING FUNCTION
With this function, there's no unpleasant odor when the unit starts up. That's because the fan remains off momentarily, while the source of the odour inside the air conditioner is suppressed.



REMOVABLE, WASHABLE PANEL
Gives you easy access to the filter as well making the unit easy to clean.




ONE-TOUCH AIR FILTER




CONVENIENCE


24-HOUR DUAL ON & OFF REAL SETTING TIMER
This feature enables you to preset two different sets of start/stop operation timer (hour and minute) within a 24-hour time frame.




WIRED REMOTE CONTROL
For use in commercial applications, or where users don't want a remote control.




24-HOUR ON & OFF REAL SETTING TIMER
The exact operating time (hour and minute) of the air conditioner can be set in advance. From here on, the unit will operate in accordance to these preset hours every day until the system is reset.




BUILT-IN DRAIN PUMP




WIRELESS LAN REMOTE CONTROL FOR INTERNET CONNECTION
Control air conditioners remotely by turning your mobile device into a remote controller using internet connection.



LCD WIRELESS REMOTE CONTROL
Easy control of the unit from anywhere in the room.




BOTTOM AIR INTAKE




RELIABILITY


RANDOM AUTO RESTART
When multiple units are connected and there is a power outage, they will turn on at different times in order to not spike the power supply.




TOP-PANEL MAINTENANCE ACCESS
Easy access for maintenance.



SELF-DIAGNOSTIC FUNCTION
Should a malfunction occur, the unit diagnoses the problem and shows the corresponding alphanumeric code. This allows for quicker servicing.



BLUE FIN CONDENSER
Extra protection from the elements with a longer lasting coil.



MODEL	R32 COOLING & HEATING				R410A COOLING ONLY				
	WALL-MOUNTED		SLIM DUCTED	4-WAY MINI CASSETTE	WALL-MOUNTED		SLIM DUCTED		
	CS-MRZ16WKH-8 CS-MRZ20WKH-8 CS-MRZ25WKH-8	CS-MRZ35WKH-8 CS-MRZ42WKH-8 CS-MRZ50WKH-8	CS-MRZ60WKH-8 CS-MRZ71WKH-8	CS-MZ25WD3H8A CS-MZ35WD3H8A	CS-MZ50WD3H8A CS-MZ60WD3H8A	CS-MZ25WB4H8A CS-MZ50WB4H8A	CS-MZ35WB4H8A CS-MZ60WB4H8A	CS-MPS9SKH CS-MPS12SKH CS-MPS15SKH	CS-MPS18SKH CS-MPS24SKH CS-MPS28SKH
COMFORT									
SLEEP	SLEEP MODE	•							
INVERTER CONTROL		•	•	•	•	•	•	•	•
QUIET MODE		•	•	•	•	•			•
POWERFUL MODE		•	•	•	•	•			•
SOFT DRY OPERATION MODE		•	•	•	•	•	•	•	•
PERSONAL AIRFLOW CREATION			•						
AIRFLOW DIRECTION CONTROL (UP & DOWN)		•			•	•	•	•	
MANUAL HORIZONTAL AIRFLOW DIRECTION CONTROL		•			•	•	•	•	
AUTOMATIC OPERATION MODE (COOLING)						•	•	•	•
HOT START CONTROL		•	•	•	•				
AUTO CHANGEOVER (INVERTER)		•	•	•	•				
ECO MODE WITH A.I.		•							
ECO MODE			•						
CLEANER AIR									
ANTI-BACTERIAL FILTER		•	•				•	•	
ODOUR-REMOVING FUNCTION		•	•	•	•	•	•	•	•
REMOVABLE, WASHABLE PANEL		•	•		•	•	•	•	
ONE-TOUCH AIR FILTER				•	•				•
CONVENIENCE									
24-HOUR DUAL ON & OFF REAL SETTING TIMER		•	•		•				•
24-HOUR ON & OFF REAL SETTING TIMER						•		•	
LCD WIRELESS REMOTE CONTROL		•	•		•	•	•	•	•
WIRED REMOTE CONTROL		• [Optional]	• [Optional]	•	• [Optional]	• [Optional]	• [Optional]	• [Optional]	• [Optional]
BOTTOM AIR INTAKE				•					•
BUILT-IN DRAIN PUMP				•	•				•
WIRELESS LAN REMOTE CONTROL FOR INTERNET CONNECTION		• [Optional]	• [Optional]	• [Optional]	• [Optional]	• [Optional]	• [Optional]	• [Optional]	• [Optional]
RELIABILITY									
RANDOM AUTO RESTART		•	•	•	•	•	•	•	•
BLUE FIN CONDENSER		•	•	•	•	•	•	•	•
TOP-PANEL MAINTENANCE ACCESS		•	•	•	•	•	•	•	•
SELF-DIAGNOSTIC FUNCTION		•	•	•	•	•	•	•	•

CU-2Z52WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION														
		Cooling Capacity [kW]					Input Power [W]					Heating Capacity [kW]					Input Power [W]									
		Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V
1 Room	16	1.60	-	-	-	1.60	1.1	2.3	430	220	620	2.20	2.00	2.60	-	-	-	-	2.60	0.7	3.8	730	170	1150	3.60	3.30
	20	2.00	-	-	-	2.00	1.1	2.9	540	220	790	2.70	2.50	3.20	-	-	-	-	3.20	0.7	4.8	890	170	1450	4.30	4.00
	25	2.50	-	-	-	2.50	1.1	3.5	690	220	1020	3.40	3.10	3.60	-	-	-	-	3.60	0.7	5.5	1070	170	1740	5.20	4.80
	35	3.50	-	-	-	3.50	1.1	4.0	1030	220	1240	5.10	4.60	4.50	-	-	-	-	4.50	0.7	6.2	1290	170	1850	6.30	5.70
	42	4.20	-	-	-	4.20	1.1	4.5	1380	220	1520	6.80	6.20	5.00	-	-	-	-	5.00	1.1	6.4	1590	210	2220	7.70	7.10
50	5.00	-	-	-	5.00	1.2	5.1	1710	230	1810	8.30	7.60	5.30	-	-	-	-	5.30	1.1	6.8	1680	210	2330	8.10	7.50	
2 Rooms	16+16	1.60	1.60	-	-	3.20	1.5	4.0	680	250	990	3.30	3.00	2.60	2.60	-	-	-	5.20	1.1	7.0	1210	210	1910	5.70	5.20
	16+20	1.60	2.00	-	-	3.60	1.5	4.5	780	250	1150	3.80	3.50	2.40	3.00	-	-	-	5.40	1.1	7.0	1260	210	1890	5.90	5.40
	16+25	1.60	2.50	-	-	4.10	1.5	5.2	900	250	1370	4.40	4.00	2.20	3.40	-	-	-	5.60	1.1	7.0	1310	210	1890	6.20	5.70
	16+35	1.65	3.55	-	-	5.20	1.5	6.0	1350	250	1620	6.40	5.90	1.90	4.20	-	-	-	6.10	1.1	7.0	1430	210	1890	6.70	6.20
	16+42	1.45	3.75	-	-	5.20	1.5	6.0	1350	250	1620	6.40	5.90	1.70	4.40	-	-	-	6.10	1.1	7.2	1430	210	1900	6.70	6.20
	16+50	1.25	3.95	-	-	5.20	1.5	6.0	1350	250	1620	6.40	5.90	1.50	4.60	-	-	-	6.10	1.1	7.2	1430	210	1900	6.70	6.20
	20+20	2.00	2.00	-	-	4.00	1.5	5.0	890	250	1310	4.30	4.00	2.80	2.80	-	-	-	5.60	1.1	7.0	1310	210	1870	6.20	5.70
	20+25	2.00	2.50	-	-	4.50	1.5	5.2	1030	250	1370	4.90	4.50	2.60	3.20	-	-	-	5.80	1.1	7.0	1360	210	1870	6.40	5.90
	20+35	1.90	3.30	-	-	5.20	1.5	6.0	1350	250	1620	6.40	5.90	2.20	3.90	-	-	-	6.10	1.1	7.2	1430	210	1900	6.70	6.20
	20+42	1.70	3.50	-	-	5.20	1.5	6.0	1350	250	1620	6.40	5.90	1.95	4.15	-	-	-	6.10	1.1	7.2	1430	210	1900	6.70	6.20
	20+50	1.50	3.70	-	-	5.20	1.5	6.0	1350	250	1620	6.40	5.90	1.75	4.35	-	-	-	6.10	1.1	7.2	1430	210	1900	6.70	6.20
	25+25	2.60	2.60	-	-	5.20	1.5	6.0	1350	250	1620	6.40	5.90	3.05	3.05	-	-	-	6.10	1.1	7.2	1430	210	1900	6.70	6.20
	25+35	2.15	3.05	-	-	5.20	1.5	6.0	1350	250	1620	6.40	5.90	2.55	3.55	-	-	-	6.10	1.1	7.2	1430	210	1900	6.70	6.20
	25+42	1.95	3.25	-	-	5.20	1.5	6.0	1350	250	1620	6.40	5.90	2.30	3.80	-	-	-	6.10	1.1	7.2	1430	210	1900	6.70	6.20
	25+50	1.75	3.45	-	-	5.20	1.5	6.0	1350	250	1620	6.40	5.90	2.05	4.05	-	-	-	6.10	1.1	7.2	1430	210	1900	6.70	6.20
	35+35	2.60	2.60	-	-	5.20	1.5	6.0	1350	250	1620	6.40	5.90	3.05	3.05	-	-	-	6.10	1.1	7.2	1430	210	1900	6.70	6.20
	35+42	2.35	2.85	-	-	5.20	1.5	6.0	1350	250	1620	6.40	5.90	2.75	3.35	-	-	-	6.10	1.1	7.2	1430	210	1900	6.70	6.20

CU-2Z52WBH-8: Free Multi Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION														
		Cooling Capacity [kW]					Input Power [W]					Heating Capacity [kW]					Input Power [W]									
		Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V
1 Room	16	1.60	-	-	-	1.60	1.1	2.3	460	220	650	2.30	2.10	2.60	-	-	-	-	2.60	0.7	3.8	760	170	1180	3.70	3.40
	20	2.00	-	-	-	2.00	1.1	2.9	570	220	820	2.80	2.60	3.20	-	-	-	-	3.20	0.7	4.8	920	170	1480	4.50	4.10
	25	2.50	-	-	-	2.50	1.1	3.5	720	220	1050	3.60	3.30	3.60	-	-	-	-	3.60	0.7	5.5	1100	170	1770	5.30	4.90
	35	3.50	-	-	-	3.50	1.1	4.0	1060	220	1270	5.20	4.80	4.50	-	-	-	-	4.50	0.7	6.2	1320	170	1880	6.40	5.90
	42	4.20	-	-	-	4.20	1.1	4.5	1410	220	1550	6.90	6.40	5.00	-	-	-	-	5.00	1.1	6.4	1620	210	2250	7.90	7.20
50	5.00	-	-	-	5.00	1.2	5.1	1740	230	1840	8.40	7.70	5.30	-	-	-	-	5.30	1.1	6.8	1710	210	2360	8.30	7.60	
2 Rooms	16+16	1.60	1.60	-	-	3.20	1.5	4.0	740	250	1050	3.60	3.30	2.60	2.60	-	-	-	5.20	1.1	7.0	1270	210	1970	6.00	5.50
	16+20	1.60	2.00	-	-	3.60	1.5	4.5	840	250	1210	4.10	3.70	2.40	3.00	-	-	-	5.40	1.1	7.0	1320	210	1950	6.20	5.70
	16+25	1.60	2.50	-	-	4.10	1.5	5.2	960	250	1430	4.70	4.30	2.20	3.40	-	-	-	5.60	1.1	7.0	1370	210	1950	6.40	5.90
	16+35	1.65	3.55	-	-	5.20	1.5	6.0	1410	250	1680	6.70	6.10	1.90	4.20	-	-	-	6.10	1.1	7.0	1490	210	1950	7.00	6.40
	16+42	1.45	3.75	-	-	5.20	1.5	6.0	1410	250	1680	6.70	6.10	1.70	4.40	-	-	-	6.10	1.1	7.2	1490	210	1960	7.00	6.40
	16+50	1.25	3.95	-	-	5.20	1.5	6.0	1410	250	1680	6.70	6.10	1.50	4.60	-	-	-	6.10	1.1	7.2	1490	210	1960	7.00	6.40
	20+20	2.00	2.00	-	-	4.00	1.5	5.0	950	250	1370	4.60	4.20	2.80	2.80	-	-	-	5.60	1.1	7.0	1370	210	1930	6.40	5.90
	20+25	2.00	2.50	-	-	4.50	1.5	5.2	810	250	1430	3.90	3.50	2.60	3.20	-	-	-	5.80	1.1	7.0	1420	210	1930	6.70	6.10
	20+35	1.90	3.30	-	-	5.20	1.5	6.0	1410	250	1680	6.70	6.10	2.20	3.90	-	-	-	6.10	1.1	7.2	1490	210	1960	7.00	6.40
	20+42	1.70	3.50	-	-	5.20	1.5	6.0	1410	250	1680	6.70	6.10	1.95	4.15	-	-	-	6.10	1.1	7.2	1490	210	1960	7.00	6.40
	20+50	1.50	3.70	-	-	5.20	1.5	6.0	1410	250	1680	6.70	6.10	1.75	4.35	-	-	-	6.10	1.1	7.2	1490	210	1960	7.00	6.40
	25+25	2.60	2.60	-	-	5.20	1.5	6.0	1410	250	1680	6.70	6.10	3.05	3.05	-	-	-	6.10	1.1	7.2	1490	210	1960	7.00	6.40
	25+35	2.15	3.05	-	-	5.20	1.5	6.0	1410	250	1680	6.70	6.10	2.55	3.55	-	-	-	6.10	1.1	7.2	1490	210	1960	7.00	6.40
	25+42	1.95	3.25	-	-	5.20	1.5	6.0	1410	250	1680	6.70	6.10	2.30	3.80	-	-	-	6.10	1.1	7.2	1490	210	1960	7.00	6.40
	25+50	1.75	3.45	-	-	5.20	1.5	6.0	1410	250	1680	6.70	6.10	2.05	4.05	-	-	-	6.10	1.1	7.2	1490	210	1960	7.00	6.40
	35+35	2.60	2.60	-	-	5.20	1.5	6.0	1410	250	1680	6.70	6.10	3.05	3.05	-	-	-	6.10	1.1	7.2	1490	210	1960	7.00	6.40
	35+42	2.35	2.85	-	-	5.20	1.5	6.0	1410	250	1680	6.70	6.10	2.75	3.35	-	-	-	6.10	1.1	7.2	1490	210	1960	7.00	6.40

• Specification based on JIS C 9612 standard.
• A minimum of 2 indoor units must be connected.

CU-3Z54WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity		COOLING OPERATION										HEATING OPERATION														
		Cooling Capacity [kW]					Input Power [W]					Heating Capacity [kW]					Input Power [W]									
		Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V
1 Room	16	1.60	-	-	-	1.60	1.3	2.3	420	250	660	2.2	2.0	2.60	-	-	-	-	2.60	1.2	3.2	640	290	1000	3.3	3.0
	20	2.00	-	-	-	2.00	1.8	2.9	520	340	830	2.7	2.5	3.20	-	-	-	-	3.20	1.2	4.1	780	290	1270	4.0	3.7
	25	2.50	-	-	-	2.50	1.8	2.9	650	340	830	3.2	2.9	3.60	-	-	-	-	3.60	1.2	4.3	980	290	1270	4.9	4.5
	35	3.50	-	-	-	3.50	1.8	3.8	960	340	1380	4.5	4.2	4.50	-	-	-	-	4.50	1.2	5.8	1270	290	2140	6.3	5.8
	42	4.20	-	-	-	4.20	1.8	4.3	1390	340	2010	6.5	6.0	5.60	-	-	-	-	5.60	1.2	6.8	1760	290	2970	8.2	7.5
50	5.00	-	-	-	5.00	1.9	5.4	1630	340	2150	7.9	7.3	6.80	-	-	-										

CU-3Z54WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION										HEATING OPERATION												
	Cooling Capacity [kW]					Input Power [W]		Current [A]		Heating Capacity [kW]					Input Power [W]		Current [A]						
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	
1 Room	16	1.60	-	-	-	1.60	1.3 ~ 2.3	450	250 ~ 690	2.4	2.2	2.60	-	-	-	-	2.60	1.2 ~ 3.2	700	290 ~ 1060	3.5	3.2	
	20	2.00	-	-	-	2.00	1.8 ~ 2.9	550	340 ~ 860	2.8	2.6	3.20	-	-	-	-	3.20	1.2 ~ 4.1	840	290 ~ 1330	4.3	3.9	
	25	2.50	-	-	-	2.50	1.8 ~ 2.9	680	340 ~ 860	3.4	3.1	3.60	-	-	-	-	3.60	1.2 ~ 4.3	1040	290 ~ 1330	5.2	4.7	
	35	3.50	-	-	-	3.50	1.8 ~ 3.8	990	340 ~ 1410	4.7	4.3	4.50	-	-	-	-	4.50	1.2 ~ 5.8	1330	290 ~ 2200	6.6	6.1	
	42	4.20	-	-	-	4.20	1.8 ~ 4.3	1420	340 ~ 2040	6.7	6.1	5.60	-	-	-	-	5.60	1.2 ~ 6.8	1820	290 ~ 3030	8.4	7.7	
50	5.00	-	-	-	5.00	1.9 ~ 5.4	1630	340 ~ 2150	7.9	7.3	6.80	-	-	-	-	6.80	1.2 ~ 6.9	2350	290 ~ 2840	11.3	10.4		
2 Rooms	16+16	1.60	1.60	-	-	3.20	1.8 ~ 6.2	690	330 ~ 2190	3.5	3.2	2.60	2.60	-	-	-	5.20	1.4 ~ 7.0	1460	340 ~ 2190	7.0	6.4	
	16+20	1.60	2.00	-	-	3.60	1.8 ~ 6.2	830	330 ~ 2150	4.1	3.7	2.58	3.22	-	-	-	5.80	1.4 ~ 7.0	1640	330 ~ 2150	7.8	7.2	
	16+25	1.60	2.50	-	-	4.10	1.8 ~ 6.2	980	330 ~ 2150	4.8	4.4	2.42	3.78	-	-	-	6.20	1.4 ~ 7.0	1770	330 ~ 2150	8.4	7.7	
	16+35	1.60	3.50	-	-	5.10	1.8 ~ 6.3	1410	330 ~ 2160	6.7	6.2	2.20	4.80	-	-	-	7.00	1.4 ~ 7.3	2020	290 ~ 2250	9.6	8.8	
	16+42	1.49	3.91	-	-	5.40	1.9 ~ 6.4	1560	350 ~ 2200	7.5	6.8	1.93	5.07	-	-	-	7.00	1.4 ~ 7.3	2010	310 ~ 2240	9.5	8.7	
	16+50	1.31	4.09	-	-	5.40	1.9 ~ 6.8	1380	340 ~ 2140	6.6	6.0	1.70	5.30	-	-	-	7.00	1.4 ~ 8.0	1830	270 ~ 2350	8.7	7.9	
	20+20	2.00	2.00	-	-	4.00	1.8 ~ 6.2	950	330 ~ 2110	4.6	4.2	3.20	3.20	-	-	-	6.40	1.4 ~ 7.0	1830	320 ~ 2150	8.7	7.9	
	20+25	2.00	2.50	-	-	4.50	1.8 ~ 6.2	1140	330 ~ 2110	5.5	5.0	3.02	3.78	-	-	-	6.80	1.4 ~ 7.0	1960	290 ~ 2150	9.3	8.5	
	20+35	1.96	3.44	-	-	5.40	1.8 ~ 6.3	1530	330 ~ 2120	7.3	6.7	2.55	4.45	-	-	-	7.00	1.4 ~ 7.3	2010	280 ~ 2240	9.5	8.7	
	20+42	1.74	3.66	-	-	5.40	1.9 ~ 6.4	1530	350 ~ 2160	7.3	6.7	2.26	4.74	-	-	-	7.00	1.4 ~ 7.3	1970	300 ~ 2200	9.3	8.5	
	20+50	1.54	3.86	-	-	5.40	1.9 ~ 6.8	1340	340 ~ 2140	6.4	5.9	2.00	5.00	-	-	-	7.00	1.4 ~ 8.0	1820	270 ~ 2350	8.6	7.9	
	25+25	2.50	2.50	-	-	5.00	1.8 ~ 6.2	1380	330 ~ 2110	6.6	6.0	3.50	3.50	-	-	-	7.00	1.4 ~ 7.2	2020	290 ~ 2220	9.6	8.8	
	25+35	2.25	3.15	-	-	5.40	1.9 ~ 6.3	1530	350 ~ 2120	7.3	6.7	2.92	4.08	-	-	-	7.00	1.4 ~ 7.3	2010	280 ~ 2240	9.5	8.7	
	25+42	2.01	3.39	-	-	5.40	1.9 ~ 6.4	1530	350 ~ 2160	7.3	6.7	2.61	4.39	-	-	-	7.00	1.4 ~ 7.3	1970	280 ~ 2200	9.3	8.5	
	25+50	1.80	3.60	-	-	5.40	1.9 ~ 6.8	1340	340 ~ 2140	6.4	5.9	2.33	4.67	-	-	-	7.00	1.4 ~ 8.0	1820	240 ~ 2350	8.6	7.9	
	35+35	2.70	2.70	-	-	5.40	1.9 ~ 6.4	1490	350 ~ 2120	7.1	6.5	3.50	3.50	-	-	-	7.00	1.4 ~ 7.5	1960	270 ~ 2260	9.3	8.5	
	35+42	2.45	2.95	-	-	5.40	1.9 ~ 6.5	1490	350 ~ 2170	7.1	6.5	3.18	3.82	-	-	-	7.00	1.4 ~ 7.5	1950	260 ~ 2260	9.2	8.5	
	35+50	2.22	3.18	-	-	5.40	1.9 ~ 6.9	1340	360 ~ 2140	6.4	5.9	2.88	4.12	-	-	-	7.00	1.4 ~ 8.0	1800	240 ~ 2280	8.5	7.8	
42+42	2.70	2.70	-	-	5.40	1.9 ~ 6.5	1490	350 ~ 2170	7.1	6.5	3.50	3.50	-	-	-	7.00	1.4 ~ 7.6	1910	260 ~ 2290	9.0	8.3		
42+50	2.47	2.93	-	-	5.40	1.9 ~ 6.9	1340	360 ~ 2140	6.4	5.9	3.20	3.80	-	-	-	7.00	1.4 ~ 8.0	1800	240 ~ 2280	8.5	7.8		
3 Rooms	16+16+16	1.60	1.60	1.60	-	-	4.80	1.8 ~ 7.2	1020	360 ~ 2230	5.0	4.6	2.33	2.33	2.33	-	-	6.99	1.5 ~ 8.1	1730	290 ~ 2450	8.2	7.6
	16+16+20	1.66	1.66	2.08	-	-	5.40	1.8 ~ 7.3	1210	360 ~ 2270	5.8	5.5	2.15	2.15	2.70	-	-	7.00	1.6 ~ 9.0	1720	320 ~ 2810	8.1	7.6
	16+16+25	1.52	1.52	2.36	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2180	5.8	5.5	1.96	1.96	3.08	-	-	7.00	1.6 ~ 9.0	1720	320 ~ 2810	8.1	7.6
	16+16+35	1.29	1.29	2.82	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2140	5.8	5.5	1.67	1.67	3.66	-	-	7.00	1.6 ~ 9.0	1700	340 ~ 2790	8.0	7.5
	16+16+42	1.17	1.17	3.06	-	-	5.40	1.8 ~ 7.3	1210	390 ~ 2180	5.8	5.5	1.51	1.51	3.98	-	-	7.00	1.6 ~ 9.0	1690	310 ~ 2740	8.0	7.5
	16+16+50	1.05	1.05	3.30	-	-	5.40	1.8 ~ 7.3	1140	420 ~ 2010	5.5	5.1	1.37	1.37	4.26	-	-	7.00	1.6 ~ 9.0	1590	330 ~ 2590	7.5	7.0
	16+20+20	1.54	1.93	1.93	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2180	5.8	5.5	2.00	2.50	2.50	-	-	7.00	1.6 ~ 9.0	1710	310 ~ 2800	8.1	7.6
	16+20+25	1.42	1.77	2.21	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2180	5.8	5.5	1.84	2.30	2.86	-	-	7.00	1.6 ~ 9.0	1710	310 ~ 2800	8.1	7.6
	16+20+35	1.22	1.52	2.66	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2100	5.8	5.5	1.58	1.97	3.45	-	-	7.00	1.6 ~ 9.0	1690	340 ~ 2740	8.0	7.5
	16+20+42	1.11	1.38	2.91	-	-	5.40	1.8 ~ 7.3	1210	390 ~ 2180	5.8	5.5	1.44	1.79	3.77	-	-	7.00	1.6 ~ 9.0	1690	310 ~ 2730	8.0	7.5
	16+20+50	1.00	1.26	3.14	-	-	5.40	1.8 ~ 7.3	1140	420 ~ 1970	5.5	5.1	1.30	1.63	4.07	-	-	7.00	1.6 ~ 9.0	1590	340 ~ 2580	7.5	7.0
	16+25+25	1.30	2.05	2.05	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2180	5.8	5.5	1.70	2.65	2.65	-	-	7.00	1.6 ~ 9.0	1710	310 ~ 2800	8.1	7.6
	16+25+35	1.14	1.78	2.48	-	-	5.40	1.8 ~ 7.3	1210	390 ~ 2180	5.8	5.5	1.47	2.30	3.23	-	-	7.00	1.6 ~ 9.0	1690	340 ~ 2740	8.0	7.5
	16+25+42	1.04	1.63	2.73	-	-	5.40	1.8 ~ 7.3	1210	390 ~ 2180	5.8	5.5	1.35	2.11	3.54	-	-	7.00	1.6 ~ 9.0	1690	310 ~ 2730	8.0	7.5
	16+25+50	0.95	1.48	2.97	-	-	5.40	1.8 ~ 7.3	1140	420 ~ 1970	5.5	5.1	1.23	1.92	3.85	-	-	7.00	1.6 ~ 9.0	1590	340 ~ 2580	7.5	7.0
	16+35+35	1.00	2.20	2.20	-	-	5.40	1.8 ~ 7.3	1180	390 ~ 2140	5.7	5.3	1.30	2.85	2.85	-	-	7.00	1.6 ~ 9.0	1680	320 ~ 2710	7.9	7.4
	16+35+42	0.93	2.03	2.44	-	-	5.40	1.8 ~ 7.3	1180	390 ~ 2140	5.7	5.3	1.20	2.63	3.17	-	-	7.00	1.6 ~ 9.0	1670	320 ~ 2700	7.9	7.4
	20+20+20	1.80	1.80	1.80	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2140	5.8	5.5	2.33	2.33	2.33	-	-	6.99	1.6 ~ 9.0	1710	310 ~ 2790	8.1	7.6
	20+20+25	1.66	1.66	2.08	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2140	5.8	5.5	2.15	2.15	2.70	-	-	7.00	1.6 ~ 9.0	1710	310 ~ 2790	8.1	7.6
	20+20+35	1.44	1.44	2.52	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2100	5.8	5.5	1.87	1.87	3.26	-	-	7.00	1.6 ~ 9.0	1690	340 ~ 2730	8.0	7.5
	20+20+42	1.32	1.32	2.76	-	-	5.40	1.8 ~ 7.3	1180	390 ~ 2140	5.7	5.3	1.71	1.71	3.58	-	-	7.00	1.6 ~ 9.0	1680	320 ~ 2720	7.9	7.4
	20+20+50	1.20	1.20	3.00	-	-	5.40	1.8 ~ 7.3	1140	420 ~ 1970	5.5	5.1	1.56	1.56	3.88	-	-	7.00	1.6 ~ 9.0	1580	340 ~ 2570	7.5	7.0
	20+25+25	1.54	1.93	1.93	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2140	5.8	5.5	2.00	2.50	2.50	-	-	7.00	1.6 ~ 9.0	1710	310 ~ 2790	8.1	7.6
	20+25+35	1.35	1.69	2.36	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2100	5.8	5.5	1.75	2.19	3.06	-	-	7.00	1.6 ~ 9.0	1690	340 ~ 2730	8.0	7.5
	20+25+42	1.24	1.55	2.61	-	-	5.40	1.8 ~ 7.3	1180	390 ~ 2140	5.7	5.3	1.61	2.01	3.38	-	-	7.00	1.6 ~ 9.0	1680	320 ~ 2720	7.9	7.4
	20+25+50	1.14	1.42	2.84	-	-	5.40	1.8 ~ 7.3	1140	420 ~ 1970	5.5	5.1	1.47	1.84	3.69	-	-	7.00	1.6 ~ 9.0	1580	340 ~ 2570	7.5	7.0
	20+35+35	1.20	2.10	2.10	-	-	5.40	1.8 ~ 7.3	1180	390 ~ 2100	5.7	5.3	1.56	2.72	2.72	-	-	7.00	1.6 ~ 9.0	1670	320 ~ 2700	7.9	7.4
	25+25+25	1.80	1.80	1.80	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2140	5.8	5.5	2.33	2.33	2.33	-	-	6.99	1.6 ~ 9.0	1710	310 ~ 2790	8.1	7.6
	25+25+35	1.59	1.59	2.22	-	-	5.40	1.9 ~ 7.2	1210	390 ~ 2100	5.8	5.5	2.06	2.06	2.88	-	-	7.00	1.6 ~ 9.0	1690	310 ~ 2730	8.0	7.5
	25+25+42	1.47	1.47	2.46	-	-	5.40	1.8 ~ 7.3	1180	390 ~ 2140	5.7	5.3	1.90	1.90	3.20	-	-	7.00	1.6 ~ 9.0	1680	680 ~ 2720	7.9	7.4
25+35+35	1.42	1.99	1.99	-	-	5.40	1.8 ~ 7.3	1180	390 ~ 2100	5.7	5.3	1.84	2.58	2.58	-	-	7.00	1.6 ~ 9.0	1670	680 ~ 2700	7.9	7.4	

CU-4Z71WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity	COOLING OPERATION										HEATING OPERATION																
	Cooling Capacity [kW]					Input Power [W]					Heating Capacity [kW]					Input Power [W]											
	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	
20+20+20	2.00	2.00	2.00	-	-	6.00	1.9	8.0	1540	270	2470	7.4	6.7	2.83	2.83	2.83	-	-	8.49	3.3	10.4	2290	630	3040	10.8	9.9	
20+20+25	2.00	2.00	2.50	-	-	6.50	1.9	8.0	1790	270	2470	8.5	7.8	2.62	2.62	3.26	-	-	8.50	3.3	10.4	2290	630	3040	10.8	9.9	
20+20+35	1.89	1.89	3.32	-	-	7.10	1.9	8.0	2100	270	2380	9.9	9.1	2.27	2.27	3.96	-	-	8.50	3.3	10.4	2270	620	2970	10.7	9.8	
20+20+42	1.73	1.73	3.64	-	-	7.10	1.9	8.1	2060	290	2480	9.7	8.9	2.07	2.07	4.36	-	-	8.50	3.3	10.5	2260	620	3010	10.7	9.8	
20+20+50	1.58	1.58	3.94	-	-	7.10	2.0	8.5	1920	340	2440	9.1	8.3	1.89	1.89	4.72	-	-	8.50	3.2	10.7	2120	600	2950	10.0	9.2	
20+20+60	1.42	1.42	4.26	-	-	7.10	2.0	8.5	1920	340	2440	9.1	8.3	1.70	1.70	5.10	-	-	8.50	3.2	10.7	2120	600	2950	10.0	9.2	
20+25+25	2.00	2.50	2.50	-	-	7.00	1.9	8.0	2060	270	2470	9.7	8.9	2.42	3.04	3.04	-	-	8.50	3.3	10.4	2290	630	3040	10.8	9.9	
20+25+35	1.78	2.22	3.10	-	-	7.10	1.9	8.0	2100	270	2380	9.9	9.1	2.12	2.66	3.72	-	-	8.50	3.3	10.4	2270	620	2970	10.7	9.8	
20+25+42	1.63	2.04	3.43	-	-	7.10	1.9	8.1	2060	290	2480	9.7	8.9	1.95	2.44	4.11	-	-	8.50	3.3	10.5	2260	620	3010	10.7	9.8	
20+25+50	1.49	1.87	3.74	-	-	7.10	2.0	8.5	1920	340	2440	9.1	8.3	1.79	2.24	4.47	-	-	8.50	3.2	10.7	2120	600	2950	10.0	9.2	
20+25+60	1.35	1.69	4.06	-	-	7.10	2.0	8.5	1920	340	2440	9.1	8.3	1.62	2.02	4.86	-	-	8.50	3.2	10.7	2120	600	2950	10.0	9.2	
20+35+35	1.58	2.76	2.76	-	-	7.10	1.9	8.1	2060	290	2390	9.7	8.9	1.88	3.31	3.31	-	-	8.50	3.3	10.5	2240	640	2990	10.6	9.7	
20+35+42	1.46	2.56	3.08	-	-	7.10	1.9	8.2	2010	290	2480	9.5	8.7	1.75	3.07	3.68	-	-	8.50	3.3	10.5	2230	640	2980	10.5	9.7	
20+35+50	1.35	2.37	3.38	-	-	7.10	2.0	8.5	1870	340	2390	8.8	8.1	1.62	2.83	4.05	-	-	8.50	3.2	10.7	2100	600	2920	9.9	9.1	
20+35+60	1.23	2.16	3.71	-	-	7.10	2.0	8.5	1870	340	2390	8.8	8.1	1.48	2.59	4.43	-	-	8.50	3.2	10.7	2100	600	2920	9.9	9.1	
20+42+42	1.36	2.87	2.87	-	-	7.10	1.9	8.2	2010	290	2430	9.5	8.7	1.64	3.43	3.43	-	-	8.50	3.3	10.5	2220	630	2980	10.5	9.6	
20+42+50	1.27	2.66	3.17	-	-	7.10	2.0	8.5	1870	340	2390	8.8	8.1	1.52	3.19	3.79	-	-	8.50	3.2	10.5	2090	620	2870	9.9	9.1	
25+25+25	2.36	2.36	2.36	-	-	7.08	1.9	8.0	2100	270	2470	9.9	9.1	2.83	2.83	2.83	-	-	8.49	3.3	10.4	2290	630	3040	10.8	9.9	
25+25+35	2.09	2.09	2.92	-	-	7.10	1.9	8.0	2100	270	2380	9.9	9.1	2.50	2.50	3.50	-	-	8.50	3.3	10.4	2270	620	2970	10.7	9.8	
25+25+42	1.93	1.93	3.24	-	-	7.10	1.9	8.1	2060	290	2480	9.7	8.9	2.31	2.31	3.88	-	-	8.50	3.3	10.5	2260	620	3010	10.7	9.8	
25+25+50	1.78	1.78	3.54	-	-	7.10	2.0	8.5	1920	340	2440	9.1	8.3	2.13	2.13	4.24	-	-	8.50	3.2	10.7	2120	600	2950	10.0	9.2	
25+25+60	1.61	1.61	3.88	-	-	7.10	2.0	8.5	1920	340	2440	9.1	8.3	1.93	1.93	4.64	-	-	8.50	3.2	10.7	2120	600	2950	10.0	9.2	
25+35+35	1.86	2.62	2.62	-	-	7.10	1.9	8.1	2060	290	2390	9.7	8.9	2.24	3.13	3.13	-	-	8.50	3.3	10.5	2240	640	2990	10.6	9.7	
25+35+42	1.74	2.44	2.92	-	-	7.10	1.9	8.2	2010	290	2480	9.5	8.7	2.08	2.92	3.50	-	-	8.50	3.3	10.5	2230	640	2980	10.5	9.7	
25+35+50	1.61	2.26	3.23	-	-	7.10	2.0	8.5	1870	340	2390	8.8	8.1	1.93	2.70	3.87	-	-	8.50	3.2	10.7	2100	600	2920	9.9	9.1	
25+42+42	1.62	2.74	2.74	-	-	7.10	1.9	8.2	2010	290	2430	9.5	8.7	1.94	3.28	3.28	-	-	8.50	3.3	10.5	2220	630	2980	10.5	9.6	
35+35+35	2.36	2.36	2.36	-	-	7.08	1.9	8.0	2100	270	2470	9.9	9.1	2.83	2.83	2.83	-	-	8.49	3.3	10.5	2180	630	2970	10.3	9.5	
35+35+42	2.22	2.22	2.66	-	-	7.10	1.9	8.2	2010	290	2390	9.5	8.7	2.66	2.66	3.18	-	-	8.50	3.3	10.5	2170	630	2920	10.3	9.4	
16+16+16+16	1.60	1.60	1.60	1.60	-	6.40	1.9	8.7	1390	340	2370	6.6	6.2	2.12	2.12	2.12	-	-	8.48	3.0	10.7	1960	500	2770	9.3	8.7	
16+16+16+20	1.67	1.67	1.67	2.09	-	7.10	1.9	8.8	1660	340	2470	7.9	7.4	2.00	2.00	2.50	-	-	8.50	3.0	10.7	1950	500	2720	9.2	8.6	
16+16+16+25	1.56	1.56	1.56	2.42	-	7.10	1.9	8.8	1660	340	2470	7.9	7.4	1.86	1.86	1.86	2.92	-	-	8.50	3.0	10.7	1950	500	2720	9.2	8.6
16+16+16+35	1.37	1.37	1.37	2.99	-	7.10	1.9	8.8	1660	340	2380	7.9	7.4	1.64	1.64	1.64	3.58	-	-	8.50	3.0	10.7	1930	500	2700	9.1	8.5
16+16+16+42	1.26	1.26	1.26	3.32	-	7.10	1.9	8.8	1660	340	2380	7.9	7.4	1.51	1.51	1.51	3.97	-	-	8.50	3.0	10.7	1930	500	2690	9.1	8.5
16+16+16+50	1.16	1.16	1.16	3.62	-	7.10	1.9	8.8	1580	400	2240	7.5	7.1	1.39	1.39	1.39	4.33	-	-	8.50	3.0	10.7	1890	560	2590	8.9	8.4
16+16+16+60	1.05	1.05	1.05	3.95	-	7.10	1.9	8.8	1580	400	2240	7.5	7.1	1.26	1.26	1.26	4.72	-	-	8.50	3.0	10.7	1890	560	2590	8.9	8.4
16+16+20+20	1.58	1.58	1.97	1.97	-	7.10	1.9	8.8	1660	340	2420	7.9	7.4	1.89	1.89	2.36	2.36	-	-	8.50	3.1	10.7	1950	520	2710	9.2	8.6
16+16+20+25	1.48	1.48	1.84	2.30	-	7.10	1.9	8.8	1660	340	2420	7.9	7.4	1.77	1.77	2.20	2.76	-	-	8.50	3.1	10.7	1950	520	2710	9.2	8.6
16+16+20+35	1.31	1.31	1.63	2.85	-	7.10	1.9	8.8	1660	340	2380	7.9	7.4	1.56	1.56	1.95	3.43	-	-	8.50	3.0	10.7	1930	500	2690	9.1	8.5
16+16+20+42	1.21	1.21	1.51	3.17	-	7.10	1.9	8.8	1620	370	2380	7.7	7.2	1.45	1.45	1.80	3.80	-	-	8.50	3.0	10.7	1920	520	2680	9.1	8.5
16+16+20+50	1.11	1.11	1.39	3.49	-	7.10	1.9	8.8	1580	400	2200	7.5	7.1	1.33	1.33	1.67	4.17	-	-	8.50	3.0	10.7	1880	570	2580	8.9	8.3
16+16+20+60	1.01	1.01	1.27	3.81	-	7.10	1.9	8.8	1580	400	2200	7.5	7.1	1.21	1.21	1.52	4.56	-	-	8.50	3.0	10.7	1880	570	2580	8.9	8.3
16+16+25+25	1.39	1.39	2.16	2.16	-	7.10	1.9	8.8	1660	340	2420	7.9	7.4	1.66	1.66	2.59	2.59	-	-	8.50	3.1	10.7	1950	520	2710	9.2	8.6
16+16+25+35	1.23	1.23	1.93	2.71	-	7.10	1.9	8.8	1660	340	2380	7.9	7.4	1.48	1.48	2.31	3.23	-	-	8.50	3.0	10.7	1930	500	2690	9.1	8.5
16+16+25+42	1.15	1.15	1.79	3.01	-	7.10	1.9	8.8	1620	370	2380	7.7	7.2	1.37	1.37	2.15	3.61	-	-	8.50	3.0	10.7	1920	520	2680	9.1	8.5
16+16+25+50	1.06	1.06	1.66	3.32	-	7.10	1.9	8.8	1580	400	2200	7.5	7.1	1.27	1.27	1.99	3.97	-	-	8.50	3.0	10.7	1880	570	2580	8.9	8.3
16+16+35+35	1.11	1.11	2.44	2.44	-	7.10	1.9	8.8	1620	370	2330	7.7	7.2	1.33	1.33	2.92	2.92	-	-	8.50	3.0	10.7	1910	530	2660	9.0	8.4
16+16+35+42	1.04	1.04	2.28	2.74	-	7.10	1.9	8.8	1620	370	2330	7.7	7.2	1.25	1.25	2.72	3.28	-	-	8.50	3.0	10.7	1900	530	2650	9.0	8.4
16+20+20+20	1.49	1.87	1.87	1.87	-	7.10	1.9	8.8	1660	340	2420	7.9	7.4	1.78	2.24	2.24	2.24	-	-	8.50	3.1	10.7	1940	520	2700	9.2	8.6
16+20+20+25	1.40	1.75	1.75	2.20	-	7.10	1.9	8.8	1660	340	2420	7.9	7.4	1.68	2.10	2.10	2.62	-	-	8.50	3.1	10.7	1940	520	2700	9.2	8.6
16+20+20+35	1.25	1.56	1.56	2.73	-	7.10	1.9	8.8	1620	370	2380	7.7	7.2	1.49	1.87	1.87	3.27	-	-	8.50	3.0	10.7	1920	520	2680	9.1	8.5
16+20+20+42	1.16	1.45	1.45	3.04	-	7.10	1.9	8.8	1620	370	2380	7.7	7.2	1.39	1.73	1.73	3.65	-	-	8.50	3.0	10.7	1910	520	2670	9.0	

CU-4Z71WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION										HEATING OPERATION											
	Cooling Capacity [kW]					Input Power [W]		Current [A]		Heating Capacity [kW]					Input Power [W]		Current [A]					
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
16+16+16	1.60	1.60	1.60	-	-	4.80	1.9 ~ 8.0	1140	270 ~ 2650	5.5	5.0	2.60	2.60	2.60	-	-	7.80	3.3 ~ 10.4	2260	640 ~ 3250	10.7	9.8
16+16+20	1.60	1.60	2.00	-	-	5.20	1.9 ~ 8.0	1280	270 ~ 2610	6.1	5.6	2.58	2.58	3.24	-	-	8.40	3.3 ~ 10.4	2490	640 ~ 3240	11.8	10.8
16+16+25	1.60	1.60	2.50	-	-	5.70	1.9 ~ 8.0	1510	270 ~ 2610	7.2	6.6	2.39	2.39	3.72	-	-	8.50	3.3 ~ 10.4	2530	640 ~ 3240	12.0	11.0
16+16+35	1.60	1.60	3.50	-	-	6.70	1.9 ~ 8.0	1970	270 ~ 2520	9.3	8.5	2.03	2.03	4.44	-	-	8.50	3.3 ~ 10.4	2460	630 ~ 3220	11.6	10.7
16+16+42	1.54	1.54	4.02	-	-	7.10	1.9 ~ 8.1	2190	270 ~ 2610	10.4	9.5	1.84	1.84	4.82	-	-	8.50	3.3 ~ 10.5	2450	620 ~ 3250	11.6	10.6
16+16+50	1.39	1.39	4.32	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.66	1.66	5.18	-	-	8.50	3.2 ~ 10.7	2320	600 ~ 3150	11.0	10.1
16+16+60	1.23	1.23	4.64	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.48	1.48	5.54	-	-	8.50	3.2 ~ 10.7	2320	600 ~ 3150	11.0	10.1
16+20+20	1.60	2.00	2.00	-	-	5.60	1.9 ~ 8.0	1430	270 ~ 2610	6.8	6.3	2.42	3.04	3.04	-	-	8.50	3.3 ~ 10.4	2520	630 ~ 3230	11.9	10.9
16+20+25	1.60	2.00	2.50	-	-	6.10	1.9 ~ 8.0	1670	270 ~ 2610	8.0	7.3	2.23	2.79	3.48	-	-	8.50	3.3 ~ 10.4	2520	630 ~ 3230	11.9	10.9
16+20+35	1.60	2.00	3.50	-	-	7.10	1.9 ~ 8.0	2190	270 ~ 2520	10.4	9.5	1.92	2.39	4.19	-	-	8.50	3.3 ~ 10.4	2450	620 ~ 3160	11.6	10.6
16+20+42	1.46	1.82	3.82	-	-	7.10	1.9 ~ 8.1	2190	270 ~ 2570	10.4	9.5	1.74	2.18	4.58	-	-	8.50	3.3 ~ 10.4	2460	620 ~ 3200	11.6	10.6
16+20+50	1.32	1.65	4.13	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.58	1.98	4.94	-	-	8.50	3.2 ~ 10.7	2310	600 ~ 3140	10.9	10.0
16+20+60	1.18	1.48	4.44	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.42	1.77	5.31	-	-	8.50	3.2 ~ 10.7	2310	600 ~ 3140	10.9	10.0
16+25+25	1.60	2.50	2.50	-	-	6.60	1.9 ~ 8.0	1920	270 ~ 2610	9.1	8.3	2.06	3.22	3.22	-	-	8.50	3.3 ~ 10.4	2520	630 ~ 3230	11.9	10.9
16+25+35	1.49	2.34	3.27	-	-	7.10	1.9 ~ 8.0	2190	270 ~ 2520	10.4	9.5	1.79	2.80	3.91	-	-	8.50	3.3 ~ 10.4	2450	620 ~ 3160	11.6	10.6
16+25+42	1.37	2.14	3.59	-	-	7.10	1.9 ~ 8.1	2190	270 ~ 2570	10.4	9.5	1.64	2.56	4.30	-	-	8.50	3.3 ~ 10.5	2450	620 ~ 3200	11.6	10.6
16+25+50	1.25	1.95	3.90	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.49	2.34	4.67	-	-	8.50	3.2 ~ 10.7	2310	600 ~ 3140	10.9	10.0
16+25+60	1.12	1.76	4.22	-	-	7.10	2.0 ~ 8.5	2010	320 ~ 2570	9.5	8.7	1.35	2.10	5.05	-	-	8.50	3.2 ~ 10.7	2310	600 ~ 3140	10.9	10.0
16+35+35	1.32	2.89	2.89	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2520	10.2	9.3	1.58	3.46	3.46	-	-	8.50	3.3 ~ 10.5	2430	640 ~ 3180	11.5	10.5
16+35+42	1.22	2.67	3.21	-	-	7.10	1.9 ~ 8.2	2150	290 ~ 2570	10.2	9.3	1.46	3.20	3.84	-	-	8.50	3.3 ~ 10.5	2420	640 ~ 3170	11.4	10.5
16+35+50	1.12	2.46	3.52	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2530	9.3	8.5	1.34	2.95	4.21	-	-	8.50	3.2 ~ 10.7	2290	600 ~ 3110	10.8	9.9
16+35+60	1.02	2.24	3.84	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2530	9.3	8.5	1.23	2.68	4.59	-	-	8.50	3.2 ~ 10.7	2290	600 ~ 3110	10.8	9.9
16+42+42	1.14	2.98	2.98	-	-	7.10	1.9 ~ 8.2	2150	290 ~ 2570	10.2	9.3	1.36	3.57	3.57	-	-	8.50	3.3 ~ 10.5	2410	640 ~ 3160	11.4	10.4
16+42+50	1.05	2.76	3.29	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2480	9.3	8.5	1.25	3.31	3.94	-	-	8.50	3.2 ~ 10.6	2280	600 ~ 3060	10.8	9.9
20+20+20	2.00	2.00	2.00	-	-	6.00	1.9 ~ 8.0	1630	270 ~ 2560	7.8	7.1	2.83	2.83	2.83	-	-	8.49	3.3 ~ 10.4	2470	630 ~ 3220	11.7	10.7
20+20+25	2.00	2.00	2.50	-	-	6.50	1.9 ~ 8.0	1880	270 ~ 2560	8.9	8.1	2.62	2.62	3.26	-	-	8.50	3.3 ~ 10.4	2470	630 ~ 3220	11.7	10.7
20+20+35	1.89	1.89	3.32	-	-	7.10	1.9 ~ 8.0	2190	270 ~ 2470	10.4	9.5	2.27	2.27	3.96	-	-	8.50	3.3 ~ 10.4	2450	620 ~ 3150	11.6	10.6
20+20+42	1.73	1.73	3.64	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2570	10.2	9.3	2.07	2.07	4.36	-	-	8.50	3.3 ~ 10.5	2440	620 ~ 3190	11.5	10.6
20+20+50	1.58	1.58	3.94	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	1.89	1.89	4.72	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0
20+20+60	1.42	1.42	4.26	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	1.70	1.70	5.10	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0
20+25+25	2.00	2.50	2.50	-	-	7.00	1.9 ~ 8.0	2150	270 ~ 2560	10.2	9.3	2.42	3.04	3.04	-	-	8.50	3.3 ~ 10.4	2470	630 ~ 3220	11.7	10.7
20+25+35	1.78	2.22	3.10	-	-	7.10	1.9 ~ 8.0	2190	270 ~ 2470	10.4	9.5	2.12	2.66	3.72	-	-	8.50	3.3 ~ 10.4	2450	620 ~ 3150	11.6	10.6
20+25+42	1.63	2.04	3.43	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2570	10.2	9.3	1.95	2.44	4.11	-	-	8.50	3.3 ~ 10.5	2440	620 ~ 3190	11.5	10.6
20+25+50	1.49	1.87	3.74	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	1.79	2.24	4.47	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0
20+25+60	1.35	1.69	4.06	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	1.62	2.02	4.86	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0
20+35+35	1.58	2.76	2.76	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2480	10.2	9.3	1.88	3.31	3.31	-	-	8.50	3.3 ~ 10.5	2420	640 ~ 3170	11.4	10.5
20+35+42	1.46	2.56	3.08	-	-	7.10	1.9 ~ 8.2	2100	290 ~ 2570	9.9	9.1	1.75	3.07	3.68	-	-	8.50	3.3 ~ 10.5	2410	640 ~ 3160	11.4	10.4
20+35+50	1.35	2.37	3.38	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2480	9.3	8.5	1.62	2.83	4.05	-	-	8.50	3.2 ~ 10.7	2280	600 ~ 3100	10.8	9.9
20+35+60	1.23	2.16	3.71	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2480	9.3	8.5	1.48	2.59	4.43	-	-	8.50	3.2 ~ 10.7	2280	600 ~ 3100	10.8	9.9
20+42+42	1.36	2.87	2.87	-	-	7.10	1.9 ~ 8.2	2100	290 ~ 2520	9.9	9.1	1.64	3.43	3.43	-	-	8.50	3.3 ~ 10.5	2400	630 ~ 3160	11.3	10.4
20+42+50	1.27	2.66	3.17	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2480	9.3	8.5	1.52	3.19	3.79	-	-	8.50	3.2 ~ 10.6	2270	620 ~ 3050	10.7	9.8
25+25+25	2.36	2.36	2.36	-	-	7.08	1.9 ~ 8.0	2190	270 ~ 2560	10.4	9.5	2.83	2.83	2.83	-	-	8.49	3.3 ~ 10.4	2470	630 ~ 3220	11.7	10.7
25+25+35	2.09	2.09	2.92	-	-	7.10	1.9 ~ 8.0	2190	270 ~ 2470	10.4	9.5	2.50	2.50	3.50	-	-	8.50	3.3 ~ 10.4	2450	620 ~ 3150	11.6	10.6
25+25+42	1.93	1.93	3.24	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2570	10.2	9.3	2.31	2.31	3.88	-	-	8.50	3.3 ~ 10.5	2440	620 ~ 3190	11.5	10.6
25+25+50	1.78	1.78	3.54	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	2.13	2.13	4.24	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0
25+25+60	1.61	1.61	3.88	-	-	7.10	2.0 ~ 8.5	2010	340 ~ 2530	9.5	8.7	1.93	1.93	4.64	-	-	8.50	3.2 ~ 10.7	2300	600 ~ 3130	10.9	10.0
25+35+35	1.86	2.62	2.62	-	-	7.10	1.9 ~ 8.1	2150	290 ~ 2480	10.2	9.3	2.24	3.13	3.13	-	-	8.50	3.3 ~ 10.5	2420	640 ~ 3170	11.4	10.5
25+35+42	1.74	2.44	2.92	-	-	7.10	1.9 ~ 8.2	2100	290 ~ 2570	9.9	9.1	2.08	2.92	3.50	-	-	8.50	3.3 ~ 10.5	2410	640 ~ 3160	11.4	10.4
25+35+50	1.61	2.26	3.23	-	-	7.10	2.0 ~ 8.5	1960	340 ~ 2480	9.3	8.5	1.93	2.70	3.87	-	-	8.50	3.2 ~ 10.7	2280	600 ~ 3100	10.8	9.9
25+42+42	1.62	2.74	2.74	-	-	7.10	1.9 ~ 8.2	2100	290 ~ 2520	9.9	9.1	1.94	3.28	3.28	-	-	8.50	3.3 ~ 10.5	2400	630 ~ 3160	11.3	10.4
35+35+35	2.36	2.36	2.36	-	-	7.08	1.9 ~ 8.2	2100	290 ~ 2480	9.9	9.1	2.83	2.83	2.83	-	-	8.49	3.3 ~ 10.5	2360	630 ~ 3150	11.2	10.2
35+35+42	2.22	2.22	2.66	-	-	7.10	1.9 ~ 8.2	2100	290 ~ 2480	9.9	9.1	2.66	2.66	3.18	-	-	8.50	3.3 ~ 10.5	2350	630 ~ 3100	11.1	10.2

• Specification based on JIS C 9612 standard.
• A minimum of 2 indoor units must be connected.

CU-4Z71WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION										HEATING OPERATION										
	Cooling Capacity [kW]					Input Power [W]		Current [A]		Heating Capacity [kW]					Input Power [W]		Current [A]				
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V
16+16+16+16	1.60	1.60	1.60	1.60	-	6.40	1.9 ~ 8.7	15													

CU-4Z80WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity	COOLING OPERATION										HEATING OPERATION																			
	Cooling Capacity [kW]					Input Power [W]					Current [A]					Heating Capacity [kW]					Input Power [W]					Current [A]				
	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V				
1 Room	16	1.60	-	-	-	1.60	1.3	2.3	420	250	~	660	2.2	2.0	2.60	-	-	-	-	2.60	1.2	~	3.2	640	290	~	1000	3.3	3.0	
	20	2.00	-	-	-	2.00	1.8	~	2.9	520	340	~	830	2.7	2.5	3.20	-	-	-	-	3.20	1.2	~	4.1	780	290	~	1270	4.0	3.7
	25	2.50	-	-	-	2.50	1.8	~	2.9	650	340	~	830	3.4	3.1	3.60	-	-	-	-	3.60	1.2	~	4.3	980	290	~	1270	5.1	4.7
	35	3.50	-	-	-	3.50	1.8	~	4.1	960	340	~	1380	4.8	4.4	4.50	-	-	-	-	4.50	1.2	~	5.8	1270	290	~	2140	6.5	5.9
	42	4.20	-	-	-	4.20	1.8	~	4.5	1390	340	~	2010	6.8	6.2	5.60	-	-	-	-	5.60	1.2	~	6.8	1760	290	~	2970	8.5	7.8
	50	5.00	-	-	-	5.00	1.9	~	5.4	1630	340	~	2150	7.9	7.3	6.80	-	-	-	-	6.80	1.2	~	6.9	2350	290	~	2840	11.3	10.4
	60	6.00	-	-	-	6.00	1.9	~	6.2	2050	340	~	2350	9.7	8.9	8.50	-	-	-	-	8.50	1.3	~	9.0	2440	320	~	2590	11.8	10.8
	71	7.10	-	-	-	7.10	2.0	~	7.2	2550	370	~	2790	12.1	11.1	8.70	-	-	-	-	8.70	1.4	~	9.2	2590	380	~	2760	12.5	11.4
	16+16	1.60	1.60	-	-	3.20	2.3	~	5.8	770	350	~	2030	4.1	3.7	2.60	2.60	-	-	-	5.20	2.2	~	8.2	1640	430	~	2920	8.1	7.5
	16+20	1.60	2.00	-	-	3.60	2.3	~	5.8	910	340	~	2030	4.7	4.3	2.58	3.22	-	-	-	5.80	2.2	~	8.2	1760	430	~	2910	8.6	7.9
	16+25	1.60	2.50	-	-	4.10	2.3	~	5.8	1110	340	~	2030	5.7	5.2	2.42	3.78	-	-	-	6.20	2.2	~	8.2	1900	430	~	2910	9.3	8.6
	16+35	1.60	3.50	-	-	5.10	2.3	~	5.8	1520	340	~	1960	7.7	7.0	2.23	4.87	-	-	-	7.10	2.2	~	8.6	2070	380	~	2990	10.2	9.3
	16+42	1.60	4.20	-	-	5.80	2.3	~	6.7	1860	340	~	2520	9.3	8.5	2.26	5.94	-	-	-	8.20	2.2	~	9.8	2450	370	~	3520	12.0	11.0
	16+50	1.60	5.00	-	-	6.60	2.3	~	7.2	2100	320	~	2520	10.5	9.6	2.28	7.12	-	-	-	9.40	2.2	~	10.0	2540	330	~	3330	12.5	11.4
	16+60	1.60	6.00	-	-	7.60	2.3	~	8.5	2730	320	~	3530	13.7	12.5	1.98	7.42	-	-	-	9.40	2.2	~	10.0	2540	330	~	3330	12.5	11.4
	16+71	1.47	6.53	-	-	8.00	2.3	~	8.5	2880	320	~	3380	14.4	13.2	1.73	7.67	-	-	-	9.40	2.2	~	10.3	2480	320	~	3500	12.2	11.2
	20+20	2.00	2.00	-	-	4.00	2.3	~	5.8	1050	340	~	1970	5.4	4.9	3.20	3.20	-	-	-	6.40	2.2	~	8.2	1940	390	~	2900	9.5	8.7
	20+25	2.00	2.50	-	-	4.50	2.3	~	5.8	1280	340	~	1970	6.5	5.9	3.02	3.78	-	-	-	6.80	2.2	~	8.2	2000	390	~	2900	9.8	9.0
	20+35	2.00	3.50	-	-	5.50	2.3	~	5.8	1690	340	~	1900	8.5	7.8	2.80	4.90	-	-	-	7.70	2.2	~	8.6	2250	370	~	2930	11.1	10.1
	20+42	2.00	4.20	-	-	6.20	2.3	~	7.2	2110	340	~	2940	10.6	9.7	2.84	5.96	-	-	-	8.80	2.2	~	10.0	2500	370	~	3630	12.3	11.3
	20+50	2.00	5.00	-	-	7.00	2.3	~	8.1	2250	320	~	3140	11.3	10.3	2.69	6.71	-	-	-	9.40	2.2	~	10.0	2530	320	~	3310	12.4	11.4
	20+60	2.00	6.00	-	-	8.00	2.3	~	8.5	2950	320	~	3530	14.8	13.5	2.35	7.05	-	-	-	9.40	2.2	~	10.0	2530	320	~	3310	12.4	11.4
	20+71	1.76	6.24	-	-	8.00	2.3	~	8.5	2810	350	~	3380	14.1	12.9	2.07	7.33	-	-	-	9.40	2.2	~	10.3	2470	320	~	3480	12.1	11.1
	25+25	2.50	2.50	-	-	5.00	2.3	~	5.8	1470	340	~	1970	7.4	6.8	3.60	3.60	-	-	-	7.20	2.2	~	8.6	2130	390	~	3010	10.5	9.6
	25+35	2.50	3.50	-	-	6.00	2.3	~	6.7	1980	340	~	2520	9.9	9.1	3.37	4.73	-	-	-	8.10	2.2	~	9.8	2400	370	~	3520	11.8	10.8
	25+42	2.50	4.20	-	-	6.70	2.3	~	7.2	2450	340	~	2940	12.3	11.2	3.43	5.77	-	-	-	9.20	2.2	~	10.0	2650	370	~	3630	13.0	11.9
	25+50	2.50	5.00	-	-	7.50	2.3	~	8.5	2590	320	~	3530	13.0	11.9	3.13	6.27	-	-	-	9.40	2.2	~	10.0	2530	320	~	3310	12.4	11.4
	25+60	2.35	5.65	-	-	8.00	2.3	~	8.5	2950	320	~	3530	14.8	13.5	2.76	6.64	-	-	-	9.40	2.2	~	10.0	2530	320	~	3310	12.4	11.4
	25+71	2.08	5.92	-	-	8.00	2.3	~	8.5	2810	350	~	3380	14.1	12.9	2.45	6.95	-	-	-	9.40	2.2	~	10.3	2470	320	~	3480	12.1	11.1
	35+35	3.50	3.50	-	-	7.00	2.3	~	8.1	2590	330	~	3670	13.0	11.9	4.50	4.50	-	-	-	9.00	2.2	~	10.0	2530	360	~	3550	12.4	11.4
	35+42	3.50	4.20	-	-	7.70	2.3	~	8.5	3080	330	~	4160	15.4	14.1	4.27	5.13	-	-	-	9.40	2.2	~	10.0	2670	350	~	3540	13.1	12.0
	35+50	3.29	4.71	-	-	8.00	2.3	~	8.5	2810	320	~	3380	14.1	12.9	3.87	5.53	-	-	-	9.40	2.2	~	10.0	2460	320	~	3280	12.1	11.1
	35+60	2.95	5.05	-	-	8.00	2.3	~	8.5	2810	320	~	3380	14.1	12.9	3.46	5.94	-	-	-	9.40	2.2	~	10.3	2460	320	~	3400	12.1	11.1
	35+71	2.64	5.36	-	-	8.00	2.3	~	8.6	2740	350	~	3380	13.7	12.6	3.10	6.30	-	-	-	9.40	2.2	~	10.5	2440	310	~	3510	12.0	11.0
	42+42	4.00	4.00	-	-	8.00	2.3	~	8.5	3380	330	~	4080	16.9	15.5	4.70	4.70	-	-	-	9.40	2.2	~	10.0	2660	350	~	3530	13.1	12.0
	42+50	3.65	4.35	-	-	8.00	2.3	~	8.5	2810	320	~	3380	14.1	12.9	4.29	5.11	-	-	-	9.40	2.2	~	10.3	2440	320	~	3390	12.0	11.0
	42+60	3.29	4.71	-	-	8.00	2.3	~	8.6	2810	320	~	3460	14.1	12.9	3.87	5.53	-	-	-	9.40	2.2	~	10.3	2440	320	~	3390	12.0	11.0
	42+71	2.97	5.03	-	-	8.00	2.3	~	8.6	2740	350	~	3300	13.7	12.6	3.49	5.91	-	-	-	9.40	2.2	~	10.5	2430	310	~	3500	11.9	10.9
	50+50	4.00	4.00	-	-	8.00	2.3	~	8.6	2460	340	~	2990	12.3	11.3	4.70	4.70	-	-	-	9.40	2.2	~	10.3	2280	310	~	3170	11.2	10.3
	50+60	3.64	4.36	-	-	8.00	2.3	~	8.6	2460	340	~	2990	12.3	11.3	4.27	5.13	-	-	-	9.40	2.2	~	10.5	2280	310	~	3230	11.2	10.3
	50+71	3.31	4.69	-	-	8.00	2.3	~	8.6	2390	340	~	2920	12.0	11.0	3.88	5.52	-	-	-	9.40	2.2	~	10.5	2260	310	~	3210	11.1	10.2
	60+60	4.00	4.00	-	-	8.00	2.3	~	8.6	2460	340	~	2990	12.3	11.3	4.70	4.70	-	-	-	9.40	2.2	~	10.5	2280	310	~	3230	11.2	10.3
	60+71	3.66	4.34	-	-	8.00	2.3	~	8.6	2390	340	~	2920	12.0	11.0	4.31	5.09	-	-	-	9.40	2.2	~	10.5	2260	310	~	3210	11.1	10.2
	71+71	4.00	4.00	-	-	8.00	2.3	~	8.6	2320	380	~	2840	11.6	10.6	4.70	4.70	-	-	-	9.40	2.2	~	10.5	2250	320	~	3200	11.1	10.1
	16+16+16	1.60	1.60	1.60	-	-	4.80	2.3	~	8.5	1140	350	~	3170	5.8	5.3	2.60	2.60	2.60	7.80	3.0	~	10.4	2000	440	~	3460	9.8	9.0	
	16+16+20	1.60	1.60	2.00	-	-	5.20	2.3	~	8.5	1240	350	~	3170	6.3	5.7	2.58	2.58	3.24	8.40	3.0	~	10.4	2230	440	~	3380	11.0	10.0	
	16+16+25	1.60	1.60	2.50	-	-	5.70	2.3	~	8.5	1450	350	~	3170	7.3	6.7	2.47	2.47	3.86	8.80	3.0	~	10.4	2210	440	~	3380	10.9	10.0	
	16+16+35	1.60	1.60	3.50	-	-	6.70	2.3	~	8.5	1770	340	~	3090	8.9	8.1	2.24	2.24	4.92	9.40	3.0	~	10.4	2370	440	~	3350	11.6	10.7	
	16+16+42	1.60	1.60	4.20	-	-	7.40	2.3	~	8.5	2130	340	~	3010	10.7	9.8	2.03	2.03	5.34	9.40	3.0	~	10.4	2360	430	~	3330	11.6	10.6	
	16+16+50	1.56	1.56	4.88	-	-	8.00	2.3	~	8.6	2160	380	~	2790	10.8	9.9	1.83	1.83	5.74	9										

CU-4Z80WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity	COOLING OPERATION										HEATING OPERATION																			
	Cooling Capacity [kW]					Input Power [W]					Current [A]					Heating Capacity [kW]					Input Power [W]					Current [A]				
	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V				
25+42+60	1.57	2.65	3.78	-	-	8.00	2.3	9.0	2100	380	2930	10.5	9.6	1.85	3.11	4.44	-	-	9.40	3.0	10.6	2200	490	3170	10.8	9.9				
25+42+71	1.45	2.43	4.12	-	-	8.00	2.3	9.0	2040	380	2860	10.2	9.4	1.70	2.86	4.84	-	-	9.40	3.0	10.6	2190	490	3150	10.8	9.9				
25+50+50	1.60	3.20	3.20	-	-	8.00	2.3	9.0	1980	430	2710	9.9	9.1	1.88	3.76	3.76	-	-	9.40	3.0	10.6	2110	550	3040	10.4	9.5				
25+50+60	1.48	2.96	3.56	-	-	8.00	2.3	9.0	1980	430	2710	9.9	9.1	1.74	3.48	4.18	-	-	9.40	3.0	10.6	2110	550	3040	10.4	9.5				
25+50+71	1.37	2.74	3.89	-	-	8.00	2.3	9.0	1980	470	2710	9.9	9.1	1.61	3.22	4.57	-	-	9.40	3.0	10.6	2100	580	3030	10.3	9.5				
25+60+60	1.38	3.31	3.31	-	-	8.00	2.3	9.0	1980	430	2710	9.9	9.1	1.62	3.89	3.89	-	-	9.40	3.0	10.6	2110	550	3040	10.4	9.5				
35+35+35	2.66	2.66	2.66	-	-	7.98	2.3	8.8	2230	340	3090	11.2	10.2	3.13	3.13	3.13	-	-	9.39	3.0	10.5	2300	460	3250	11.3	10.4				
35+35+42	2.50	2.50	3.00	-	-	8.00	2.3	8.8	2230	340	3090	11.2	10.2	2.94	2.94	3.52	-	-	9.40	3.0	10.6	2290	460	3290	11.3	10.3				
35+35+50	2.33	2.33	3.33	-	-	7.99	2.3	9.0	2040	380	2930	10.2	9.4	2.74	2.74	3.92	-	-	9.40	3.0	10.6	2180	490	3150	10.7	9.8				
35+35+60	2.15	2.15	3.70	-	-	8.00	2.3	9.0	2040	380	2930	10.2	9.4	2.53	2.53	4.34	-	-	9.40	3.0	10.6	2180	490	3150	10.7	9.8				
35+35+71	1.99	1.99	4.02	-	-	8.00	2.3	9.0	2040	430	2860	10.2	9.4	2.33	2.33	4.74	-	-	9.40	3.0	10.6	2170	500	3130	10.7	9.8				
35+42+42	2.36	2.82	2.82	-	-	8.00	2.3	9.0	2230	340	3160	11.2	10.2	2.76	3.32	3.32	-	-	9.40	3.0	10.6	2280	460	3280	11.2	10.3				
35+42+50	2.20	2.65	3.15	-	-	8.00	2.3	9.0	2040	380	2860	10.2	9.4	2.59	3.11	3.70	-	-	9.40	3.0	10.6	2170	500	3140	10.7	9.8				
35+42+60	2.04	2.45	3.51	-	-	8.00	2.3	9.0	2040	380	2860	10.2	9.4	2.40	2.88	4.12	-	-	9.40	3.0	10.6	2170	500	3140	10.7	9.8				
35+50+50	2.08	2.96	2.96	-	-	8.00	2.3	9.0	1980	470	2710	9.9	9.1	2.44	3.48	3.48	-	-	9.40	3.0	10.6	2090	580	3010	10.3	9.4				
35+50+60	1.93	2.76	3.31	-	-	8.00	2.3	9.0	1980	470	2710	9.9	9.1	2.27	3.24	3.89	-	-	9.40	3.0	10.6	2090	580	3010	10.3	9.4				
42+42+42	2.66	2.66	2.66	-	-	7.98	2.3	9.0	2230	340	3160	11.2	10.2	3.13	3.13	3.13	-	-	9.39	3.0	10.6	2270	460	3270	11.2	10.2				
42+42+50	2.51	2.51	2.98	-	-	8.00	2.3	9.0	2040	380	2860	10.2	9.4	2.95	2.95	3.50	-	-	9.40	3.0	10.6	2170	500	3120	10.7	9.8				
42+42+60	2.33	2.33	3.33	-	-	7.99	2.3	9.0	2040	380	2860	10.2	9.4	2.74	2.74	3.92	-	-	9.40	3.0	10.6	2170	500	3120	10.7	9.8				
42+50+50	2.36	2.82	2.82	-	-	8.00	2.3	9.0	1980	470	2710	9.9	9.1	2.78	3.31	3.31	-	-	9.40	3.0	10.6	2090	590	3000	10.3	9.4				
16+16+16+16	1.60	1.60	1.60	1.60	-	6.40	2.3	9.2	1490	420	2940	7.4	6.8	2.35	2.35	2.35	-	-	9.40	3.0	11.6	2060	490	3470	10.3	9.5				
16+16+16+20	1.60	1.60	1.60	2.00	-	6.80	2.3	9.2	1600	420	2870	7.9	7.3	2.21	2.21	2.21	2.77	-	9.40	3.0	11.6	2050	500	3460	10.3	9.4				
16+16+16+25	1.60	1.60	1.60	2.50	-	7.30	2.3	9.2	1760	420	2870	8.6	7.9	2.06	2.06	2.06	3.22	-	9.40	3.0	11.6	2050	500	3460	10.3	9.4				
16+16+16+35	1.54	1.54	1.54	3.38	-	8.00	2.3	9.2	1980	420	2870	9.7	8.9	1.81	1.81	1.81	3.97	-	9.40	3.0	11.6	2030	500	3420	10.2	9.3				
16+16+16+42	1.42	1.42	1.42	3.74	-	8.00	2.3	9.2	1980	420	2870	9.7	8.9	1.67	1.67	1.67	4.39	-	9.40	3.0	11.6	2020	510	3410	10.1	9.3				
16+16+16+50	1.31	1.31	1.31	4.07	-	8.00	2.3	9.2	1880	480	2730	9.2	8.5	1.53	1.53	1.53	4.81	-	9.40	3.0	11.6	2000	600	3340	10.0	9.2				
16+16+16+60	1.19	1.19	1.19	4.43	-	8.00	2.3	9.2	1880	480	2730	9.2	8.5	1.39	1.39	1.39	5.23	-	9.40	3.0	11.6	2000	600	3340	10.0	9.2				
16+16+16+71	1.08	1.08	1.08	4.76	-	8.00	2.3	9.2	1880	520	2660	9.2	8.5	1.26	1.26	1.26	5.62	-	9.40	3.0	11.6	1990	630	3320	10.0	9.1				
16+16+20+20	1.60	1.60	2.00	2.00	-	7.20	2.3	9.2	1710	420	2870	8.5	7.8	2.09	2.09	2.61	2.61	-	9.40	3.0	11.6	2040	500	3440	10.2	9.4				
16+16+20+25	1.60	1.60	2.00	2.50	-	7.70	2.3	9.2	1870	420	2870	9.2	8.4	1.95	1.95	2.44	3.06	-	9.40	3.0	11.6	2040	500	3440	10.2	9.4				
16+16+20+35	1.47	1.47	1.84	3.22	-	8.00	2.3	9.2	1930	420	2870	9.5	8.7	1.73	1.73	2.16	3.78	-	9.40	3.0	11.6	2020	510	3410	10.1	9.3				
16+16+20+42	1.36	1.36	1.70	3.58	-	8.00	2.3	9.2	1930	420	2870	9.5	8.7	1.60	1.60	2.00	4.20	-	9.40	3.0	11.6	2020	530	3400	10.1	9.3				
16+16+20+50	1.25	1.25	1.57	3.93	-	8.00	2.3	9.2	1880	480	2660	9.2	8.5	1.47	1.47	1.84	4.62	-	9.40	3.0	11.6	1990	620	3330	10.0	9.1				
16+16+20+60	1.14	1.14	1.43	4.29	-	8.00	2.3	9.2	1880	480	2660	9.2	8.5	1.34	1.34	1.68	5.04	-	9.40	3.0	11.6	1990	620	3330	10.0	9.1				
16+16+20+71	1.04	1.04	1.30	4.62	-	8.00	2.3	9.2	1880	520	2660	9.2	8.5	1.22	1.22	1.53	5.43	-	9.40	3.0	11.6	1980	630	3310	9.9	9.1				
16+16+25+25	1.56	1.56	2.44	2.44	-	8.00	2.3	9.2	1980	420	2870	9.7	8.9	1.83	1.83	2.87	2.87	-	9.40	3.0	11.6	2040	500	3440	10.2	9.4				
16+16+25+35	1.39	1.39	2.17	3.05	-	8.00	2.3	9.2	1930	420	2870	9.5	8.7	1.63	1.63	2.55	3.59	-	9.40	3.0	11.6	2020	510	3410	10.1	9.3				
16+16+25+42	1.29	1.29	2.02	3.40	-	8.00	2.3	9.2	1930	420	2870	9.5	8.7	1.52	1.52	2.37	3.99	-	9.40	3.0	11.6	2020	530	3400	10.1	9.3				
16+16+25+50	1.20	1.20	1.87	3.73	-	8.00	2.3	9.2	1880	480	2660	9.2	8.5	1.41	1.41	2.20	4.38	-	9.40	3.0	11.6	1990	620	3330	10.0	9.1				
16+16+25+60	1.09	1.09	1.71	4.11	-	8.00	2.3	9.2	1880	480	2660	9.2	8.5	1.29	1.29	2.01	4.81	-	9.40	3.0	11.6	1990	620	3330	10.0	9.1				
16+16+25+71	1.00	1.00	1.56	4.44	-	8.00	2.3	9.2	1880	520	2660	9.2	8.5	1.18	1.18	1.84	5.20	-	9.40	3.0	11.6	1980	630	3310	9.9	9.1				
16+16+35+35	1.25	1.25	2.75	2.75	-	8.00	2.3	9.2	1930	430	2800	9.5	8.7	1.47	1.47	3.23	3.23	-	9.40	3.0	11.6	2010	540	3380	10.1	9.2				
16+16+35+42	1.17	1.17	2.57	3.09	-	8.00	2.3	9.2	1930	430	2800	9.5	8.7	1.38	1.38	3.02	3.62	-	9.40	3.0	11.6	2000	540	3360	10.0	9.2				
16+16+35+50	1.09	1.09	2.39	3.43	-	8.00	2.3	9.2	1880	520	2660	9.2	8.5	1.29	1.29	2.81	4.01	-	9.40	3.0	11.6	1980	640	3300	9.9	9.1				
16+16+35+60	1.01	1.01	2.20	3.78	-	8.00	2.3	9.2	1880	520	2660	9.2	8.5	1.18	1.18	2.59	4.45	-	9.40	3.0	11.6	1980	640	3300	9.9	9.1				
16+16+35+71	0.93	0.93	2.03	4.11	-	8.00	2.3	9.2	1880	520	2660	9.2	8.5	1.09	1.09	2.38	4.84	-	9.40	3.0	11.6	1970	650	3290	9.9	9.0				
16+16+42+42	1.10	1.10	2.90	2.90	-	8.00	2.3	9.2	1930	430	2800	9.5	8.7	1.30	1.30	3.40	3.40	-	9.40	3.0	11.6	1990	550	3350	10.0	9.1				
16+16+42+50	1.03	1.03	2.71	3.23	-	8.00	2.3	9.2	1880	520	2660	9.2	8.5	1.21	1.21	3.18	3.80	-	9.40	3.0	11.6	1970	650	3290	9.9	9.0				
16+16+42+60	0.96	0.96	2.51	3.57	-	8.00	2.3	9.2	1880	520	2660	9.2	8.5	1.12	1.12	2.95	4.21	-	9.40	3.0	11.6	1970	650	3290	9.9	9.0				
16+16+42+71	0.88	0.88	2.32	3.92	-	8.00	2.3	9.2	1880	530	2660	9.2	8.5	1.04	1.04	2.72	4.60	-	9.40	3.0	11.6	1970	670	3280	9.9	9.0				
16+16+50+50	0.97	0.97	3.03	3.03	-	8.00	2.3	9.2	1890	580	2600	9.3	8.5	1.14	1.14	3.56	3.56	-	9.40</											

CU-4Z80WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity	COOLING OPERATION										HEATING OPERATION											
	Cooling Capacity [kW]					Input Power [W]		Current [A]		Heating Capacity [kW]					Input Power [W]		Current [A]					
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
20+20+50+50	1.14	1.14	2.86	2.86	-	8.00	2.3 ~ 9.2	1890	590 ~ 2610	9.3	8.5	1.34	1.34	3.36	3.36	-	9.40	3.0 ~ 11.6	2000	800 ~ 3290	10.0	9.2
20+25+25+25	1.67	2.11	2.11	2.11	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	1.99	2.47	2.47	2.47	-	9.40	3.0 ~ 11.6	2030	500 ~ 3420	10.2	9.3
20+25+25+35	1.52	1.90	1.90	2.68	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.79	2.24	2.24	3.13	-	9.40	3.0 ~ 11.6	2010	530 ~ 3380	10.1	9.2
20+25+25+42	1.43	1.79	1.79	2.99	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.68	2.10	2.10	3.52	-	9.40	3.0 ~ 11.6	2000	540 ~ 3370	10.0	9.2
20+25+25+50	1.33	1.67	1.67	3.33	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.57	1.96	1.96	3.91	-	9.40	3.0 ~ 11.6	1980	640 ~ 3310	9.9	9.1
20+25+25+60	1.23	1.54	1.54	3.69	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.45	1.81	1.81	4.33	-	9.40	3.0 ~ 11.6	1980	640 ~ 3310	9.9	9.1
20+25+25+71	1.13	1.42	1.42	4.03	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.33	1.67	1.67	4.73	-	9.40	3.0 ~ 11.6	1970	640 ~ 3290	9.9	9.0
20+25+35+35	1.39	1.75	2.43	2.43	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.63	2.05	2.86	2.86	-	9.40	3.0 ~ 11.6	1990	550 ~ 3350	10.0	9.1
20+25+35+42	1.31	1.64	2.30	2.75	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.54	1.93	2.70	3.23	-	9.40	3.0 ~ 11.6	1990	550 ~ 3340	10.0	9.1
20+25+35+50	1.23	1.54	2.15	3.08	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.45	1.81	2.53	3.61	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
20+25+35+60	1.14	1.43	2.00	3.43	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.34	1.68	2.35	4.03	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
20+25+42+42	1.24	1.56	2.60	2.60	-	8.00	2.3 ~ 9.2	1930	460 ~ 2800	9.5	8.7	1.46	1.82	3.06	3.06	-	9.40	3.0 ~ 11.6	1980	570 ~ 3330	9.9	9.1
20+25+42+50	1.17	1.46	2.45	2.92	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.37	1.72	2.88	3.43	-	9.40	3.0 ~ 11.6	2000	680 ~ 3270	10.0	9.2
20+25+42+60	1.09	1.36	2.29	3.26	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.28	1.60	2.69	3.83	-	9.40	3.0 ~ 11.6	2000	680 ~ 3270	10.0	9.2
20+25+50+50	1.10	1.38	2.76	2.76	-	8.00	2.3 ~ 9.2	1890	590 ~ 2610	9.3	8.5	1.30	1.62	3.24	3.24	-	9.40	3.0 ~ 11.6	2000	800 ~ 3290	10.0	9.2
20+35+35+35	1.28	2.24	2.24	2.24	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.51	2.63	2.63	2.63	-	9.40	3.0 ~ 11.6	1980	580 ~ 3320	9.9	9.1
20+35+35+42	1.21	2.12	2.12	2.55	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.42	2.49	2.49	3.00	-	9.40	3.0 ~ 11.6	1970	580 ~ 3370	9.9	9.0
20+35+35+50	1.14	2.00	2.00	2.86	-	8.00	2.3 ~ 9.2	1880	530 ~ 2660	9.2	8.5	1.34	2.35	3.36	3.36	-	9.40	3.0 ~ 11.6	2000	690 ~ 3310	10.0	9.2
20+35+42+42	1.15	2.01	2.42	2.42	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.35	2.37	2.84	2.84	-	9.40	3.0 ~ 11.6	1970	590 ~ 3360	9.9	9.0
20+35+42+50	1.09	1.90	2.29	2.72	-	8.00	2.3 ~ 9.2	1880	530 ~ 2660	9.2	8.5	1.28	2.24	2.69	3.19	-	9.40	3.0 ~ 11.6	1990	700 ~ 3300	10.0	9.1
20+42+42+42	1.10	2.30	2.30	2.30	-	8.00	2.3 ~ 9.2	1870	470 ~ 2730	9.2	8.4	1.30	2.70	2.70	2.70	-	9.40	3.0 ~ 11.6	2000	590 ~ 3350	10.0	9.2
25+25+25+25	2.00	2.00	2.00	2.00	-	8.00	2.3 ~ 9.2	1980	420 ~ 2870	9.7	8.9	2.35	2.35	2.35	2.35	-	9.40	3.0 ~ 11.6	2030	500 ~ 3420	10.2	9.3
25+25+25+35	1.82	1.82	1.82	2.54	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	2.14	2.14	2.14	2.98	-	9.40	3.0 ~ 11.6	2010	530 ~ 3380	10.1	9.2
25+25+25+42	1.71	1.71	1.71	2.87	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	2.01	2.01	2.01	3.37	-	9.40	3.0 ~ 11.6	2000	540 ~ 3370	10.0	9.2
25+25+25+50	1.60	1.60	1.60	3.20	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.88	1.88	1.88	3.76	-	9.40	3.0 ~ 11.6	1980	640 ~ 3310	9.9	9.1
25+25+25+60	1.48	1.48	1.48	3.56	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.74	1.74	1.74	4.18	-	9.40	3.0 ~ 11.6	1980	640 ~ 3310	9.9	9.1
25+25+25+71	1.37	1.37	1.37	3.89	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.61	1.61	1.61	4.57	-	9.40	3.0 ~ 11.6	1970	640 ~ 3290	9.9	9.0
25+25+35+35	1.67	1.67	2.33	2.33	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.96	1.96	2.74	2.74	-	9.40	3.0 ~ 11.6	1990	550 ~ 3350	10.0	9.1
25+25+35+42	1.57	1.57	2.20	2.66	-	8.00	2.3 ~ 9.2	1930	430 ~ 2800	9.5	8.7	1.85	1.85	2.59	3.11	-	9.40	3.0 ~ 11.6	1990	550 ~ 3340	10.0	9.1
25+25+35+50	1.48	1.48	2.07	2.97	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.74	1.74	2.44	3.48	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
25+25+35+60	1.38	1.38	1.93	3.31	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.62	1.62	2.27	3.89	-	9.40	3.0 ~ 11.6	1970	670 ~ 3280	9.9	9.0
25+25+42+42	1.49	1.49	2.51	2.51	-	8.00	2.3 ~ 9.2	1930	460 ~ 2800	9.5	8.7	1.75	1.75	2.95	2.95	-	9.40	3.0 ~ 11.6	1980	570 ~ 3330	9.9	9.1
25+25+42+50	1.41	1.41	2.37	2.81	-	8.00	2.3 ~ 9.2	1880	520 ~ 2660	9.2	8.5	1.65	1.65	2.78	3.32	-	9.40	3.0 ~ 11.6	2000	680 ~ 3270	10.0	9.2
25+35+35+35	1.55	2.15	2.15	2.15	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.81	2.53	2.53	2.53	-	9.40	3.0 ~ 11.6	1980	580 ~ 3320	9.9	9.1
25+35+35+42	1.46	2.04	2.04	2.46	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.72	2.40	2.40	2.88	-	9.40	3.0 ~ 11.6	1970	580 ~ 3370	9.9	9.0
25+35+35+50	1.38	1.93	1.93	2.76	-	8.00	2.3 ~ 9.2	1880	530 ~ 2660	9.2	8.5	1.62	2.27	2.27	3.24	-	9.40	3.0 ~ 11.6	2000	690 ~ 3310	10.0	9.2
25+35+42+42	1.39	1.95	2.33	2.33	-	8.00	2.3 ~ 9.2	1930	470 ~ 2730	9.5	8.7	1.63	2.29	2.74	2.74	-	9.40	3.0 ~ 11.6	1970	590 ~ 3360	9.9	9.0
35+35+35+35	2.00	2.00	2.00	2.00	-	8.00	2.3 ~ 9.2	1870	470 ~ 2730	9.2	8.4	2.35	2.35	2.35	2.35	-	9.40	3.0 ~ 11.6	2000	590 ~ 3350	10.0	9.2
35+35+35+42	1.90	1.90	1.90	2.30	-	8.00	2.3 ~ 9.2	1870	470 ~ 2730	9.2	8.4	2.24	2.24	2.24	2.68	-	9.40	3.0 ~ 11.6	2000	600 ~ 3340	10.0	9.2

CU-4Z80WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION										HEATING OPERATION											
	Cooling Capacity [kW]					Input Power [W]		Current [A]		Heating Capacity [kW]					Input Power [W]		Current [A]					
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
16	1.60	-	-	-	-	1.60	1.3 ~ 2.3	450	250 ~ 690	2.4	2.2	2.60	-	-	-	-	2.60	1.2 ~ 3.2	700	290 ~ 1060	3.5	3.2
20	2.00	-	-	-	-	2.00	1.8 ~ 2.9	550	340 ~ 860	2.8	2.6	3.20	-	-	-	-	3.20	1.2 ~ 4.1	840	290 ~ 1330	4.3	3.9
25	2.50	-	-	-	-	2.50	1.8 ~ 2.9	680	340 ~ 860	3.5	3.2	3.60	-	-	-	-	3.60	1.2 ~ 4.3	1040	290 ~ 1330	5.4	4.9
35	3.50	-	-	-	-	3.50	1.8 ~ 4.1	990	340 ~ 1410	5.0	4.6	4.50	-	-	-	-	4.50	1.2 ~ 5.8	1330	290 ~ 2200	6.8	6.2
42	4.20	-	-	-	-	4.20	1.8 ~ 4.5	1420	340 ~ 2040	6.9	6.3	5.60	-	-	-	-	5.60	1.2 ~ 6.8	1820	290 ~ 3030	8.8	8.0
50	5.00	-	-	-	-	5.00	1.9 ~ 5.4	1630	340 ~ 2150	7.9	7.3	6.80	-	-	-	-	6.80	1.2 ~ 6.9	2350	290 ~ 2840	11.3	10.4
60	6.00	-	-	-	-	6.00	1.9 ~ 6.2	2080	340 ~ 2380	9.8	9.0	8.50	-	-	-	-	8.50	1.3 ~ 9.0	2500	320 ~ 2650	12.1	11.0
71	7.10	-	-	-	-	7.10	2.0 ~ 7.2	2580	370 ~ 2820	12.2	11.2	8.70	-	-	-	-	8.70	1.4 ~ 9.2	2650	380 ~ 2820	12.8	11.7
16+16	1.60	1.60	-	-	-	3.20	2.3 ~ 5.8	830	350 ~ 2090	4.3	4.0	2.60	2.60	-	-	-	5.20	2.2 ~ 8.2	1760	430 ~ 3040	8.6	7.9
16+20	1.60	2.00	-	-	-	3.60	2.3 ~ 5.8	970	340 ~ 2090	5.0	4.6	2.58	3.22	-	-	-	5.80	2.2 ~ 8.2	1880	430 ~ 3030	9.2	8.5
16+25	1.60	2.50	-	-	-	4.10	2.3 ~ 5.8	1170	340 ~ 2090	6.0	5.5	2.42	3.78	-	-	-	6.20	2.2 ~ 8.2	2020	430 ~ 3030	9.9	9.1
16+35	1.60	3.50	-	-	-	5.10	2.3 ~ 5.8	1580	340 ~ 2020	8.0	7.3	2.23	4.87	-	-	-	7.10	2.2 ~ 8.6	2190	380 ~ 3110	10.8	9.9
16+42	1.60	4.20	-	-	-	5.80	2.3 ~ 6.7	1920	340 ~ 2580	9.6	8.8	2.26	5.94	-	-	-	8.20	2.2 ~ 9.8	2570	370 ~ 3640	12.6	11.6
16+50	1.60	5.00	-	-	-	6.60	2.3 ~ 7.2	2160	320 ~ 2580	10.8	9.9	2.28	7.12	-	-							

CU-4Z80WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION										HEATING OPERATION											
	Cooling Capacity [kW]					Input Power [W]		Current [A]		Heating Capacity [kW]					Input Power [W]		Current [A]					
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
16+42+71	0.99	2.60	4.41	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	1.17	3.06	5.17	-	-	9.40	3.0 ~ 10.6	2370	490 ~ 3340	11.6	10.7
16+50+50	1.10	3.45	3.45	-	-	8.00	2.3 ~ 8.8	2070	430 ~ 2730	10.4	9.5	1.30	4.05	4.05	-	-	9.40	3.0 ~ 10.6	2300	550 ~ 3230	11.3	10.4
16+50+60	1.02	3.17	3.81	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.19	3.73	4.48	-	-	9.40	3.0 ~ 10.6	2300	550 ~ 3230	11.3	10.4
16+50+71	0.93	2.92	4.15	-	-	8.00	2.3 ~ 9.0	2070	470 ~ 2800	10.4	9.5	1.10	3.43	4.87	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
16+60+60	0.94	3.53	3.53	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.10	4.15	4.15	-	-	9.40	3.0 ~ 10.6	2300	550 ~ 3230	11.3	10.4
16+60+71	0.87	3.27	3.86	-	-	8.00	2.3 ~ 9.0	2070	470 ~ 2800	10.4	9.5	1.02	3.84	4.54	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
20+20+20	2.00	2.00	2.00	-	-	6.00	2.3 ~ 8.5	1650	340 ~ 3180	8.3	7.6	3.13	3.13	3.13	-	-	9.39	3.0 ~ 10.4	2560	440 ~ 3540	12.6	11.5
20+20+25	2.00	2.00	2.50	-	-	6.50	2.3 ~ 8.5	1880	340 ~ 3180	9.4	8.6	2.89	2.89	3.62	-	-	9.40	3.0 ~ 10.4	2560	440 ~ 3540	12.6	11.5
20+20+35	2.00	2.00	3.50	-	-	7.50	2.3 ~ 8.5	2210	340 ~ 3100	11.1	10.1	2.51	2.51	4.38	-	-	9.40	3.0 ~ 10.4	2530	430 ~ 3500	12.4	11.4
20+20+42	1.95	1.95	4.10	-	-	8.00	2.3 ~ 8.6	2440	340 ~ 3180	12.2	11.2	2.29	2.29	4.82	-	-	9.40	3.0 ~ 10.4	2520	460 ~ 3490	12.4	11.3
20+20+50	1.78	1.78	4.44	-	-	8.00	2.3 ~ 8.6	2190	380 ~ 2800	11.0	10.0	2.09	2.09	5.22	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
20+20+60	1.60	1.60	4.80	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.88	1.88	5.64	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
20+20+71	1.44	1.44	5.12	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2870	11.0	10.0	1.69	1.69	6.02	-	-	9.40	3.0 ~ 10.6	2400	460 ~ 3380	11.8	10.8
20+25+25	2.00	2.50	2.50	-	-	7.00	2.3 ~ 8.5	2040	340 ~ 3180	10.2	9.4	2.68	3.36	3.36	-	-	9.40	3.0 ~ 10.4	2560	440 ~ 3540	12.6	11.5
20+25+35	2.00	2.50	3.50	-	-	8.00	2.3 ~ 8.6	2440	340 ~ 3180	12.2	11.2	2.35	2.94	4.11	-	-	9.40	3.0 ~ 10.4	2530	430 ~ 3500	12.4	11.4
20+25+42	1.84	2.30	3.86	-	-	8.00	2.3 ~ 8.6	2440	340 ~ 3180	12.2	11.2	2.16	2.70	4.54	-	-	9.40	3.0 ~ 10.5	2520	460 ~ 3550	12.4	11.3
20+25+50	1.68	2.11	4.21	-	-	8.00	2.3 ~ 8.6	2190	380 ~ 2800	11.0	10.0	1.98	2.47	4.95	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
20+25+60	1.52	1.90	4.58	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.79	2.24	5.37	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
20+25+71	1.38	1.72	4.90	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2870	11.0	10.0	1.62	2.03	5.75	-	-	9.40	3.0 ~ 10.6	2400	460 ~ 3380	11.8	10.8
20+35+35	1.78	3.11	3.11	-	-	8.00	2.3 ~ 8.6	2380	340 ~ 3100	11.9	10.9	2.08	3.66	3.66	-	-	9.40	3.0 ~ 10.5	2500	460 ~ 3460	12.3	11.3
20+35+42	1.65	2.89	3.46	-	-	8.00	2.3 ~ 8.6	2380	340 ~ 3100	11.9	10.9	1.94	3.39	4.07	-	-	9.40	3.0 ~ 10.5	2490	460 ~ 3450	12.2	11.2
20+35+50	1.52	2.67	3.81	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.79	3.13	4.48	-	-	9.40	3.0 ~ 10.5	2390	490 ~ 3300	11.7	10.8
20+35+60	1.39	2.43	4.18	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	1.63	2.86	4.91	-	-	9.40	3.0 ~ 10.6	2390	490 ~ 3360	11.7	10.8
20+35+71	1.27	2.22	4.51	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	1.49	2.61	5.30	-	-	9.40	3.0 ~ 10.6	2370	490 ~ 3340	11.6	10.7
20+42+42	1.54	3.23	3.23	-	-	8.00	2.3 ~ 8.8	2380	340 ~ 3180	11.9	10.9	1.80	3.80	3.80	-	-	9.40	3.0 ~ 10.5	2480	460 ~ 3440	12.2	11.2
20+42+50	1.43	3.00	3.57	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2870	11.0	10.0	1.68	3.53	4.19	-	-	9.40	3.0 ~ 10.6	2380	490 ~ 3350	11.7	10.7
20+42+60	1.31	2.75	3.94	-	-	8.00	2.3 ~ 9.0	2190	380 ~ 3020	11.0	10.0	1.54	3.24	4.62	-	-	9.40	3.0 ~ 10.6	2380	490 ~ 3350	11.7	10.7
20+42+71	1.20	2.53	4.27	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	1.41	2.97	5.02	-	-	9.40	3.0 ~ 10.6	2370	490 ~ 3330	11.6	10.7
20+50+50	1.33	3.33	3.33	-	-	7.99	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.56	3.92	3.92	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
20+50+60	1.23	3.08	3.69	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.45	3.62	4.33	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
20+50+71	1.13	2.84	4.03	-	-	8.00	2.3 ~ 9.0	2070	470 ~ 2800	10.4	9.5	1.33	3.33	4.74	-	-	9.40	3.0 ~ 10.6	2280	580 ~ 3210	11.2	10.3
20+60+60	1.14	3.43	3.43	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.34	4.03	4.03	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
25+25+25	2.50	2.50	2.50	-	-	7.50	2.3 ~ 8.5	2280	340 ~ 3180	11.4	10.5	3.13	3.13	3.13	-	-	9.39	3.0 ~ 10.4	2560	440 ~ 3540	12.6	11.5
25+25+35	2.35	2.35	3.30	-	-	8.00	2.3 ~ 8.6	2440	340 ~ 3180	12.2	11.2	2.76	2.76	3.88	-	-	9.40	3.0 ~ 10.4	2530	430 ~ 3500	12.4	11.4
25+25+42	2.17	2.17	3.66	-	-	8.00	2.3 ~ 8.6	2440	340 ~ 3180	12.2	11.2	2.55	2.55	4.30	-	-	9.40	3.0 ~ 10.5	2520	460 ~ 3550	12.4	11.3
25+25+50	2.00	2.00	4.00	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	2.35	2.35	4.70	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
25+25+60	1.82	1.82	4.36	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	2.14	2.14	5.12	-	-	9.40	3.0 ~ 10.5	2410	460 ~ 3330	11.8	10.9
25+25+71	1.65	1.65	4.70	-	-	8.00	2.3 ~ 9.0	2190	380 ~ 3020	11.0	10.0	1.94	1.94	5.52	-	-	9.40	3.0 ~ 10.6	2400	460 ~ 3380	11.8	10.8
25+35+35	2.10	2.95	2.95	-	-	8.00	2.3 ~ 8.6	2380	340 ~ 3100	11.9	10.9	2.48	3.46	3.46	-	-	9.40	3.0 ~ 10.5	2500	460 ~ 3460	12.3	11.3
25+35+42	1.96	2.75	3.29	-	-	8.00	2.3 ~ 8.8	2380	340 ~ 3250	11.9	10.9	2.30	3.23	3.87	-	-	9.40	3.0 ~ 10.5	2490	460 ~ 3450	12.2	11.2
25+35+50	1.82	2.55	3.63	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2950	11.0	10.0	2.14	2.99	4.27	-	-	9.40	3.0 ~ 10.5	2390	490 ~ 3300	11.7	10.8
25+35+60	1.67	2.33	4.00	-	-	8.00	2.3 ~ 9.0	2190	380 ~ 3020	11.0	10.0	1.96	2.74	4.70	-	-	9.40	3.0 ~ 10.6	2390	490 ~ 3360	11.7	10.8
25+35+71	1.53	2.14	4.33	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	1.79	2.51	5.10	-	-	9.40	3.0 ~ 10.6	2370	490 ~ 3340	11.6	10.7
25+42+42	1.84	3.08	3.08	-	-	8.00	2.3 ~ 8.8	2380	340 ~ 3180	11.9	10.9	2.16	3.62	3.62	-	-	9.40	3.0 ~ 10.5	2480	460 ~ 3440	12.2	11.2
25+42+50	1.71	2.87	3.42	-	-	8.00	2.3 ~ 8.8	2190	380 ~ 2870	11.0	10.0	2.01	3.37	4.02	-	-	9.40	3.0 ~ 10.6	2380	490 ~ 3350	11.7	10.7
25+42+60	1.57	2.65	3.78	-	-	8.00	2.3 ~ 9.0	2190	380 ~ 3020	11.0	10.0	1.85	3.11	4.44	-	-	9.40	3.0 ~ 10.6	2380	490 ~ 3350	11.7	10.7
25+42+71	1.45	2.43	4.12	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 2950	10.7	9.8	1.70	2.86	4.84	-	-	9.40	3.0 ~ 10.6	2370	490 ~ 3330	11.6	10.7
25+50+50	1.60	3.20	3.20	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.88	3.76	3.76	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
25+50+60	1.48	2.96	3.56	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.74	3.48	4.18	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
25+50+71	1.37	2.74	3.89	-	-	8.00	2.3 ~ 9.0	2070	470 ~ 2800	10.4	9.5	1.61	3.22	4.57	-	-	9.40	3.0 ~ 10.6	2280	580 ~ 3210	11.2	10.3
25+60+60	1.38	3.31	3.31	-	-	8.00	2.3 ~ 9.0	2070	430 ~ 2800	10.4	9.5	1.62	3.89	3.89	-	-	9.40	3.0 ~ 10.6	2290	550 ~ 3220	11.3	10.3
35+35+35	2.66	2.66	2.66	-	-	7.98	2.3 ~ 8.8	2320	340 ~ 3180	11.6	10.6	3.13	3.13	3.13	-	-	9.39	3.0 ~ 10.5	2480	460 ~ 3430	12.2	11.2
35+35+42	2.50	2.50	3.00	-	-	8.00	2.3 ~ 8.8	2320	340 ~ 3180	11.6	10.6	2.94	2.94	3.52	-	-	9.40	3.0 ~ 10.6	2470	460 ~ 3470	12.1	11.1
35+35+50	2.33	2.33	3.33	-	-	7.99	2.3 ~ 9.0	2130	380 ~ 3020	10.7	9.8	2.74	2.74	3.92	-	-	9.40	3.0 ~ 10.6	2360	490 ~ 3330	11.6	10.6
35+35+60	2.15	2.15	3.70	-	-	8.00	2.3 ~ 9.0	2130	380 ~ 3020	10.7	9											

CU-4Z80WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION										HEATING OPERATION															
	Cooling Capacity [kW]					Input Power [W]					Heating Capacity [kW]					Input Power [W]										
	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V
16+20+50+50	0.94	1.18	2.94	2.94	-	8.00	2.3	9.2	2010	590	2730	9.9	9.1	1.10	1.38	3.46	3.46	-	9.40	3.0	11.6	2250	790	3540	11.3	10.3
16+20+50+60	0.88	1.10	2.74	3.28	-	8.00	2.3	9.2	2010	590	2730	9.9	9.1	1.03	1.29	3.22	3.86	-	9.40	3.0	11.6	2250	790	3540	11.3	10.3
16+25+25+25	1.40	2.20	2.20	2.20	-	8.00	2.3	9.2	2100	420	2990	10.3	9.5	1.66	2.58	2.58	2.58	-	9.40	3.0	11.6	2280	500	3670	11.4	10.5
16+25+25+35	1.27	1.98	1.98	2.77	-	8.00	2.3	9.2	2050	420	2920	10.1	9.2	1.49	2.33	2.33	3.25	-	9.40	3.0	11.6	2260	530	3640	11.3	10.4
16+25+25+42	1.19	1.85	1.85	3.11	-	8.00	2.3	9.2	2050	430	2920	10.1	9.2	1.39	2.18	2.18	3.65	-	9.40	3.0	11.6	2250	530	3620	11.3	10.3
16+25+25+50	1.10	1.72	1.72	3.46	-	8.00	2.3	9.2	2000	480	2780	9.8	9.0	1.30	2.03	2.03	4.04	-	9.40	3.0	11.6	2230	630	3560	11.2	10.2
16+25+25+60	1.02	1.59	1.59	3.80	-	8.00	2.3	9.2	2000	480	2780	9.8	9.0	1.19	1.87	1.87	4.47	-	9.40	3.0	11.6	2230	630	3560	11.2	10.2
16+25+25+71	0.93	1.46	1.46	4.15	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.10	1.72	1.72	4.86	-	9.40	3.0	11.6	2220	640	3540	11.1	10.2
16+25+35+35	1.15	1.81	2.52	2.52	-	8.00	2.3	9.2	2050	430	2920	10.1	9.2	1.35	2.13	2.96	2.96	-	9.40	3.0	11.6	2240	540	3600	11.2	10.3
16+25+35+42	1.08	1.69	2.37	2.86	-	8.00	2.3	9.2	2050	430	2920	10.1	9.2	1.27	1.99	2.79	3.35	-	9.40	3.0	11.6	2230	550	3590	11.2	10.2
16+25+35+50	1.02	1.59	2.22	3.17	-	8.00	2.3	9.2	2050	420	2920	10.1	9.2	1.19	1.87	2.61	3.73	-	9.40	3.0	11.6	2210	550	3530	11.1	10.1
16+25+35+60	0.94	1.47	2.06	3.53	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.10	1.73	2.42	4.15	-	9.40	3.0	11.6	2210	650	3530	11.1	10.1
16+25+35+71	0.87	1.36	1.90	3.87	-	8.00	2.3	9.2	2000	530	2780	9.8	9.0	1.02	1.60	2.24	4.54	-	9.40	3.0	11.6	2210	670	3520	11.1	10.1
16+25+42+42	1.02	1.60	2.69	2.69	-	8.00	2.3	9.2	2050	430	2920	10.1	9.2	1.20	1.88	3.16	3.16	-	9.40	3.0	11.6	2230	550	3580	11.2	10.2
16+25+42+50	0.96	1.50	2.53	3.01	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.13	1.77	2.97	3.53	-	9.40	3.0	11.6	2210	670	3520	11.1	10.1
16+25+42+60	0.90	1.40	2.35	3.35	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.05	1.64	2.76	3.95	-	9.40	3.0	11.6	2210	670	3520	11.1	10.1
16+25+50+50	0.90	1.42	2.84	2.84	-	8.00	2.3	9.2	2010	590	2730	9.9	9.1	1.07	1.67	3.33	3.33	-	9.40	3.0	11.6	2250	790	3540	11.3	10.3
16+35+35+35	1.07	2.31	2.31	2.31	-	8.00	2.3	9.2	2050	470	2920	10.1	9.2	1.24	2.72	2.72	2.72	-	9.40	3.0	11.6	2220	550	3570	11.1	10.2
16+35+35+42	1.00	2.19	2.19	2.62	-	8.00	2.3	9.2	2050	470	2850	10.1	9.2	1.18	2.57	2.57	3.08	-	9.40	3.0	11.6	2220	580	3560	11.1	10.2
16+35+35+50	0.94	2.06	2.06	2.94	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.11	2.42	2.42	3.45	-	9.40	3.0	11.6	2240	680	3500	11.2	10.3
16+35+35+60	0.88	1.92	1.92	3.28	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.03	2.25	2.25	3.87	-	9.40	3.0	11.6	2240	680	3500	11.2	10.3
16+35+42+42	0.95	2.07	2.49	2.49	-	8.00	2.3	9.2	2050	470	2850	10.1	9.2	1.11	2.45	2.92	2.92	-	9.40	3.0	11.6	2210	580	3610	11.1	10.1
16+35+42+50	0.90	1.96	2.35	2.79	-	8.00	2.3	9.2	2000	530	2780	9.8	9.0	1.05	2.30	2.76	3.29	-	9.40	3.0	11.6	2240	690	3550	11.2	10.3
16+42+42+42	0.89	2.37	2.37	2.37	-	8.00	2.3	9.2	2050	470	2850	10.1	9.2	1.06	2.78	2.78	2.78	-	9.40	3.0	11.6	2210	590	3600	11.1	10.1
20+20+20+20	2.00	2.00	2.00	2.00	-	8.00	2.3	9.2	2100	420	2990	10.3	9.5	2.35	2.35	2.35	2.35	-	9.40	3.0	11.6	2270	500	3660	11.4	10.4
20+20+20+25	1.88	1.88	1.88	2.36	-	8.00	2.3	9.2	2100	420	2990	10.3	9.5	2.21	2.21	2.21	2.77	-	9.40	3.0	11.6	2270	500	3660	11.4	10.4
20+20+20+35	1.68	1.68	1.68	2.96	-	8.00	2.3	9.2	2050	430	2920	10.1	9.2	1.98	1.98	1.98	3.46	-	9.40	3.0	11.6	2250	530	3620	11.3	10.3
20+20+20+42	1.57	1.57	1.57	3.29	-	8.00	2.3	9.2	2050	430	2920	10.1	9.2	1.84	1.84	1.84	3.88	-	9.40	3.0	11.6	2240	540	3610	11.2	10.3
20+20+20+50	1.45	1.45	1.45	3.65	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.71	1.71	1.71	4.27	-	9.40	3.0	11.6	2220	640	3550	11.1	10.2
20+20+20+60	1.33	1.33	1.33	4.01	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.57	1.57	1.57	4.69	-	9.40	3.0	11.6	2220	640	3550	11.1	10.2
20+20+20+71	1.22	1.22	1.22	4.34	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.44	1.44	1.44	5.08	-	9.40	3.0	11.6	2210	640	3530	11.1	10.1
20+20+25+25	1.78	1.78	2.22	2.22	-	8.00	2.3	9.2	2100	420	2990	10.3	9.5	2.09	2.09	2.61	2.61	-	9.40	3.0	11.6	2270	500	3660	11.4	10.4
20+20+25+35	1.60	1.60	2.00	2.80	-	8.00	2.3	9.2	2050	430	2920	10.1	9.2	1.88	1.88	2.35	3.29	-	9.40	3.0	11.6	2250	530	3620	11.3	10.3
20+20+25+42	1.50	1.50	1.87	3.13	-	8.00	2.3	9.2	2050	430	2920	10.1	9.2	1.76	1.76	2.20	3.68	-	9.40	3.0	11.6	2240	540	3610	11.2	10.3
20+20+25+50	1.39	1.39	1.74	3.48	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.63	1.63	2.04	4.10	-	9.40	3.0	11.6	2220	640	3550	11.1	10.2
20+20+25+60	1.28	1.28	1.60	3.84	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.50	1.50	1.88	4.52	-	9.40	3.0	11.6	2220	640	3550	11.1	10.2
20+20+25+71	1.18	1.18	1.47	4.17	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.38	1.38	1.73	4.91	-	9.40	3.0	11.6	2210	640	3530	11.1	10.1
20+20+35+35	1.45	1.45	2.55	2.55	-	8.00	2.3	9.2	2050	430	2920	10.1	9.2	1.71	1.71	2.99	2.99	-	9.40	3.0	11.6	2230	550	3590	11.2	10.2
20+20+35+42	1.37	1.37	2.39	2.87	-	8.00	2.3	9.2	2050	430	2920	10.1	9.2	1.61	1.61	2.81	3.37	-	9.40	3.0	11.6	2230	550	3580	11.2	10.2
20+20+35+50	1.28	1.28	2.24	3.20	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.50	1.50	2.63	3.77	-	9.40	3.0	11.6	2210	670	3520	11.1	10.1
20+20+35+60	1.19	1.19	2.07	3.55	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.39	1.39	2.44	4.18	-	9.40	3.0	11.6	2210	670	3520	11.1	10.1
20+20+35+71	1.10	1.10	1.92	3.88	-	8.00	2.3	9.2	2000	530	2780	9.8	9.0	1.29	1.29	2.25	4.57	-	9.40	3.0	11.6	2240	680	3510	11.2	10.3
20+20+42+42	1.29	1.29	2.71	2.71	-	8.00	2.3	9.2	2050	460	2920	10.1	9.2	1.52	1.52	3.18	3.18	-	9.40	3.0	11.6	2220	570	3570	11.1	10.2
20+20+42+50	1.21	1.21	2.55	3.03	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.42	1.42	2.99	3.57	-	9.40	3.0	11.6	2240	680	3510	11.2	10.3
20+20+42+60	1.13	1.13	2.37	3.37	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.32	1.32	2.78	3.98	-	9.40	3.0	11.6	2240	680	3510	11.2	10.3
20+20+50+50	1.14	1.14	2.86	2.86	-	8.00	2.3	9.2	2010	590	2730	9.9	9.1	1.34	1.34	3.36	3.36	-	9.40	3.0	11.6	2240	800	3530	11.2	10.3
20+25+25+25	1.67	2.11	2.11	2.11	-	8.00	2.3	9.2	2100	420	2990	10.3	9.5	1.99	2.47	2.47	2.47	-	9.40	3.0	11.6	2270	500	3660	11.4	10.4
20+25+25+35	1.52	1.90	1.90	2.68	-	8.00	2.3	9.2	2050	430	2920	10.1	9.2	1.79	2.24	2.24	3.13	-	9.40	3.0	11.6	2250	530	3620	11.3	10.3
20+25+25+42	1.43	1.79	1.79	2.99	-	8.00	2.3	9.2	2050	430	2920	10.1	9.2	1.68	2.10	2.10	3.52	-	9.40	3.0	11.6	2240	540	3610	11.2	10.3
20+25+25+50	1.33	1.67	1.67	3.33	-	8.00	2.3	9.2	2000	520	2780	9.8	9.0	1.57	1.96	1.96	3									

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION										
	Cooling Capacity [kW]						Input Power [W]		Current [A]		Heating Capacity [kW]						Input Power [W]		Current [A]			
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
25+71	2.50	7.10	-	-	-	9.60	2.3 ~ 10.1	3570	260 ~ 4220	17.9	16.4	3.13	8.87	-	-	-	12.00	2.0 ~ 13.0	3190	160 ~ 4050	15.7	14.4
35+35	3.50	3.50	-	-	-	7.00	2.3 ~ 8.1	2290	250 ~ 3100	11.5	10.5	4.50	4.50	-	-	-	9.00	2.0 ~ 11.0	2530	200 ~ 3300	12.4	11.4
35+42	3.50	4.20	-	-	-	7.70	2.3 ~ 8.6	2710	250 ~ 3590	13.6	12.4	4.59	5.51	-	-	-	10.10	2.0 ~ 11.0	2880	200 ~ 3240	14.1	13.0
35+50	3.50	5.00	-	-	-	8.50	2.3 ~ 9.1	2850	230 ~ 3200	14.3	13.1	4.65	6.65	-	-	-	11.30	2.0 ~ 13.0	2840	160 ~ 4040	14.0	12.8
35+60	3.50	6.00	-	-	-	9.50	2.3 ~ 10.1	3610	230 ~ 4220	18.1	16.6	4.42	7.58	-	-	-	12.00	2.0 ~ 13.0	3130	160 ~ 4040	15.4	14.1
35+71	3.30	6.70	-	-	-	10.00	2.3 ~ 10.4	3860	260 ~ 4380	19.3	17.7	3.96	8.04	-	-	-	12.00	2.0 ~ 13.8	3120	160 ~ 4390	15.3	14.1
42+42	4.20	4.20	-	-	-	8.40	2.3 ~ 9.1	3380	250 ~ 4000	16.9	15.5	5.60	5.60	-	-	-	11.20	2.0 ~ 13.0	3020	190 ~ 4230	14.8	13.6
42+50	4.20	5.00	-	-	-	9.20	2.3 ~ 10.0	3270	230 ~ 4070	16.4	15.0	5.48	6.52	-	-	-	12.00	2.0 ~ 13.0	3120	160 ~ 3970	15.3	14.1
42+60	4.12	5.88	-	-	-	10.00	2.3 ~ 10.4	4070	230 ~ 4370	20.4	18.7	4.94	7.06	-	-	-	12.00	2.0 ~ 13.8	3120	160 ~ 4390	15.3	14.1
42+71	3.72	6.28	-	-	-	10.00	2.3 ~ 10.4	3790	260 ~ 4380	19.0	17.4	4.46	7.54	-	-	-	12.00	2.0 ~ 13.8	3110	160 ~ 4380	15.3	14.0
50+50	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3310	250 ~ 3650	16.6	15.2	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	2910	170 ~ 4140	14.3	13.1
50+60	4.55	5.45	-	-	-	10.00	2.3 ~ 10.4	3310	250 ~ 3650	16.6	15.2	5.45	6.55	-	-	-	12.00	2.0 ~ 13.8	2910	170 ~ 4140	14.3	13.1
50+71	4.13	5.87	-	-	-	10.00	2.3 ~ 10.4	3170	250 ~ 3520	15.9	14.5	4.96	7.04	-	-	-	12.00	2.0 ~ 13.8	2890	170 ~ 4120	14.2	13.0
60+60	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3310	250 ~ 3650	16.6	15.2	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	2910	170 ~ 4140	14.3	13.1
60+71	4.58	5.42	-	-	-	10.00	2.3 ~ 10.4	3170	250 ~ 3520	15.9	14.5	5.50	6.50	-	-	-	12.00	2.0 ~ 13.8	2890	170 ~ 4120	14.2	13.0
71+71	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3040	280 ~ 3380	15.2	13.9	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	2880	180 ~ 4100	14.1	13.0
16+16+16	1.60	1.60	1.60	-	-	4.80	2.3 ~ 8.5	1050	260 ~ 2680	5.4	4.9	2.60	2.60	-	-	-	7.80	2.7 ~ 12.3	1920	230 ~ 3640	9.4	8.6
16+16+20	1.60	1.60	2.00	-	-	5.20	2.3 ~ 8.5	1160	260 ~ 2680	5.9	5.4	2.58	2.58	3.24	-	-	8.40	2.7 ~ 12.3	2140	230 ~ 3620	10.5	9.6
16+16+25	1.60	1.60	2.50	-	-	5.70	2.3 ~ 8.5	1350	260 ~ 2680	6.8	6.3	2.47	2.47	3.86	-	-	8.80	2.7 ~ 12.3	2210	230 ~ 3620	10.9	10.0
16+16+35	1.60	1.60	3.50	-	-	6.70	2.3 ~ 8.5	1670	260 ~ 2610	8.4	7.7	2.32	2.32	5.06	-	-	9.70	2.7 ~ 12.3	2520	230 ~ 3540	12.4	11.3
16+16+42	1.60	1.60	4.20	-	-	7.40	2.3 ~ 8.5	2010	250 ~ 2550	10.1	9.2	2.34	2.34	6.12	-	-	10.80	2.7 ~ 12.3	2650	230 ~ 3520	13.0	11.9
16+16+50	1.60	1.60	5.00	-	-	8.20	2.3 ~ 8.7	2170	280 ~ 2350	10.9	10.0	2.34	2.34	7.32	-	-	12.00	2.7 ~ 12.9	2870	250 ~ 3610	14.1	12.9
16+16+60	1.60	1.60	6.00	-	-	9.20	2.3 ~ 10.1	2510	280 ~ 3060	12.6	11.5	2.09	2.09	7.82	-	-	12.00	2.7 ~ 13.6	2870	250 ~ 3970	14.1	12.9
16+16+71	1.55	1.55	6.90	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.86	1.86	8.28	-	-	12.00	2.7 ~ 13.6	2860	250 ~ 3890	14.1	12.9
16+20+20	1.60	2.00	2.00	-	-	5.60	2.3 ~ 8.5	1300	260 ~ 2610	6.6	6.0	2.58	3.21	3.21	-	-	9.00	2.7 ~ 12.3	2250	230 ~ 3610	11.1	10.1
16+20+25	1.60	2.00	2.50	-	-	6.10	2.3 ~ 8.5	1510	260 ~ 2610	7.6	7.0	2.47	3.08	3.85	-	-	9.40	2.7 ~ 12.3	2390	230 ~ 3610	11.7	10.8
16+20+35	1.60	2.00	3.50	-	-	7.10	2.3 ~ 8.5	1840	250 ~ 2550	9.2	8.4	2.32	2.90	5.08	-	-	10.30	2.7 ~ 12.3	2550	230 ~ 3520	12.5	11.5
16+20+42	1.60	2.00	4.20	-	-	7.80	2.3 ~ 8.5	2120	250 ~ 2550	10.6	9.7	2.34	2.92	6.14	-	-	11.40	2.7 ~ 12.9	2790	230 ~ 3800	13.7	12.6
16+20+50	1.60	2.00	5.00	-	-	8.60	2.3 ~ 9.6	2360	280 ~ 2680	11.8	10.8	2.23	2.79	6.98	-	-	12.00	2.7 ~ 13.6	2860	250 ~ 3890	14.1	12.9
16+20+60	1.60	2.00	6.00	-	-	9.60	2.3 ~ 10.1	2680	280 ~ 3000	13.4	12.3	2.00	2.50	7.50	-	-	12.00	2.7 ~ 13.6	2860	250 ~ 3890	14.1	12.9
16+20+71	1.50	1.87	6.63	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.80	2.24	7.96	-	-	12.00	2.7 ~ 13.8	2850	250 ~ 4000	14.0	12.8
16+25+25	1.60	2.50	2.50	-	-	6.60	2.3 ~ 8.5	1720	260 ~ 2610	8.7	8.0	2.38	3.71	3.71	-	-	9.80	2.7 ~ 12.3	2590	230 ~ 3610	12.7	11.7
16+25+35	1.60	2.50	3.50	-	-	7.60	2.3 ~ 8.5	2120	250 ~ 2550	10.6	9.7	2.25	3.52	4.93	-	-	10.70	2.7 ~ 12.3	2690	230 ~ 3520	13.2	12.1
16+25+42	1.60	2.50	4.20	-	-	8.30	2.3 ~ 8.7	2420	250 ~ 2600	12.1	11.1	2.28	3.55	5.97	-	-	11.80	2.7 ~ 12.9	2930	230 ~ 3800	14.4	13.2
16+25+50	1.60	2.50	5.00	-	-	9.10	2.3 ~ 10.1	2450	280 ~ 3000	12.3	11.2	2.11	3.30	6.59	-	-	12.00	2.7 ~ 13.6	2860	250 ~ 3890	14.1	12.9
16+25+60	1.58	2.48	5.94	-	-	10.00	2.3 ~ 10.7	2930	280 ~ 3540	14.7	13.4	1.90	2.97	7.13	-	-	12.00	2.7 ~ 13.6	2860	250 ~ 3890	14.1	12.9
16+25+71	1.43	2.23	6.34	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.71	2.68	7.61	-	-	12.00	2.7 ~ 13.8	2850	250 ~ 4000	14.0	12.8
16+35+35	1.60	3.50	3.50	-	-	8.60	2.3 ~ 9.6	2550	250 ~ 2990	12.8	11.7	2.16	4.72	4.72	-	-	11.60	2.7 ~ 13.6	2820	230 ~ 4140	13.9	12.7
16+35+42	1.60	3.50	4.20	-	-	9.30	2.3 ~ 10.1	2830	250 ~ 3390	14.2	13.0	2.06	4.52	5.42	-	-	12.00	2.7 ~ 13.6	2950	240 ~ 4130	14.5	13.3
16+35+50	1.58	3.47	4.95	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.90	4.16	5.94	-	-	12.00	2.7 ~ 13.6	2780	250 ~ 3860	13.7	12.5
16+35+60	1.44	3.15	5.41	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.73	3.78	6.49	-	-	12.00	2.7 ~ 13.8	2780	250 ~ 3980	13.7	12.5
16+35+71	1.31	2.87	5.82	-	-	10.00	2.3 ~ 10.7	2800	280 ~ 3260	14.0	12.8	1.58	3.44	6.98	-	-	12.00	2.7 ~ 13.8	2770	270 ~ 3960	13.6	12.5
16+42+42	1.60	4.20	4.20	-	-	10.00	2.3 ~ 10.7	3260	250 ~ 3970	16.3	15.0	1.92	5.04	5.04	-	-	12.00	2.7 ~ 13.6	2940	240 ~ 4050	14.4	13.2
16+42+50	1.48	3.89	4.63	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.78	4.67	5.55	-	-	12.00	2.7 ~ 13.8	2770	270 ~ 3970	13.6	12.5
16+42+60	1.36	3.56	5.08	-	-	10.00	2.3 ~ 10.7	2870	280 ~ 3400	14.4	13.2	1.63	4.27	6.10	-	-	12.00	2.7 ~ 13.8	2770	270 ~ 3970	13.6	12.5
16+42+71	1.24	3.26	5.50	-	-	10.00	2.3 ~ 10.7	2800	280 ~ 3260	14.0	12.8	1.49	3.91	6.60	-	-	12.00	2.7 ~ 14.1	2760	270 ~ 4070	13.6	12.4
16+50+50	1.38	4.31	4.31	-	-	10.00	2.3 ~ 10.7	2610	320 ~ 3000	13.1	12.0	1.66	5.17	5.17	-	-	12.00	2.7 ~ 13.8	2660	300 ~ 3760	13.1	12.0
16+50+60	1.27	3.97	4.76	-	-	10.00	2.3 ~ 10.7	2610	320 ~ 3000	13.1	12.0	1.53	4.76	5.71	-	-	12.00	2.7 ~ 13.8	2660	300 ~ 3760	13.1	12.0
16+50+71	1.17	3.65	5.18	-	-	10.00	2.3 ~ 10.7	2550	340 ~ 2930	12.8	11.7	1.40	4.38	6.22	-	-	12.00	2.7 ~ 14.1	2650	310 ~ 3920	13.0	11.9
16+60+60	1.18	4.41	4.41	-	-	10.00	2.3 ~ 10.7	2610	320 ~ 3000	13.1	12.0	1.42	5.29	5.29	-	-	12.00	2.7 ~ 14.1	2660	300 ~ 3930	13.1	12.0
16+60+71	1.09	4.08	4.83	-	-	10.00	2.3 ~ 10.7	2550	340 ~ 2930	12.8	11.7	1.31	4.90	5.79	-	-	12.00	2.7 ~ 14.1	2650	310 ~ 3920	13.0	11.9
20+20+20	2.00	2.00	2.00	-	-	6.00	2.3 ~ 8.5	1490	260 ~ 2610	7.3	6.7	3.20	3.20	3.20	-	-	9.60	2.7 ~ 12.3	2480	230 ~ 3600	12.2	11.2
20+20+25	2.00	2.00	2.50	-	-	6.50	2.3 ~ 8.5	1660	260 ~ 2610	8.4	7.7	3.08	3.08	3.84	-	-	10.00	2.7 ~ 12.3	2630	230 ~ 3600	12.9	11.8
20+20+35	2.00	2.00	3.50	-	-	7.50	2.3 ~ 8.5	2010	250 ~ 2550	10.1	9.2	2.91	2.91	5.08	-	-	10.90	2.7 ~ 12.3	2690	230 ~ 3510	13.2	12.1
20+20+42	2.00	2.00	4.20	-	-	8.20	2.3 ~ 8.7	2360	250 ~ 2600	11.8	10.8	2.93	2.93	6.14	-	-	12.00	2.7 ~ 12.9	3020			

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity	COOLING OPERATION												HEATING OPERATION													
	Cooling Capacity [kW]						Input Power [W]			Current [A]			Heating Capacity [kW]						Input Power [W]			Current [A]				
	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V
42+42+60	2.92	2.92	4.16	-	-	10.00	2.3	10.7	2740	280	3260	13.7	12.6	3.50	3.50	5.00	-	-	12.00	2.7	14.1	2730	280	4020	13.4	12.3
42+42+71	2.71	2.71	4.58	-	-	10.00	2.3	10.7	2680	310	3130	13.4	12.3	3.25	3.25	5.50	-	-	12.00	2.7	14.4	2710	280	4130	13.3	12.2
42+50+50	2.96	3.52	3.52	-	-	10.00	2.3	10.7	2550	350	2930	12.8	11.7	3.54	4.23	4.23	-	-	12.00	2.7	14.1	2670	330	3870	13.1	12.0
42+50+60	2.76	3.29	3.95	-	-	10.00	2.3	10.7	2550	350	2930	12.8	11.7	3.32	3.95	4.73	-	-	12.00	2.7	14.4	2670	330	3990	13.1	12.0
42+50+71	2.58	3.07	4.35	-	-	10.00	2.3	10.7	2490	350	2870	12.5	11.4	3.09	3.68	5.23	-	-	12.00	2.7	14.4	2650	340	3980	13.0	11.9
42+60+60	2.60	3.70	3.70	-	-	10.00	2.3	10.7	2550	350	2930	12.8	11.7	3.12	4.44	4.44	-	-	12.00	2.7	14.4	2670	330	3990	13.1	12.0
42+60+71	2.43	3.47	4.10	-	-	10.00	2.3	10.7	2490	350	2870	12.5	11.4	2.92	4.16	4.92	-	-	12.00	2.7	14.4	2650	340	3980	13.0	11.9
50+50+50	3.33	3.33	3.33	-	-	9.99	2.3	10.7	2380	390	2740	11.9	10.9	4.00	4.00	4.00	-	-	12.00	2.7	14.4	2620	400	3910	12.9	11.8
50+50+60	3.13	3.13	3.74	-	-	10.00	2.3	10.7	2440	390	2740	12.2	11.2	3.75	3.75	4.50	-	-	12.00	2.7	14.4	2620	400	3910	12.9	11.8
50+50+71	2.92	2.92	4.16	-	-	10.00	2.3	10.7	2380	390	2750	11.9	10.9	3.51	3.51	4.98	-	-	12.00	2.7	14.4	2610	410	3890	12.8	11.8
50+60+60	2.94	3.53	3.53	-	-	10.00	2.3	10.7	2460	390	2740	12.2	11.2	3.52	4.24	4.24	-	-	12.00	2.7	14.4	2620	400	3910	12.9	11.8
50+60+71	2.77	3.31	3.92	-	-	10.00	2.3	10.7	2380	390	2750	11.9	10.9	3.31	3.98	4.71	-	-	12.00	2.7	14.4	2610	410	3890	12.8	11.8
60+60+60	3.33	3.33	3.33	-	-	9.99	2.3	10.7	2380	390	2740	11.9	10.9	4.00	4.00	4.00	-	-	12.00	2.7	14.4	2620	400	3910	12.9	11.8
16+16+16+16	1.60	1.60	1.60	1.60	-	6.40	2.3	10.6	1480	310	3560	7.5	6.9	2.60	2.60	2.60	2.60	-	10.40	3.4	14.2	2400	340	4160	11.8	10.8
16+16+16+20	1.60	1.60	1.60	2.00	-	6.80	2.3	10.6	1620	310	3560	8.2	7.5	2.59	2.59	2.59	3.23	-	11.00	3.4	14.2	2540	340	4150	12.5	11.4
16+16+16+25	1.60	1.60	1.60	2.50	-	7.30	2.3	10.6	1780	310	3560	8.9	8.2	2.50	2.50	2.50	3.90	-	11.40	3.4	14.2	2600	340	4150	12.8	11.7
16+16+16+35	1.60	1.60	1.60	3.50	-	8.30	2.3	10.6	2170	310	3480	10.9	10.0	2.31	2.31	2.31	5.07	-	12.00	3.4	14.2	2760	340	4110	13.6	12.4
16+16+16+42	1.60	1.60	1.60	4.20	-	9.00	2.3	10.6	2460	310	3480	12.3	11.3	2.13	2.13	2.13	5.61	-	12.00	3.4	14.2	2750	340	4100	13.5	12.4
16+16+16+50	1.60	1.60	1.60	5.00	-	9.80	2.3	10.6	2660	350	3190	13.3	12.2	1.96	1.96	1.96	6.12	-	12.00	3.4	14.2	2690	390	3950	13.2	12.1
16+16+16+60	1.48	1.48	1.48	5.56	-	10.00	2.3	10.6	2790	350	3190	14.0	12.8	1.78	1.78	1.78	6.66	-	12.00	3.4	14.2	2690	390	3950	13.2	12.1
16+16+16+71	1.34	1.34	1.34	5.98	-	10.00	2.3	10.6	2730	380	3120	13.7	12.5	1.61	1.61	1.61	7.17	-	12.00	3.4	14.2	2680	400	3930	13.2	12.1
16+16+20+20	1.60	1.60	2.00	2.00	-	7.20	2.3	10.6	1730	310	3480	8.7	8.0	2.58	2.58	3.22	3.22	-	11.60	3.4	14.2	2630	340	4130	12.9	11.8
16+16+20+25	1.60	1.60	2.00	2.50	-	7.70	2.3	10.6	1930	310	3480	9.7	8.9	2.49	2.49	3.12	3.90	-	12.00	3.4	14.2	2770	340	4130	13.6	12.5
16+16+20+35	1.60	1.60	2.00	3.50	-	8.70	2.3	10.6	2330	310	3410	11.7	10.7	2.21	2.21	2.76	4.82	-	12.00	3.4	14.2	2750	340	4100	13.5	12.4
16+16+20+42	1.60	1.60	2.00	4.20	-	9.40	2.3	10.6	2620	310	3410	13.1	12.0	2.04	2.04	2.56	5.36	-	12.00	3.4	14.2	2740	340	4080	13.5	12.3
16+16+20+50	1.57	1.57	1.96	4.90	-	10.00	2.3	10.6	2790	350	3190	14.0	12.8	1.88	1.88	2.36	5.88	-	12.00	3.4	14.2	2680	400	3930	13.2	12.1
16+16+20+60	1.43	1.43	1.79	5.35	-	10.00	2.3	10.6	2790	350	3190	14.0	12.8	1.71	1.71	2.15	6.43	-	12.00	3.4	14.2	2680	400	3930	13.2	12.1
16+16+20+71	1.30	1.30	1.63	5.77	-	10.00	2.3	10.8	2730	380	3260	13.7	12.5	1.56	1.56	1.95	6.93	-	12.00	3.4	14.2	2670	400	3920	13.1	12.0
16+16+25+25	1.60	1.60	2.50	2.50	-	8.20	2.3	10.6	2110	310	3480	10.6	9.7	2.34	2.34	3.66	3.66	-	12.00	3.4	14.2	2770	340	4130	13.6	12.5
16+16+25+35	1.60	1.60	2.50	3.50	-	9.20	2.3	10.6	2560	310	3410	12.8	11.7	2.09	2.09	3.26	4.56	-	12.00	3.4	14.2	2750	340	4100	13.5	12.4
16+16+25+42	1.60	1.60	2.50	4.20	-	9.90	2.3	10.6	2920	310	3410	14.6	13.4	1.94	1.94	3.03	5.09	-	12.00	3.4	14.2	2740	340	4080	13.5	12.3
16+16+25+50	1.50	1.50	2.34	4.66	-	10.00	2.3	10.6	2790	350	3190	14.0	12.8	1.79	1.79	2.81	5.61	-	12.00	3.4	14.2	2680	400	3930	13.2	12.1
16+16+25+60	1.37	1.37	2.14	5.12	-	10.00	2.3	10.6	2790	350	3190	14.0	12.8	1.64	1.64	2.57	6.15	-	12.00	3.4	14.2	2680	400	3930	13.2	12.1
16+16+25+71	1.25	1.25	1.95	5.55	-	10.00	2.3	10.8	2730	380	3260	13.7	12.5	1.50	1.50	2.34	6.66	-	12.00	3.4	14.4	2670	400	3980	13.1	12.0
16+16+35+35	1.57	1.57	3.43	3.43	-	10.00	2.3	10.6	2920	320	3410	14.6	13.4	1.88	1.88	4.12	4.12	-	12.00	3.4	14.2	2720	360	4060	13.4	12.2
16+16+35+42	1.47	1.47	3.21	3.85	-	10.00	2.3	10.6	2920	320	3330	14.6	13.4	1.76	1.76	3.86	4.62	-	12.00	3.4	14.2	2710	360	3980	13.3	12.2
16+16+35+50	1.37	1.37	2.99	4.27	-	10.00	2.3	10.6	2730	380	3120	13.7	12.5	1.64	1.64	3.59	5.13	-	12.00	3.4	14.2	2660	420	3900	13.1	12.0
16+16+35+60	1.26	1.26	2.76	4.72	-	10.00	2.3	10.8	2730	380	3260	13.7	12.5	1.51	1.51	3.31	5.67	-	12.00	3.4	14.2	2660	420	3900	13.1	12.0
16+16+35+71	1.16	1.16	2.54	5.14	-	10.00	2.3	10.8	2730	390	3190	13.7	12.5	1.39	1.39	3.05	6.17	-	12.00	3.4	14.4	2650	420	3940	13.0	11.9
16+16+42+42	1.38	1.38	3.62	3.62	-	10.00	2.3	10.6	2920	320	3330	14.6	13.4	1.66	1.66	4.34	4.34	-	12.00	3.4	14.2	2700	370	3970	13.3	12.2
16+16+42+50	1.29	1.29	3.39	4.03	-	10.00	2.3	10.8	2730	380	3260	13.7	12.5	1.55	1.55	4.06	4.84	-	12.00	3.4	14.2	2650	420	3890	13.0	11.9
16+16+42+60	1.19	1.19	3.14	4.48	-	10.00	2.3	10.8	2730	380	3260	13.7	12.5	1.43	1.43	3.77	5.37	-	12.00	3.4	14.4	2650	420	3950	13.0	11.9
16+16+42+71	1.10	1.10	2.90	4.90	-	10.00	2.3	11.0	2730	390	3340	13.7	12.5	1.32	1.32	3.48	5.88	-	12.00	3.4	14.4	2640	430	3930	13.0	11.9
16+16+50+50	1.21	1.21	3.79	3.79	-	10.00	2.3	10.8	2610	430	3060	13.1	12.0	1.45	1.45	4.55	4.55	-	12.00	3.4	14.4	2610	490	3870	12.8	11.8
16+16+50+60	1.13	1.13	3.52	4.22	-	10.00	2.3	11.0	2610	430	3200	13.1	12.0	1.35	1.35	4.23	5.07	-	12.00	3.4	14.4	2610	490	3870	12.8	11.8
16+16+50+71	1.05	1.05	3.27	4.63	-	10.00	2.3	11.0	2610	460	3200	13.1	12.0	1.25	1.25	3.93	5.57	-	12.00	3.4	14.4	2650	510	3860	13.0	11.9
16+16+60+60	1.05	1.05	3.95	3.95	-	10.00	2.3	11.0	2610	430	3200	13.1	12.0	1.26	1.26	4.74	4.74	-	12.00	3.4	14.4	2610	490	3870	12.8	11.8
16+16+60+71	0.98	0.98	3.68	4.36	-	10.00	2.3	11.2	2610	460	3280	13.1	12.0	1.18	1.18	4.42	5.22	-	12.00	3.4	14.4	2650	510	3860	13.0	11.9
16+16+71+71	0.92	0.92	4.08	4.08	-	10.00	2.3	11.2	2610	470	3280	13.1	12.0	1.10	1.10	4.90	4.90	-	12.00	3.4	14.4	2640	510	3900	13.0	11.9
16+20+20+20	1.60	2.00	2.00	2.00	-	7.60	2.3																			

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION														
	Cooling Capacity [kW]						Input Power [W]		Current [A]		Heating Capacity [kW]						Input Power [W]		Current [A]							
	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V
16+42+50+71	0.89	2.35	2.79	3.97	-	10.00	2.3	11.2	2610	470	3280	13.1	12.0	1.07	2.82	3.35	4.76	-	12.00	3.4	14.4	2620	540	3870	12.9	11.8
16+42+60+60	0.90	2.36	3.37	3.37	-	10.00	2.3	11.2	2610	470	3280	13.1	12.0	1.08	2.84	4.04	4.04	-	12.00	3.4	14.4	2630	530	3880	12.9	11.8
16+50+50+50	0.97	3.01	3.01	3.01	-	10.00	2.3	11.2	2570	520	3220	12.9	11.8	1.17	3.61	3.61	3.61	-	12.00	3.4	14.4	2660	630	3880	13.1	12.0
16+50+50+60	0.91	2.84	2.84	3.41	-	10.00	2.3	11.2	2570	520	3220	12.9	11.8	1.09	3.41	3.41	4.09	-	12.00	3.4	14.4	2660	630	3880	13.1	12.0
20+20+20+20	2.00	2.00	2.00	2.00	-	8.00	2.3	10.6	2050	310	3480	10.3	9.4	3.00	3.00	3.00	3.00	-	12.00	3.4	14.2	2750	340	4110	13.5	12.4
20+20+20+25	2.00	2.00	2.00	2.50	-	8.50	2.3	10.6	2230	310	3480	11.2	10.2	2.82	2.82	2.82	3.54	-	12.00	3.4	14.2	2750	340	4110	13.5	12.4
20+20+20+35	2.00	2.00	2.00	3.50	-	9.50	2.3	10.6	2690	320	3410	13.5	12.3	2.53	2.53	2.53	4.41	-	12.00	3.4	14.2	2730	350	4070	13.4	12.3
20+20+20+42	1.96	1.96	1.96	4.12	-	10.00	2.3	10.6	2920	320	3410	14.6	13.4	2.35	2.35	2.35	4.95	-	12.00	3.4	14.2	2720	360	4050	13.4	12.2
20+20+20+50	1.82	1.82	1.82	4.54	-	10.00	2.3	10.6	2730	380	3120	13.7	12.5	2.18	2.18	2.18	5.46	-	12.00	3.4	14.2	2660	420	3910	13.1	12.0
20+20+20+60	1.67	1.67	1.67	4.99	-	10.00	2.3	10.6	2730	380	3120	13.7	12.5	2.00	2.00	2.00	6.00	-	12.00	3.4	14.2	2660	420	3910	13.1	12.0
20+20+20+71	1.53	1.53	1.53	5.41	-	10.00	2.3	10.8	2730	390	3190	13.7	12.5	1.83	1.83	1.83	6.51	-	12.00	3.4	14.4	2650	420	3950	13.0	11.9
20+20+25+25	2.00	2.00	2.50	2.50	-	9.00	2.3	10.6	2460	310	3480	12.3	11.3	2.67	2.67	3.33	3.33	-	12.00	3.4	14.2	2750	340	4110	13.5	12.4
20+20+25+35	2.00	2.00	2.50	3.50	-	10.00	2.3	10.6	2920	320	3410	14.6	13.4	2.40	2.40	3.00	4.20	-	12.00	3.4	14.2	2730	350	4070	13.4	12.3
20+20+25+42	1.87	1.87	2.34	3.92	-	10.00	2.3	10.6	2920	320	3410	14.6	13.4	2.24	2.24	2.81	4.71	-	12.00	3.4	14.2	2720	360	4050	13.4	12.2
20+20+25+50	1.74	1.74	2.17	4.35	-	10.00	2.3	10.6	2730	380	3120	13.7	12.5	2.09	2.09	2.61	5.21	-	12.00	3.4	14.2	2660	420	3910	13.1	12.0
20+20+25+60	1.60	1.60	2.00	4.80	-	10.00	2.3	10.8	2730	380	3260	13.7	12.5	1.92	1.92	2.40	5.76	-	12.00	3.4	14.2	2660	420	3910	13.1	12.0
20+20+25+71	1.47	1.47	1.84	5.22	-	10.00	2.3	10.8	2730	390	3190	13.7	12.5	1.76	1.76	2.22	6.26	-	12.00	3.4	14.4	2650	420	3950	13.0	11.9
20+20+35+35	1.82	1.82	3.18	3.18	-	10.00	2.3	10.6	2860	320	3330	14.3	13.1	2.18	2.18	3.82	3.82	-	12.00	3.4	14.2	2700	370	3970	13.3	12.2
20+20+35+42	1.71	1.71	2.99	3.59	-	10.00	2.3	10.6	2860	320	3330	14.3	13.1	2.05	2.05	3.59	4.31	-	12.00	3.4	14.2	2690	370	3960	13.2	12.1
20+20+35+50	1.60	1.60	2.80	4.00	-	10.00	2.3	10.8	2730	390	3190	13.7	12.5	1.92	1.92	3.36	4.80	-	12.00	3.4	14.2	2640	420	3880	13.0	11.9
20+20+35+60	1.48	1.48	2.60	4.44	-	10.00	2.3	10.8	2730	390	3190	13.7	12.5	1.78	1.78	3.11	5.33	-	12.00	3.4	14.4	2640	420	3930	13.0	11.9
20+20+35+71	1.37	1.37	2.40	4.86	-	10.00	2.3	11.0	2660	390	3270	13.3	12.2	1.64	1.64	2.88	5.84	-	12.00	3.4	14.4	2630	430	3920	12.9	11.8
20+20+42+42	1.61	1.61	3.39	3.39	-	10.00	2.3	10.8	2860	340	3480	14.3	13.1	1.94	1.94	4.06	4.06	-	12.00	3.4	14.2	2680	370	3950	13.2	12.1
20+20+42+50	1.52	1.52	3.18	3.78	-	10.00	2.3	10.8	2730	390	3190	13.7	12.5	1.82	1.82	3.82	4.54	-	12.00	3.4	14.4	2630	430	3920	12.9	11.8
20+20+42+60	1.41	1.41	2.96	4.22	-	10.00	2.3	11.0	2730	390	3360	13.7	12.5	1.69	1.69	3.55	5.07	-	12.00	3.4	14.4	2630	430	3920	12.9	11.8
20+20+42+71	1.31	1.31	2.75	4.63	-	10.00	2.3	11.0	2660	390	3270	13.3	12.2	1.57	1.57	3.29	5.57	-	12.00	3.4	14.4	2620	440	3960	12.9	11.8
20+20+50+50	1.43	1.43	3.57	3.57	-	10.00	2.3	10.8	2610	440	3060	13.1	12.0	1.71	1.71	4.29	4.29	-	12.00	3.4	14.4	2640	510	3910	13.0	11.9
20+20+50+60	1.33	1.33	3.34	4.00	-	10.00	2.3	11.0	2610	440	3200	13.1	12.0	1.60	1.60	4.00	4.80	-	12.00	3.4	14.4	2640	510	3910	13.0	11.9
20+20+50+71	1.24	1.24	3.11	4.41	-	10.00	2.3	11.2	2610	470	3280	13.1	12.0	1.49	1.49	3.73	5.29	-	12.00	3.4	14.4	2630	520	3890	12.9	11.8
20+20+60+60	1.25	1.25	3.75	3.75	-	10.00	2.3	11.2	2610	440	3270	13.1	12.0	1.50	1.50	4.50	4.50	-	12.00	3.4	14.4	2640	510	3910	13.0	11.9
20+20+60+71	1.17	1.17	3.51	4.15	-	10.00	2.3	11.2	2610	470	3280	13.1	12.0	1.40	1.40	4.22	4.98	-	12.00	3.4	14.4	2630	520	3890	12.9	11.8
20+20+71+71	1.10	1.10	3.90	3.90	-	10.00	2.3	11.2	2620	480	3210	13.1	12.0	1.32	1.32	4.68	4.68	-	12.00	3.4	14.4	2630	530	3880	12.9	11.8
20+25+25+25	2.00	2.50	2.50	2.50	-	9.50	2.3	10.6	2690	310	3480	13.5	12.3	2.52	3.16	3.16	3.16	-	12.00	3.4	14.2	2750	340	4110	13.5	12.4
20+25+25+35	1.91	2.38	2.38	3.33	-	10.00	2.3	10.6	2920	320	3410	14.6	13.4	2.29	2.86	2.86	3.99	-	12.00	3.4	14.2	2730	350	4070	13.4	12.3
20+25+25+42	1.79	2.23	2.23	3.75	-	10.00	2.3	10.6	2920	320	3410	14.6	13.4	2.14	2.68	2.68	4.50	-	12.00	3.4	14.2	2720	360	4050	13.4	12.2
20+25+25+50	1.67	2.08	2.08	4.17	-	10.00	2.3	10.6	2730	380	3120	13.7	12.5	2.00	2.50	2.50	5.00	-	12.00	3.4	14.2	2660	420	3910	13.1	12.0
20+25+25+60	1.54	1.92	1.92	4.62	-	10.00	2.3	10.8	2730	380	3260	13.7	12.5	1.85	2.31	2.31	5.53	-	12.00	3.4	14.4	2660	420	3970	13.1	12.0
20+25+25+71	1.42	1.77	1.77	5.04	-	10.00	2.3	10.8	2730	390	3190	13.7	12.5	1.70	2.13	2.13	6.04	-	12.00	3.4	14.4	2650	420	3950	13.0	11.9
20+25+35+35	1.75	2.17	3.04	3.04	-	10.00	2.3	10.6	2860	320	3330	14.3	13.1	2.09	2.61	3.65	3.65	-	12.00	3.4	14.2	2700	370	3970	13.3	12.2
20+25+35+42	1.64	2.05	2.87	3.44	-	10.00	2.3	10.8	2860	320	3480	14.3	13.1	1.97	2.46	3.44	4.13	-	12.00	3.4	14.2	2690	370	3960	13.2	12.1
20+25+35+50	1.54	1.92	2.69	3.85	-	10.00	2.3	10.8	2730	390	3190	13.7	12.5	1.85	2.31	3.23	4.61	-	12.00	3.4	14.4	2640	420	3930	13.0	11.9
20+25+35+60	1.43	1.79	2.50	4.28	-	10.00	2.3	10.8	2730	390	3190	13.7	12.5	1.72	2.14	3.00	5.14	-	12.00	3.4	14.4	2640	420	3930	13.0	11.9
20+25+35+71	1.32	1.66	2.32	4.70	-	10.00	2.3	11.0	2660	390	3270	13.3	12.2	1.59	1.99	2.78	5.64	-	12.00	3.4	14.4	2630	430	3920	12.9	11.8
20+25+42+42	1.55	1.93	3.26	3.26	-	10.00	2.3	10.8	2860	340	3480	14.3	13.1	1.86	2.32	3.91	3.91	-	12.00	3.4	14.4	2680	370	4070	13.2	12.1
20+25+42+50	1.46	1.82	3.07	3.65	-	10.00	2.3	10.8	2730	390	3190	13.7	12.5	1.75	2.19	3.68	4.38	-	12.00	3.4	14.4	2630	430	3920	12.9	11.8
20+25+42+60	1.36	1.70	2.86	4.08	-	10.00	2.3	11.0	2730	390	3360	13.7	12.5	1.63	2.04	3.43	4.90	-	12.00	3.4	14.4	2630	430	3920	12.9	11.8
20+25+42+71	1.27	1.58	2.66	4.49	-	10.00	2.3	11.2	2660	390	3410	13.3	12.2	1.52	1.90	3.19	5.39	-	12.00	3.4	14.4	2620	440	3960	12.9	11.8
20+25+50+50	1.38	1.72	3.45	3.45	-	10.00	2.3	11.0	2610	440	3200	13.1	12.0	1.66	2.06	4.14	4.14	-	12.00	3.4	14.4	2640	510	3910	13.0	11.9
20+25+50+60	1.29	1.61	3.23	3.87	-	10.00	2.3	11.0	2610	440	3200	13.1	12.0	1												

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION																				
	Cooling Capacity [kW]						Input Power [W]					Current [A]					Heating Capacity [kW]						Input Power [W]					Current [A]				
	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V						
35+35+35+60	2.12	2.12	2.12	3.64	-	10.00	2.3	11.2	2660	390	3410	13.3	12.2	2.55	2.55	2.55	4.35	-	12.00	3.4	14.4	2650	460	3930	13.0	11.9						

• Specification based on JIS C 9612 standard.
• A minimum of 2 indoor units must be connected.

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION																				
	Cooling Capacity [kW]						Input Power [W]					Current [A]					Heating Capacity [kW]						Input Power [W]					Current [A]				
	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V						
16+16+20+25+50	1.26	1.26	1.57	1.97	3.94	10.00	2.3	11.5	2560	510	3380	12.6	11.6	1.51	1.51	1.90	2.36	4.72	12.00	3.4	14.5	2770	710	3930	13.1	12.1						

• Specification based on JIS C 9612 standard.
• A minimum of 2 indoor units must be connected.

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION														
	Cooling Capacity [kW]						Input Power [W]		Current [A]		Heating Capacity [kW]						Input Power [W]		Current [A]							
	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V
16+20+20+25+25	1.50	1.89	1.89	2.36	2.36	10.00	2.3	11.5	2600	420	3590	12.8	11.8	1.82	2.26	2.26	2.83	2.83	12.00	3.4	14.5	2770	570	4030	13.1	12.1
16+20+20+25+35	1.38	1.72	1.72	2.16	3.02	10.00	2.3	11.5	2600	430	3510	12.8	11.8	1.66	2.07	2.07	2.59	3.61	12.00	3.4	14.5	2750	600	4000	13.0	12.0
16+20+20+25+42	1.30	1.63	1.63	2.03	3.41	10.00	2.3	11.5	2540	430	3510	12.5	11.5	1.56	1.95	1.95	2.44	4.10	12.00	3.4	14.5	2740	610	3990	13.0	12.0
16+20+20+25+50	1.22	1.53	1.53	1.91	3.81	10.00	2.3	11.5	2560	510	3380	12.6	11.6	1.47	1.83	1.83	2.29	4.58	12.00	3.4	14.5	2760	720	3920	13.1	12.1
16+20+20+25+60	1.13	1.42	1.42	1.77	4.26	10.00	2.3	11.5	2560	510	3380	12.6	11.6	1.36	1.70	1.70	2.13	5.11	12.00	3.4	14.5	2760	720	3920	13.1	12.1
16+20+20+25+71	1.05	1.32	1.32	1.64	4.67	10.00	2.3	11.5	2500	520	3380	12.3	11.4	1.26	1.58	1.58	1.97	5.61	12.00	3.4	14.5	2750	730	3970	13.0	12.0
16+20+20+35+35	1.26	1.59	1.59	2.78	2.78	10.00	2.3	11.5	2540	440	3510	12.5	11.5	1.52	1.90	1.90	3.34	3.34	12.00	3.4	14.5	2730	630	3970	12.9	11.9
16+20+20+35+42	1.21	1.50	1.50	2.63	3.16	10.00	2.3	11.5	2540	440	3520	12.5	11.5	1.45	1.80	1.80	3.16	3.79	12.00	3.4	14.5	2770	640	3960	13.1	12.1
16+20+20+35+50	1.13	1.42	1.42	2.48	3.55	10.00	2.3	11.5	2560	520	3380	12.6	11.6	1.36	1.70	1.70	2.98	4.26	12.00	3.4	14.5	2790	750	3950	13.2	12.2
16+20+20+35+60	1.07	1.32	1.32	2.32	3.97	10.00	2.3	11.5	2560	520	3380	12.6	11.6	1.27	1.59	1.59	2.78	4.77	12.00	3.4	14.5	2790	750	3950	13.2	12.2
16+20+20+35+71	1.00	1.23	1.23	2.16	4.38	10.00	2.3	11.5	2510	550	3390	12.4	11.4	1.19	1.48	1.48	2.59	5.26	12.00	3.4	14.5	2780	760	3940	13.1	12.1
16+20+20+42+42	1.14	1.43	1.43	3.00	3.00	10.00	2.3	11.5	2550	460	3520	12.5	11.6	1.38	1.71	1.71	3.60	3.60	12.00	3.4	14.5	2760	640	3950	13.1	12.1
16+20+20+42+50	1.08	1.35	1.35	2.84	3.38	10.00	2.3	11.5	2500	520	3380	12.3	11.4	1.30	1.62	1.62	3.41	4.05	12.00	3.4	14.5	2790	760	3950	13.2	12.2
16+20+20+42+60	1.01	1.27	1.27	2.66	3.79	10.00	2.3	11.5	2500	520	3380	12.3	11.4	1.22	1.52	1.52	3.19	4.55	12.00	3.4	14.5	2790	760	3950	13.2	12.2
16+20+20+42+71	0.95	1.18	1.18	2.49	4.20	10.00	2.3	11.5	2510	560	3390	12.3	11.4	1.14	1.42	1.42	2.98	5.04	12.00	3.4	14.5	2780	780	3930	13.1	12.1
16+20+20+50+50	1.02	1.28	1.28	3.21	3.21	10.00	2.3	11.5	2530	610	3330	12.4	11.5	1.22	1.54	1.54	3.85	3.85	12.00	3.4	14.5	2870	890	3960	13.6	12.6
16+20+20+50+60	0.96	1.21	1.21	3.01	3.61	10.00	2.3	11.5	2530	610	3330	12.4	11.5	1.16	1.45	1.45	3.61	4.33	12.00	3.4	14.5	2870	890	3960	13.6	12.6
16+20+20+50+71	0.90	1.13	1.13	2.82	4.02	10.00	2.3	11.5	2530	650	3340	12.4	11.5	1.08	1.36	1.36	3.39	4.81	12.00	3.4	14.5	2860	900	4000	13.5	12.5
16+20+20+60+60	0.90	1.14	1.14	3.41	3.41	10.00	2.3	11.5	2530	610	3330	12.4	11.5	1.10	1.36	1.36	4.09	4.09	12.00	3.4	14.5	2870	890	3960	13.6	12.6
16+20+25+25+25	1.45	1.80	2.25	2.25	2.25	10.00	2.3	11.5	2600	420	3590	12.8	11.8	1.74	2.16	2.70	2.70	2.70	12.00	3.4	14.5	2770	570	4030	13.1	12.1
16+20+25+25+35	1.32	1.65	2.07	2.07	2.89	10.00	2.3	11.5	2600	430	3510	12.8	11.8	1.59	1.98	2.48	2.48	3.47	12.00	3.4	14.5	2750	600	4000	13.0	12.0
16+20+25+25+42	1.26	1.56	1.95	1.95	3.28	10.00	2.3	11.5	2540	430	3510	12.5	11.5	1.50	1.88	2.34	2.34	3.94	12.00	3.4	14.5	2740	610	3990	13.0	12.0
16+20+25+25+50	1.18	1.47	1.84	1.84	3.67	10.00	2.3	11.5	2560	510	3380	12.6	11.6	1.41	1.76	2.21	2.21	4.41	12.00	3.4	14.5	2760	720	3920	13.1	12.1
16+20+25+25+60	1.10	1.37	1.71	1.71	4.11	10.00	2.3	11.5	2560	510	3380	12.6	11.6	1.33	1.64	2.05	2.05	4.93	12.00	3.4	14.5	2760	720	3920	13.1	12.1
16+20+25+25+71	1.03	1.27	1.59	1.59	4.52	10.00	2.3	11.5	2500	520	3380	12.3	11.4	1.22	1.53	1.91	1.91	5.43	12.00	3.4	14.5	2750	730	3970	13.0	12.0
16+20+25+35+35	1.22	1.53	1.91	2.67	2.67	10.00	2.3	11.5	2540	440	3510	12.5	11.5	1.47	1.83	2.28	3.21	3.21	12.00	3.4	14.5	2730	630	3970	12.9	11.9
16+20+25+35+42	1.16	1.45	1.81	2.54	3.04	10.00	2.3	11.5	2540	440	3520	12.5	11.5	1.40	1.74	2.17	3.04	3.65	12.00	3.4	14.5	2770	640	3960	13.1	12.1
16+20+25+35+50	1.10	1.37	1.71	2.40	3.42	10.00	2.3	11.5	2560	520	3380	12.6	11.6	1.32	1.64	2.05	2.88	4.11	12.00	3.4	14.5	2790	750	3950	13.2	12.2
16+20+25+35+60	1.03	1.28	1.60	2.24	3.85	10.00	2.3	11.5	2560	520	3380	12.6	11.6	1.23	1.54	1.92	2.69	4.62	12.00	3.4	14.5	2790	750	3950	13.2	12.2
16+20+25+35+71	0.96	1.20	1.50	2.10	4.24	10.00	2.3	11.5	2510	550	3390	12.3	11.4	1.15	1.44	1.80	2.51	5.10	12.00	3.4	14.5	2780	760	3940	13.1	12.1
16+20+25+42+42	1.10	1.38	1.72	2.90	2.90	10.00	2.3	11.5	2550	460	3520	12.5	11.6	1.32	1.66	2.06	3.48	3.48	12.00	3.4	14.5	2760	640	3950	13.1	12.1
16+20+25+42+50	1.05	1.31	1.63	2.75	3.26	10.00	2.3	11.5	2500	520	3380	12.3	11.4	1.26	1.57	1.96	3.92	3.92	12.00	3.4	14.5	2790	760	3950	13.2	12.2
16+20+25+42+60	0.98	1.23	1.53	2.58	3.68	10.00	2.3	11.5	2500	520	3380	12.3	11.4	1.18	1.47	1.84	3.09	4.42	12.00	3.4	14.5	2790	760	3950	13.2	12.2
16+20+25+42+71	0.92	1.15	1.44	2.41	4.08	10.00	2.3	11.5	2510	560	3390	12.3	11.4	1.10	1.38	1.72	2.90	4.90	12.00	3.4	14.5	2780	780	3930	13.1	12.1
16+20+25+50+50	0.99	1.24	1.55	3.11	3.11	10.00	2.3	11.5	2530	610	3330	12.4	11.5	1.19	1.49	1.86	3.73	3.73	12.00	3.4	14.5	2870	890	3960	13.6	12.6
16+20+25+50+60	0.94	1.17	1.46	2.92	3.51	10.00	2.3	11.5	2530	610	3330	12.4	11.5	1.13	1.40	1.75	3.51	4.21	12.00	3.4	14.5	2870	890	3960	13.6	12.6
16+20+25+50+71	0.88	1.10	1.37	2.75	3.90	10.00	2.3	11.5	2530	650	3340	12.4	11.5	1.05	1.32	1.65	3.30	4.68	12.00	3.4	14.5	2860	900	4000	13.5	12.5
16+20+25+60+60	0.88	1.10	1.38	3.32	3.32	10.00	2.3	11.5	2530	610	3330	12.4	11.5	1.06	1.33	1.65	3.98	3.98	12.00	3.4	14.5	2870	890	3960	13.6	12.6
16+20+35+35+35	1.14	1.42	2.48	2.48	2.48	10.00	2.3	11.5	2550	470	3440	12.5	11.6	1.36	1.70	2.98	2.98	2.98	12.00	3.4	14.5	2760	650	3940	13.1	12.1
16+20+35+35+42	1.09	1.35	2.36	2.36	2.84	10.00	2.3	11.5	2550	470	3440	12.5	11.6	1.30	1.62	2.84	2.84	3.40	12.00	3.4	14.5	2750	650	3980	13.0	12.0
16+20+35+35+50	1.03	1.28	2.24	2.24	3.21	10.00	2.3	11.5	2510	550	3390	12.3	11.4	1.23	1.54	2.69	2.69	3.85	12.00	3.4	14.5	2780	780	3930	13.1	12.1
16+20+35+35+60	0.97	1.20	2.11	2.11	3.61	10.00	2.3	11.5	2510	550	3390	12.3	11.4	1.16	1.45	2.53	2.53	4.33	12.00	3.4	14.5	2780	780	3930	13.1	12.1
16+20+35+35+71	0.90	1.13	1.98	1.98	4.01	10.00	2.3	11.5	2510	560	3390	12.3	11.4	1.09	1.36	2.37	2.37	4.81	12.00	3.4	14.5	2810	790	3970	13.3	12.3
16+20+35+42+42	1.03	1.29	2.26	2.71	2.71	10.00	2.3	11.5	2550	470	3440	12.5	11.6	1.24	1.55	2.71	3.25	3.25	12.00	3.4	14.5	2740	670	3970	13.0	12.0
16+20+35+42+50	0.98	1.23	2.15	2.58	3.06	10.00	2.3	11.5	2510	550	3390	12.3	11.4	1.18	1.47	2.58	3.09	3.68	12.00	3.4	14.5	2820	790	3980	13.3	12.3
16+20+35+42+60	0.92	1.16	2.02	2.43	3.47	10.00	2.3	11.5	2510	550	3390	12.3	11.4	1.11	1.39	2.43	2.91	4.16	12.00	3.4	14.5	2820	790	3980	13.3	12.3
16+20+35+50+50	0.94	1.17	2.05	2.92	2.92	10.00	2.3	11.5	2530	620																

CU-5Z100WBH-8: Only Wall-Mounted Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION														
	Cooling Capacity [kW]						Input Power [W]		Current [A]		Heating Capacity [kW]						Input Power [W]		Current [A]							
	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V
20+20+25+25+60	1.33	1.33	1.67	1.67	4.00	10.00	2.3	11.5	2560	510	3380	12.6	11.6	1.60	1.60	2.00	2.00	4.80	12.00	3.4	14.5	2760	720	3970	13.1	12.1
20+20+25+25+71	1.24	1.24	1.55	1.55	4.42	10.00	2.3	11.5	2500	520	3380	12.3	11.4	1.49	1.49	1.86	1.86	5.30	12.00	3.4	14.5	2790	750	3960	13.2	12.2
20+20+25+35+35	1.48	1.48	1.86	2.59	2.59	10.00	2.3	11.5	2550	460	3520	12.5	11.6	1.78	1.78	2.22	3.11	3.11	12.00	3.4	14.5	2770	640	3960	13.1	12.1
20+20+25+35+42	1.41	1.41	1.76	2.46	2.96	10.00	2.3	11.5	2550	460	3520	12.5	11.6	1.69	1.69	2.11	2.96	3.55	12.00	3.4	14.5	2760	640	3950	13.1	12.1
20+20+25+35+50	1.33	1.33	1.68	2.33	3.33	10.00	2.3	11.5	2500	520	3380	12.3	11.4	1.60	1.60	2.00	2.80	4.00	12.00	3.4	14.5	2790	760	3950	13.2	12.2
20+20+25+35+60	1.25	1.25	1.56	2.19	3.75	10.00	2.3	11.5	2500	520	3380	12.3	11.4	1.50	1.50	1.88	2.63	4.49	12.00	3.4	14.5	2790	760	3950	13.2	12.2
20+20+25+35+71	1.17	1.17	1.46	2.05	4.15	10.00	2.3	11.5	2510	560	3390	12.3	11.4	1.40	1.40	1.76	2.46	4.98	12.00	3.4	14.5	2780	780	3930	13.1	12.2
20+20+25+42+42	1.34	1.34	1.68	2.82	2.82	10.00	2.3	11.5	2550	470	3520	12.5	11.6	1.61	1.61	2.02	3.38	3.38	12.00	3.4	14.5	2760	650	3930	13.1	12.1
20+20+25+42+50	1.27	1.27	1.60	2.68	3.18	10.00	2.3	11.5	2500	520	3380	12.3	11.4	1.53	1.53	1.91	3.21	3.82	12.00	3.4	14.5	2780	760	3940	13.1	12.2
20+20+25+42+60	1.20	1.20	1.50	2.51	3.59	10.00	2.3	11.5	2500	520	3380	12.3	11.4	1.44	1.44	1.80	3.02	4.30	12.00	3.4	14.5	2780	760	3940	13.1	12.2
20+20+25+42+71	1.12	1.12	1.41	2.36	3.99	10.00	2.3	11.5	2510	560	3390	12.3	11.4	1.35	1.35	1.69	2.83	4.78	12.00	3.4	14.5	2780	780	3980	13.1	12.2
20+20+25+50+50	1.21	1.21	1.52	3.03	3.03	10.00	2.3	11.5	2530	610	3330	12.4	11.5	1.45	1.45	1.82	3.64	3.64	12.00	3.4	14.5	2870	900	4010	13.6	12.6
20+20+25+50+60	1.14	1.14	1.43	2.86	3.43	10.00	2.3	11.5	2530	610	3330	12.4	11.5	1.37	1.37	1.72	3.43	4.11	12.00	3.4	14.5	2870	900	4010	13.6	12.6
20+20+35+35+35	1.37	1.37	2.42	2.42	2.42	10.00	2.3	11.5	2550	470	3440	12.5	11.6	1.65	1.65	2.90	2.90	2.90	12.00	3.4	14.5	2750	650	3980	13.0	12.0
20+20+35+35+42	1.32	1.32	2.30	2.30	2.76	10.00	2.3	11.5	2550	470	3440	12.5	11.6	1.58	1.58	2.76	2.76	3.32	12.00	3.4	14.5	2740	670	3970	13.0	12.0
20+20+35+35+50	1.25	1.25	2.19	2.19	3.12	10.00	2.3	11.5	2510	550	3390	12.3	11.4	1.50	1.50	2.63	2.63	3.74	12.00	3.4	14.5	2820	790	3980	13.3	12.3
20+20+35+35+60	1.18	1.18	2.06	2.06	3.52	10.00	2.3	11.5	2510	550	3390	12.3	11.4	1.41	1.41	2.47	2.47	4.24	12.00	3.4	14.5	2820	790	3980	13.3	12.3
20+20+35+35+71	1.11	1.11	1.93	1.93	3.92	10.00	2.3	11.5	2510	550	3390	12.3	11.4	1.33	1.33	2.32	2.32	4.70	12.00	3.4	14.5	2810	800	3960	13.3	12.3
20+20+35+42+42	1.26	1.26	2.20	2.64	2.64	10.00	2.3	11.5	2550	470	3450	12.5	11.6	1.51	1.51	2.64	3.17	3.17	12.00	3.4	14.5	2740	680	3960	13.0	12.0
20+20+35+42+50	1.20	1.20	2.10	2.51	2.99	10.00	2.3	11.5	2510	560	3390	12.3	11.4	1.44	1.44	2.51	3.02	3.59	12.00	3.4	14.5	2810	800	3970	13.3	12.3
20+20+35+42+60	1.13	1.13	1.98	2.37	3.39	10.00	2.3	11.5	2510	560	3390	12.3	11.4	1.36	1.36	2.37	2.85	4.06	12.00	3.4	14.5	2810	800	3970	13.3	12.3
20+20+35+50+50	1.14	1.14	2.00	2.86	2.86	10.00	2.3	11.5	2540	650	3340	12.5	11.5	1.37	1.37	2.40	3.43	3.43	12.00	3.4	14.5	2900	940	3990	13.7	12.7
20+20+42+42+42	1.19	1.19	2.54	2.54	2.54	10.00	2.3	11.5	2550	470	3450	12.5	11.6	1.44	1.44	3.04	3.04	3.04	12.00	3.4	14.5	2780	680	3950	13.1	12.2
20+20+42+42+50	1.15	1.15	2.41	2.41	2.88	10.00	2.3	11.5	2510	560	3390	12.3	11.4	1.38	1.38	2.90	2.90	3.44	12.00	3.4	14.5	2810	810	3960	13.3	12.3
20+20+42+50+50	1.10	1.10	2.30	2.75	2.75	10.00	2.3	11.5	2540	650	3340	12.5	11.5	1.32	1.32	2.76	3.30	3.30	12.00	3.4	14.5	2900	950	4030	13.7	12.7
20+25+25+25+25	1.68	2.08	2.08	2.08	2.08	10.00	2.3	11.5	2600	430	3590	12.8	11.8	2.00	2.50	2.50	2.50	2.50	12.00	3.4	14.5	2760	580	4020	13.1	12.1
20+25+25+25+35	1.55	1.92	1.92	1.92	2.69	10.00	2.3	11.5	2540	430	3510	12.5	11.5	1.85	2.31	2.31	2.31	3.22	12.00	3.4	14.5	2740	610	3990	13.0	12.0
20+25+25+25+42	1.47	1.82	1.82	1.82	3.07	10.00	2.3	11.5	2540	430	3510	12.5	11.5	1.75	2.19	2.19	2.19	3.68	12.00	3.4	14.5	2730	610	3980	12.9	11.9
20+25+25+25+50	1.39	1.72	1.72	1.72	3.45	10.00	2.3	11.5	2560	510	3380	12.6	11.6	1.66	2.07	2.07	2.07	4.13	12.00	3.4	14.5	2760	720	3970	13.1	12.1
20+25+25+25+60	1.30	1.61	1.61	1.61	3.87	10.00	2.3	11.5	2560	510	3380	12.6	11.6	1.54	1.94	1.94	1.94	4.64	12.00	3.4	14.5	2760	720	3970	13.1	12.1
20+25+25+25+71	1.20	1.51	1.51	1.51	4.27	10.00	2.3	11.5	2500	520	3380	12.3	11.4	1.45	1.81	1.81	1.81	5.12	12.00	3.4	14.5	2790	750	3960	13.2	12.2
20+25+25+35+35	1.42	1.79	1.79	2.50	2.50	10.00	2.3	11.5	2550	460	3520	12.5	11.6	1.72	2.14	2.14	3.00	3.00	12.00	3.4	14.5	2770	640	3960	13.1	12.1
20+25+25+35+42	1.36	1.70	1.70	2.38	2.86	10.00	2.3	11.5	2550	460	3520	12.5	11.6	1.63	2.04	2.04	2.86	3.43	12.00	3.4	14.5	2760	640	3950	13.1	12.1
20+25+25+35+50	1.29	1.61	1.61	2.26	3.23	10.00	2.3	11.5	2500	520	3380	12.3	11.4	1.55	1.94	1.94	2.71	3.86	12.00	3.4	14.5	2790	760	3950	13.2	12.2
20+25+25+35+60	1.21	1.52	1.52	2.12	3.63	10.00	2.3	11.5	2500	520	3380	12.3	11.4	1.45	1.82	1.82	2.55	4.36	12.00	3.4	14.5	2790	760	3950	13.2	12.2
20+25+25+35+71	1.14	1.42	1.42	1.99	4.03	10.00	2.3	11.5	2510	560	3390	12.3	11.4	1.37	1.70	1.70	2.39	4.84	12.00	3.4	14.5	2780	780	3930	13.1	12.2
20+25+25+42+42	1.30	1.62	1.62	2.73	2.73	10.00	2.3	11.5	2550	470	3520	12.5	11.6	1.56	1.95	1.95	3.27	3.27	12.00	3.4	14.5	2760	650	3930	13.1	12.1
20+25+25+42+50	1.24	1.54	1.54	2.59	3.09	10.00	2.3	11.5	2500	520	3380	12.3	11.4	1.49	1.85	1.85	3.11	3.70	12.00	3.4	14.5	2780	760	3940	13.1	12.2
20+25+25+42+60	1.17	1.45	1.45	2.44	3.49	10.00	2.3	11.5	2500	520	3380	12.3	11.4	1.40	1.74	1.74	2.93	4.19	12.00	3.4	14.5	2780	760	3940	13.1	12.2
20+25+25+42+71	1.09	1.37	1.37	2.30	3.87	10.00	2.3	11.5	2510	560	3390	12.3	11.4	1.31	1.64	1.64	2.75	4.66	12.00	3.4	14.5	2780	780	3980	13.1	12.2
20+25+25+50+50	1.18	1.47	1.47	2.94	2.94	10.00	2.3	11.5	2530	610	3330	12.4	11.5	1.42	1.76	1.76	3.53	3.53	12.00	3.4	14.5	2870	900	4010	13.6	12.6
20+25+25+50+60	1.11	1.39	1.39	2.78	3.33	10.00	2.3	11.5	2530	610	3330	12.4	11.5	1.33	1.67	1.67	3.33	4.00	12.00	3.4	14.5	2870	900	4010	13.6	12.6
20+25+35+35+35	1.34	1.67	2.33	2.33	2.33	10.00	2.3	11.5	2550	470	3440	12.5	11.6	1.60	2.00	2.80	2.80	2.80	12.00	3.4	14.5	2750	650	3980	13.0	12.0
20+25+35+35+42	1.27	1.59	2.23	2.23	2.68	10.00	2.3	11.5	2550	470	3440	12.5	11.6	1.53	1.91	2.68	2.68	3.20	12.00	3.4	14.5	2740	670	3970	13.0	12.0
20+25+35+35+50	1.21	1.52	2.12	2.12	3.03	10.00	2.3	11.5	2510	550	3390	12.3	11.4	1.45	1.82	2.55	2.55	3.63	12.00	3.4	14.5	2820	790	3980	13.3	12.3
20+25+35+35+60	1.14	1.43	2.00	2.00	3.43	10.00	2.3	11.5	2510	550	3390	12.3	11.4	1.38	1.71	2.40	2.40	4.11	12.00	3.4	14.5	2820	790	3980	13.3	12.3
20+25+35+42+42	1.23	1.52	2.13	2.56	2.56	10.00	2.3	11.5	2550	470	3450	12.5														

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION										HEATING OPERATION											
	Cooling Capacity [kW]					Input Power [W]		Current [A]		Heating Capacity [kW]					Input Power [W]		Current [A]					
	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min ~ max	Rated	min ~ max	220V	240V
25+50	2.50	5.00	-	-	-	7.50	2.3 ~ 8.6	2350	240 ~ 3110	11.8	10.8	3.47	6.93	-	-	-	10.40	2.0 ~ 11.0	2880	160 ~ 3180	14.1	13.0
25+60	2.50	6.00	-	-	-	8.50	2.3 ~ 9.1	3040	240 ~ 3390	15.2	13.9	3.53	8.47	-	-	-	12.00	2.0 ~ 13.0	3330	160 ~ 4180	16.4	15.0
25+71	2.50	7.10	-	-	-	9.60	2.3 ~ 10.1	3630	260 ~ 4280	18.2	16.7	3.13	8.87	-	-	-	12.00	2.0 ~ 13.0	3310	160 ~ 4170	16.3	14.9
35+35	3.50	3.50	-	-	-	7.00	2.3 ~ 8.1	2350	250 ~ 3160	11.8	10.8	4.50	4.50	-	-	-	9.00	2.0 ~ 11.0	2650	200 ~ 3420	13.0	11.9
35+42	3.50	4.20	-	-	-	7.70	2.3 ~ 8.6	2770	250 ~ 3650	13.9	12.7	4.59	5.51	-	-	-	10.10	2.0 ~ 11.0	3000	200 ~ 3360	14.7	13.5
35+50	3.50	5.00	-	-	-	8.50	2.3 ~ 9.1	2910	230 ~ 3260	14.6	13.3	4.65	6.65	-	-	-	11.30	2.0 ~ 13.0	2960	160 ~ 4160	14.5	13.3
35+60	3.50	6.00	-	-	-	9.50	2.3 ~ 10.1	3670	230 ~ 4280	18.4	16.8	4.42	7.58	-	-	-	12.00	2.0 ~ 13.0	3250	160 ~ 4160	16.0	14.6
35+71	3.30	6.70	-	-	-	10.00	2.3 ~ 10.4	3920	260 ~ 4440	19.6	18.0	3.96	8.04	-	-	-	12.00	2.0 ~ 13.8	3240	160 ~ 4510	15.9	14.6
42+42	4.20	4.20	-	-	-	8.40	2.3 ~ 9.1	3440	250 ~ 4060	17.2	15.8	5.60	5.60	-	-	-	11.20	2.0 ~ 13.0	3140	190 ~ 4350	15.4	14.1
42+50	4.20	5.00	-	-	-	9.20	2.3 ~ 10.0	3330	230 ~ 4130	16.7	15.3	5.48	6.52	-	-	-	12.00	2.0 ~ 13.0	3240	160 ~ 4090	15.9	14.6
42+60	4.12	5.88	-	-	-	10.00	2.3 ~ 10.4	4130	230 ~ 4430	20.7	18.9	4.94	7.06	-	-	-	12.00	2.0 ~ 13.8	3240	160 ~ 4510	15.9	14.6
42+71	3.72	6.28	-	-	-	10.00	2.3 ~ 10.4	3850	260 ~ 4440	19.3	17.7	4.46	7.54	-	-	-	12.00	2.0 ~ 13.8	3230	160 ~ 4500	15.9	14.5
50+50	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3370	250 ~ 3710	16.9	15.5	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	3030	170 ~ 4260	14.9	13.6
50+60	4.55	5.45	-	-	-	10.00	2.3 ~ 10.4	3370	250 ~ 3710	16.9	15.5	5.45	6.55	-	-	-	12.00	2.0 ~ 13.8	3030	170 ~ 4260	14.9	13.6
50+71	4.13	5.87	-	-	-	10.00	2.3 ~ 10.4	3230	250 ~ 3580	16.2	14.8	4.96	7.04	-	-	-	12.00	2.0 ~ 13.8	3010	170 ~ 4240	14.8	13.6
60+60	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3370	250 ~ 3710	16.9	15.5	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	3030	170 ~ 4260	14.9	13.6
60+71	4.58	5.42	-	-	-	10.00	2.3 ~ 10.4	3230	250 ~ 3580	16.2	14.8	5.50	6.50	-	-	-	12.00	2.0 ~ 13.8	3010	170 ~ 4240	14.8	13.6
71+71	5.00	5.00	-	-	-	10.00	2.3 ~ 10.4	3100	280 ~ 3440	15.5	14.2	6.00	6.00	-	-	-	12.00	2.0 ~ 13.8	3000	180 ~ 4220	14.7	13.5
16+16+16	1.60	1.60	1.60	-	-	4.80	2.3 ~ 8.5	1140	260 ~ 2770	5.8	5.3	2.60	2.60	2.60	-	-	7.80	2.7 ~ 12.3	2100	230 ~ 3820	10.3	9.5
16+16+20	1.60	1.60	2.00	-	-	5.20	2.3 ~ 8.5	1250	260 ~ 2770	6.3	5.8	2.58	2.58	3.24	-	-	8.40	2.7 ~ 12.3	2320	230 ~ 3800	11.4	10.4
16+16+25	1.60	1.60	2.50	-	-	5.70	2.3 ~ 8.5	1440	260 ~ 2770	7.3	6.7	2.47	2.47	3.86	-	-	8.80	2.7 ~ 12.3	2390	230 ~ 3800	11.7	10.8
16+16+35	1.60	1.60	3.50	-	-	6.70	2.3 ~ 8.5	1760	260 ~ 2700	8.8	8.1	2.32	2.32	5.06	-	-	9.70	2.7 ~ 12.3	2700	230 ~ 3720	13.3	12.2
16+16+42	1.60	1.60	4.20	-	-	7.40	2.3 ~ 8.5	2100	250 ~ 2640	10.5	9.6	2.34	2.34	6.12	-	-	10.80	2.7 ~ 12.3	2830	230 ~ 3700	13.9	12.7
16+16+50	1.60	1.60	5.00	-	-	8.20	2.3 ~ 8.7	2260	280 ~ 2440	11.3	10.4	2.34	2.34	7.32	-	-	12.00	2.7 ~ 12.9	3050	250 ~ 3790	15.0	13.7
16+16+60	1.60	1.60	6.00	-	-	9.20	2.3 ~ 10.1	2600	280 ~ 3150	13.0	11.9	2.09	2.09	7.82	-	-	12.00	2.7 ~ 13.6	3050	250 ~ 4150	15.0	13.7
16+16+71	1.55	1.55	6.90	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	1.86	1.86	8.28	-	-	12.00	2.7 ~ 13.6	3040	250 ~ 4070	14.9	13.7
16+20+20	1.60	2.00	2.00	-	-	5.60	2.3 ~ 8.5	1390	260 ~ 2700	7.0	6.4	2.58	3.21	3.21	-	-	9.00	2.7 ~ 12.3	2430	230 ~ 3790	11.9	10.9
16+20+25	1.60	2.00	2.50	-	-	6.10	2.3 ~ 8.5	1600	260 ~ 2700	8.1	7.4	2.47	3.08	3.85	-	-	9.40	2.7 ~ 12.3	2570	230 ~ 3790	12.6	11.6
16+20+35	1.60	2.00	3.50	-	-	7.10	2.3 ~ 8.5	1930	250 ~ 2640	9.7	8.9	2.32	2.90	5.08	-	-	10.30	2.7 ~ 12.3	2730	230 ~ 3700	13.4	12.3
16+20+42	1.60	2.00	4.20	-	-	7.80	2.3 ~ 8.5	2210	250 ~ 2640	11.1	10.1	2.34	2.92	6.14	-	-	11.40	2.7 ~ 12.9	2970	230 ~ 3980	14.6	13.4
16+20+50	1.60	2.00	5.00	-	-	8.60	2.3 ~ 9.6	2450	280 ~ 2770	12.3	11.2	2.23	2.79	6.98	-	-	12.00	2.7 ~ 13.6	3040	250 ~ 4070	14.9	13.7
16+20+60	1.60	2.00	6.00	-	-	9.60	2.3 ~ 10.1	2770	280 ~ 3090	13.9	12.7	2.00	2.50	7.50	-	-	12.00	2.7 ~ 13.6	3040	250 ~ 4070	14.9	13.7
16+20+71	1.50	1.87	6.63	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	1.80	2.24	7.96	-	-	12.00	2.7 ~ 13.8	3030	250 ~ 4180	14.9	13.6
16+25+25	1.60	2.50	2.50	-	-	6.60	2.3 ~ 8.5	1810	260 ~ 2700	9.1	8.3	2.38	3.71	3.71	-	-	9.80	2.7 ~ 12.3	2770	230 ~ 3790	13.6	12.5
16+25+35	1.60	2.50	3.50	-	-	7.60	2.3 ~ 8.5	2210	250 ~ 2640	11.1	10.1	2.25	3.52	4.93	-	-	10.70	2.7 ~ 12.3	2870	230 ~ 3700	14.1	12.9
16+25+42	1.60	2.50	4.20	-	-	8.30	2.3 ~ 8.7	2510	250 ~ 2690	12.6	11.5	2.28	3.55	5.97	-	-	11.80	2.7 ~ 12.9	3110	230 ~ 3980	15.3	14.0
16+25+50	1.60	2.50	5.00	-	-	9.10	2.3 ~ 10.1	2540	280 ~ 3090	12.7	11.7	2.11	3.30	6.59	-	-	12.00	2.7 ~ 13.6	3040	250 ~ 4070	14.9	13.7
16+25+60	1.58	2.48	5.94	-	-	10.00	2.3 ~ 10.7	3020	280 ~ 3630	15.1	13.9	1.90	2.97	7.13	-	-	12.00	2.7 ~ 13.6	3040	250 ~ 4070	14.9	13.7
16+25+71	1.43	2.23	6.34	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	1.71	2.68	7.61	-	-	12.00	2.7 ~ 13.6	3030	250 ~ 4180	14.9	13.6
16+35+35	1.60	3.50	3.50	-	-	8.60	2.3 ~ 9.6	2640	250 ~ 3080	13.2	12.1	2.16	4.72	4.72	-	-	11.60	2.7 ~ 13.6	3000	230 ~ 4320	14.7	13.5
16+35+42	1.60	3.50	4.20	-	-	9.30	2.3 ~ 10.1	2920	250 ~ 3480	14.6	13.4	2.06	4.52	5.42	-	-	12.00	2.7 ~ 13.6	3130	240 ~ 4310	15.4	14.1
16+35+50	1.58	3.47	4.95	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	1.90	4.16	5.94	-	-	12.00	2.7 ~ 13.6	2960	250 ~ 4040	14.5	13.3
16+35+60	1.44	3.15	5.41	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	1.73	3.78	6.49	-	-	12.00	2.7 ~ 13.8	2960	250 ~ 4160	14.5	13.3
16+35+71	1.31	2.87	5.82	-	-	10.00	2.3 ~ 10.7	2890	280 ~ 3350	14.5	13.3	1.58	3.44	6.98	-	-	12.00	2.7 ~ 13.8	2950	270 ~ 4140	14.5	13.3
16+42+42	1.60	4.20	4.20	-	-	10.00	2.3 ~ 10.7	3350	250 ~ 4060	16.8	15.4	1.92	5.04	5.04	-	-	12.00	2.7 ~ 13.6	3120	240 ~ 4230	15.3	14.1
16+42+50	1.48	3.89	4.63	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	1.78	4.67	5.55	-	-	12.00	2.7 ~ 13.8	2950	270 ~ 4150	14.5	13.3
16+42+60	1.36	3.56	5.08	-	-	10.00	2.3 ~ 10.7	2960	280 ~ 3490	14.8	13.6	1.63	4.27	6.10	-	-	12.00	2.7 ~ 13.8	2950	270 ~ 4150	14.5	13.3
16+42+71	1.24	3.26	5.50	-	-	10.00	2.3 ~ 10.7	2890	280 ~ 3350	14.5	13.3	1.49	3.91	6.60	-	-	12.00	2.7 ~ 14.1	2940	270 ~ 4250	14.4	13.2
16+50+50	1.38	4.31	4.31	-	-	10.00	2.3 ~ 10.7	2700	320 ~ 3090	13.5	12.4	1.66	5.17	5.17	-	-	12.00	2.7 ~ 13.8	2840	300 ~ 3940	14.0	12.8
16+50+60	1.27	3.97	4.76	-	-	10.00	2.3 ~ 10.7	2700	320 ~ 3090	13.5	12.4	1.53	4.76	5.71	-	-	12.00	2.7 ~ 13.8	2840	300 ~ 3940	14.0	12.8
16+50+71	1.17	3.65	5.18	-	-	10.00	2.3 ~ 10.7	2640	340 ~ 3020	13.2	12.1	1.40	4.38	6.22	-	-	12.00	2.7 ~ 14.1	2830	310 ~ 4100	13.9	12.7
16+60+60	1.18	4.41	4.41	-	-	10.00	2.3 ~ 10.7	2700	320 ~ 3090	13.5	12.4	1.42	5.29	5.29	-	-	12.00	2.7 ~ 14.1	2840	300 ~ 4110	14.0	12.8
16+60+71	1.09	4.08	4.83	-	-	10.00	2.3 ~ 10.7	2640	340 ~ 3020	13.2	12.1	1.31	4.90	5.79	-	-	12.00	2.7 ~ 14.1	2830	310 ~ 4100	13.9	12.7
16+71+71	1.02	4.49	4.49	-	-	10.00	2.3 ~ 10.7	2580	350 ~ 2960	12.9	11.8	1.22	5.39	5.39	-	-	12.00	2.7 ~ 14.4	2820	320 ~ 4200	13.9	12.7
20+20+20	2.00	2.00	2.00	-	-	6.00	2.3 ~ 8.5	1540	260 ~ 2700	7.8	7.1	3.20	3.20	3.20	-	-	9.60	2.7 ~ 12.3	2660	230 ~ 3780		

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION														
	Cooling Capacity [kW]						Input Power [W]		Current [A]		Heating Capacity [kW]						Input Power [W]		Current [A]							
	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V
42+42+42	3.33	3.33	3.33	-	-	9.99	2.3	10.7	3220	250	3840	16.1	14.8	4.00	4.00	4.00	-	-	12.00	2.7	13.8	3070	250	4230	15.1	13.8
42+42+50	3.13	3.13	3.74	-	-	10.00	2.3	10.7	2830	280	3350	14.2	13.0	3.76	3.76	4.48	-	-	12.00	2.7	14.1	2910	280	4200	14.3	13.1
42+42+60	2.92	2.92	4.16	-	-	10.00	2.3	10.7	2830	280	3350	14.2	13.0	3.50	3.50	5.00	-	-	12.00	2.7	14.1	2910	280	4200	14.3	13.1
42+42+71	2.71	2.71	4.58	-	-	10.00	2.3	10.7	2770	310	3220	13.9	12.7	3.25	3.25	5.00	-	-	12.00	2.7	14.4	2890	280	4310	14.2	13.0
42+50+50	2.96	3.52	3.52	-	-	10.00	2.3	10.7	2640	350	3020	13.2	12.1	3.54	4.23	4.23	-	-	12.00	2.7	14.1	2850	330	4050	14.0	12.8
42+50+60	2.76	3.29	3.95	-	-	10.00	2.3	10.7	2640	350	3020	13.2	12.1	3.32	3.95	4.73	-	-	12.00	2.7	14.4	2850	330	4170	14.0	12.8
42+50+71	2.58	3.07	4.35	-	-	10.00	2.3	10.7	2580	350	2960	12.9	11.8	3.09	3.68	5.23	-	-	12.00	2.7	14.4	2830	340	4160	13.9	12.7
42+60+60	2.60	3.70	3.70	-	-	10.00	2.3	10.7	2640	350	3020	13.2	12.1	3.12	4.44	4.44	-	-	12.00	2.7	14.4	2850	330	4170	14.0	12.8
42+60+71	2.43	3.47	4.10	-	-	10.00	2.3	10.7	2580	350	2960	12.9	11.8	2.92	4.16	4.92	-	-	12.00	2.7	14.4	2830	340	4160	13.9	12.7
50+50+50	3.33	3.33	3.33	-	-	9.99	2.3	10.7	2470	390	2830	12.4	11.3	4.00	4.00	4.00	-	-	12.00	2.7	14.4	2800	400	4090	13.8	12.6
50+50+60	3.13	3.13	3.74	-	-	10.00	2.3	10.7	2530	390	2830	12.7	11.6	3.75	3.75	4.50	-	-	12.00	2.7	14.4	2800	400	4090	13.8	12.6
50+50+71	2.92	2.92	4.16	-	-	10.00	2.3	10.7	2470	390	2840	12.4	11.3	3.51	3.51	4.98	-	-	12.00	2.7	14.4	2790	410	4070	13.7	12.6
50+60+60	2.94	3.53	3.53	-	-	10.00	2.3	10.7	2530	390	2830	12.7	11.6	3.52	4.24	4.24	-	-	12.00	2.7	14.4	2800	400	4090	13.8	12.6
50+60+71	2.77	3.31	3.92	-	-	10.00	2.3	10.7	2470	390	2840	12.4	11.3	3.31	3.98	4.71	-	-	12.00	2.7	14.4	2790	410	4070	13.7	12.6
60+60+60	3.33	3.33	3.33	-	-	9.99	2.3	10.7	2470	390	2830	12.4	11.3	4.00	4.00	4.00	-	-	12.00	2.7	14.4	2800	400	4090	13.8	12.6

• Specification based on JIS C 9612 standard.
• A minimum of 2 indoor units must be connected.

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION														
	Cooling Capacity [kW]						Input Power [W]		Current [A]		Heating Capacity [kW]						Input Power [W]		Current [A]							
	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V
16+20+25+35	1.60	2.00	2.50	3.50	-	9.60	2.3	10.6	2840	310	3530	14.2	13.0	2.00	2.50	3.13	4.37	-	12.00	3.4	14.2	2980	340	4320	14.6	13.4
16+20+25+42	1.55	1.94	2.43	4.08	-	10.00	2.3	10.6	3040	310	3530	15.2	13.9	1.87	2.33	2.91	4.89	-	12.00	3.4	14.2	2970	350	4310	14.6	13.4
16+20+25+50	1.45	1.80	2.25	4.50	-	10.00	2.3	10.6	2850	360	3240	14.3	13.1	1.73	2.16	2.70	5.41	-	12.00	3.4	14.2	2910	400	4160	14.3	13.1
16+20+25+60	1.32	1.65	2.07	4.96	-	10.00	2.3	10.6	2850	360	3380	14.3	13.1	1.59	1.98	2.48	5.95	-	12.00	3.4	14.2	2910	400	4160	14.3	13.1
16+20+25+71	1.21	1.52	1.89	5.38	-	10.00	2.3	10.8	2850	390	3310	14.3	13.1	1.46	1.82	2.27	6.45	-	12.00	3.4	14.4	2900	420	4200	14.2	13.1
16+20+35+35	1.51	1.89	3.30	3.30	-	10.00	2.3	10.6	3040	320	3450	15.2	13.9	1.82	2.26	3.96	3.96	-	12.00	3.4	14.2	2950	360	4220	14.5	13.3
16+20+35+42	1.42	1.77	3.10	3.71	-	10.00	2.3	10.6	3040	320	3450	15.2	13.9	1.70	2.12	3.72	4.46	-	12.00	3.4	14.2	2940	370	4210	14.4	13.2
16+20+35+50	1.33	1.65	2.89	4.13	-	10.00	2.3	10.8	2850	380	3380	14.3	13.1	1.59	1.98	3.47	4.96	-	12.00	3.4	14.2	2890	420	4130	14.2	13.0
16+20+35+60	1.22	1.53	2.67	4.58	-	10.00	2.3	10.8	2850	380	3380	14.3	13.1	1.47	1.83	3.21	5.49	-	12.00	3.4	14.4	2890	420	4190	14.2	13.0
16+20+35+71	1.13	1.41	2.46	5.00	-	10.00	2.3	11.0	2780	390	3460	13.9	12.8	1.35	1.69	2.96	6.00	-	12.00	3.4	14.4	2880	430	4170	14.1	13.0
16+20+42+42	1.32	1.67	3.85	3.00	-	10.00	2.3	10.6	2980	320	3450	14.9	13.7	1.60	2.00	4.20	4.20	-	12.00	3.4	14.2	2930	370	4200	14.4	13.2
16+20+42+50	1.25	1.56	3.28	3.91	-	10.00	2.3	10.8	2850	390	3310	14.3	13.1	1.50	1.88	3.94	4.68	-	12.00	3.4	14.4	2880	420	4170	14.1	13.0
16+20+42+60	1.16	1.45	3.04	4.35	-	10.00	2.3	10.8	2850	390	3310	14.3	13.1	1.39	1.74	3.65	5.22	-	12.00	3.4	14.4	2880	420	4170	14.1	13.0
16+20+42+71	1.07	1.34	2.82	4.77	-	10.00	2.3	11.0	2780	390	3390	13.9	12.8	1.29	1.61	3.38	5.72	-	12.00	3.4	14.4	2870	430	4160	14.1	12.9
16+20+50+50	1.18	1.47	3.68	3.67	-	10.00	2.3	10.8	2730	430	3180	13.7	12.5	1.42	1.76	4.41	4.41	-	12.00	3.4	14.4	2890	500	4100	14.2	13.0
16+20+50+60	1.10	1.37	3.42	4.11	-	10.00	2.3	11.0	2730	430	3320	13.7	12.5	1.32	1.64	4.11	4.93	-	12.00	3.4	14.4	2890	500	4100	14.2	13.0
16+20+50+71	1.03	1.27	3.18	4.52	-	10.00	2.3	11.0	2730	470	3250	13.7	12.5	1.22	1.53	3.82	5.43	-	12.00	3.4	14.4	2880	510	4140	14.1	13.0
16+20+60+60	1.03	1.27	3.85	3.85	-	10.00	2.3	11.0	2730	430	3320	13.7	12.5	1.23	1.53	4.62	4.62	-	12.00	3.4	14.4	2890	500	4100	14.2	13.0
16+20+60+71	0.96	1.20	3.59	4.25	-	10.00	2.3	11.2	2730	470	3400	13.7	12.5	1.15	1.44	4.31	5.10	-	12.00	3.4	14.4	2880	510	4140	14.1	13.0
16+20+71+71	0.90	1.12	3.99	3.99	-	10.00	2.3	11.2	2730	470	3400	13.7	12.5	1.08	1.34	4.79	4.79	-	12.00	3.4	14.4	2870	520	4130	14.1	12.9
16+25+25+25	1.60	2.50	2.50	2.50	-	9.10	2.3	10.6	2610	310	3600	13.1	12.0	2.10	3.30	3.30	3.30	-	12.00	3.4	14.2	3000	340	4360	14.7	13.5
16+25+25+35	1.58	2.48	2.48	3.46	-	10.00	2.3	10.6	3040	310	3530	15.2	13.9	1.90	2.97	2.97	4.16	-	12.00	3.4	14.2	2980	340	4320	14.6	13.4
16+25+25+42	1.49	2.31	2.31	3.89	-	10.00	2.3	10.6	3040	310	3530	15.2	13.9	1.78	2.78	2.78	4.66	-	12.00	3.4	14.2	2970	350	4310	14.6	13.4
16+25+25+50	1.38	2.16	2.16	4.30	-	10.00	2.3	10.6	2850	360	3240	14.3	13.1	1.66	2.59	2.59	5.16	-	12.00	3.4	14.2	2910	400	4160	14.3	13.1
16+25+25+60	1.28	1.98	1.98	4.76	-	10.00	2.3	10.8	2850	360	3380	14.3	13.1	1.53	2.38	2.38	5.71	-	12.00	3.4	14.2	2910	400	4160	14.3	13.1
16+25+25+71	1.18	1.82	1.82	5.18	-	10.00	2.3	10.8	2850	390	3310	14.3	13.1	1.40	2.19	2.19	6.22	-	12.00	3.4	14.4	2900	420	4200	14.2	13.1
16+25+35+35	1.45	2.25	3.15	3.15	-	10.00	2.3	10.6	3040	320	3450	15.2	13.9	1.74	2.70	3.78	3.78	-	12.00	3.4	14.2	2950	360	4220	14.5	13.3
16+25+35+42	1.36	2.12	2.97	3.55	-	10.00	2.3	10.6	3040	320	3450	15.2	13.9	1.63	2.54	3.56	4.27	-	12.00	3.4	14.2	2940	370	4210	14.4	13.2
16+25+35+50	1.27	1.98	2.78	3.97	-	10.00	2.3	10.8	2850	380	3380	14.3	13.1	1.53	2.38	3.33	4.76	-	12.00	3.4	14.2	2890	420	4130	14.2	13.0
16+25+35+60	1.18	1.84	2.57	4.41	-	10.00	2.3	10.8	2850	380	3380	14.3	13.1	1.41	2.21	3.09	5.29	-	12.00	3.4	14.4	2890	420	4190	14.2	13.0
16+25+35+71	1.09	1.70	2.38	4.83	-	10.00	2.3	11.0	2780	390	3460	13.9	12.8	1.31	2.04	2.86	5.79	-	12.00	3.4	14.4	2880	430	4170	14.1	13.0
16+25+42+42	1.28	2.00	3.36	3.36	-	10.00	2.3	10.8	2980	320	3450	14.9	13.7	1.54	2.40	4.03	4.03	-	12.00	3.4	14.2	2930	370	4200	14.4	13.2
16+25+42+50	1.20	1.																								

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION														
	Cooling Capacity [kW]						Input Power [W]		Current [A]		Heating Capacity [kW]						Input Power [W]		Current [A]							
	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V
16+42+50+50	1.02	2.66	3.16	3.16	-	10.00	2.3	11.2	2730	470	3400	13.7	12.5	1.22	3.18	3.80	3.80	-	12.00	3.4	14.4	2870	530	4120	14.1	12.9
16+42+50+60	0.95	2.50	2.98	3.57	-	10.00	2.3	11.2	2730	470	3400	13.7	12.5	1.14	3.00	3.57	4.29	-	12.00	3.4	14.4	2870	530	4120	14.1	12.9
16+42+50+71	0.89	2.35	2.79	3.97	-	10.00	2.3	11.2	2730	470	3400	13.7	12.5	1.07	2.82	3.35	4.76	-	12.00	3.4	14.4	2860	540	4110	14.1	12.9
16+42+60+60	0.90	2.36	3.37	3.37	-	10.00	2.3	11.2	2730	470	3400	13.7	12.5	1.08	2.84	4.04	4.04	-	12.00	3.4	14.4	2870	530	4120	14.1	12.9
16+50+50+50	0.97	3.01	3.01	3.01	-	10.00	2.3	11.2	2690	520	3340	13.5	12.3	1.17	3.61	3.61	3.61	-	12.00	3.4	14.4	2900	630	4120	14.2	13.1
16+50+50+60	0.91	2.84	2.84	3.41	-	10.00	2.3	11.2	2690	520	3340	13.5	12.3	1.09	3.41	3.41	4.09	-	12.00	3.4	14.4	2900	630	4120	14.2	13.1
20+20+20+20	2.00	2.00	2.00	2.00	-	8.00	2.3	10.6	2170	310	3600	10.9	10.0	3.00	3.00	3.00	3.00	-	12.00	3.4	14.2	2990	340	4350	14.7	13.5
20+20+20+25	2.00	2.00	2.00	2.50	-	8.50	2.3	10.6	2350	310	3600	11.8	10.8	2.82	2.82	2.82	3.54	-	12.00	3.4	14.2	2990	340	4350	14.7	13.5
20+20+20+35	2.00	2.00	2.00	3.50	-	9.50	2.3	10.6	2810	320	3530	14.1	12.9	2.53	2.53	2.53	4.41	-	12.00	3.4	14.2	2970	350	4310	14.6	13.4
20+20+20+42	1.96	1.96	1.96	4.12	-	10.00	2.3	10.6	3040	320	3530	15.2	13.9	2.35	2.35	2.35	4.95	-	12.00	3.4	14.2	2960	360	4290	14.5	13.3
20+20+20+50	1.82	1.82	1.82	4.54	-	10.00	2.3	10.6	2850	380	3240	14.3	13.1	2.18	2.18	2.18	5.46	-	12.00	3.4	14.2	2900	420	4150	14.2	13.1
20+20+20+60	1.67	1.67	1.67	4.99	-	10.00	2.3	10.6	2850	380	3240	14.3	13.1	2.00	2.00	2.00	6.00	-	12.00	3.4	14.2	2900	420	4150	14.2	13.1
20+20+20+71	1.53	1.53	1.53	5.41	-	10.00	2.3	10.8	2850	390	3310	14.3	13.1	1.83	1.83	1.83	6.51	-	12.00	3.4	14.4	2890	420	4190	14.2	13.0
20+20+25+25	2.00	2.00	2.50	2.50	-	9.00	2.3	10.6	2580	310	3600	12.9	11.8	2.67	2.67	3.33	3.33	-	12.00	3.4	14.2	2990	340	4350	14.7	13.5
20+20+25+35	2.00	2.00	2.50	3.50	-	10.00	2.3	10.6	3040	320	3530	15.2	13.9	2.40	2.40	3.00	4.20	-	12.00	3.4	14.2	2970	350	4310	14.6	13.4
20+20+25+42	1.87	1.87	2.34	3.92	-	10.00	2.3	10.6	3040	320	3530	15.2	13.9	2.24	2.24	2.81	4.71	-	12.00	3.4	14.2	2960	360	4290	14.5	13.3
20+20+25+50	1.74	1.74	2.17	4.35	-	10.00	2.3	10.6	2850	380	3240	14.3	13.1	2.09	2.09	2.61	5.21	-	12.00	3.4	14.2	2900	420	4150	14.2	13.1
20+20+25+60	1.60	1.60	2.00	4.80	-	10.00	2.3	10.8	2850	380	3380	14.3	13.1	1.92	1.92	2.40	5.76	-	12.00	3.4	14.2	2900	420	4150	14.2	13.1
20+20+25+71	1.47	1.47	1.84	5.22	-	10.00	2.3	10.8	2850	390	3310	14.3	13.1	1.76	1.76	2.22	6.26	-	12.00	3.4	14.4	2890	420	4190	14.2	13.0
20+20+35+35	1.82	1.82	3.18	3.18	-	10.00	2.3	10.6	2980	320	3450	14.9	13.7	2.18	2.18	3.82	3.82	-	12.00	3.4	14.2	2940	370	4210	14.4	13.2
20+20+35+42	1.71	1.71	2.99	3.59	-	10.00	2.3	10.6	2980	320	3450	14.9	13.7	2.05	2.05	3.59	4.31	-	12.00	3.4	14.2	2930	370	4200	14.4	13.2
20+20+35+50	1.60	1.60	2.80	4.00	-	10.00	2.3	10.8	2850	390	3310	14.3	13.1	1.92	1.92	3.36	4.80	-	12.00	3.4	14.2	2880	420	4120	14.1	13.0
20+20+35+60	1.48	1.48	2.60	4.44	-	10.00	2.3	10.8	2850	390	3310	14.3	13.1	1.78	1.78	3.11	5.33	-	12.00	3.4	14.4	2880	420	4170	14.1	13.0
20+20+35+71	1.37	1.37	2.40	4.86	-	10.00	2.3	11.0	2780	390	3390	13.9	12.8	1.64	1.64	2.88	5.84	-	12.00	3.4	14.4	2870	430	4160	14.1	12.9
20+20+42+42	1.61	1.61	3.39	3.39	-	10.00	2.3	10.8	2980	340	3600	14.9	13.7	1.94	1.94	4.06	4.06	-	12.00	3.4	14.2	2920	370	4190	14.3	13.1
20+20+42+50	1.52	1.52	3.18	3.78	-	10.00	2.3	10.8	2850	390	3310	14.3	13.1	1.82	1.82	3.82	4.54	-	12.00	3.4	14.4	2870	430	4160	14.1	12.9
20+20+42+60	1.41	1.41	2.96	4.22	-	10.00	2.3	11.0	2850	390	3460	14.3	13.1	1.69	1.69	3.55	5.07	-	12.00	3.4	14.4	2870	430	4160	14.1	12.9
20+20+42+71	1.31	1.31	2.75	4.63	-	10.00	2.3	11.0	2780	390	3390	13.9	12.8	1.57	1.57	3.29	5.57	-	12.00	3.4	14.4	2860	440	4200	14.1	12.9
20+20+50+50	1.43	1.43	3.57	3.57	-	10.00	2.3	10.8	2730	440	3180	13.7	12.5	1.71	1.71	4.29	4.29	-	12.00	3.4	14.4	2880	510	4150	14.1	13.0
20+20+50+60	1.33	1.33	3.34	4.00	-	10.00	2.3	11.0	2730	440	3320	13.7	12.5	1.60	1.60	4.00	4.80	-	12.00	3.4	14.4	2880	510	4150	14.1	13.0
20+20+50+71	1.24	1.24	3.11	4.41	-	10.00	2.3	11.2	2730	470	3400	13.7	12.5	1.49	1.49	3.73	5.29	-	12.00	3.4	14.4	2870	520	4130	14.1	12.9
20+20+60+60	1.25	1.25	3.75	3.75	-	10.00	2.3	11.2	2730	440	3390	13.7	12.5	1.50	1.50	4.50	4.50	-	12.00	3.4	14.4	2880	510	4150	14.1	13.0
20+20+60+71	1.17	1.17	3.51	4.15	-	10.00	2.3	11.2	2730	470	3400	13.7	12.5	1.40	1.40	4.22	4.98	-	12.00	3.4	14.4	2870	520	4130	14.1	12.9
20+20+71+71	1.10	1.10	3.90	3.90	-	10.00	2.3	11.2	2740	480	3330	13.7	12.6	1.32	1.32	4.68	4.68	-	12.00	3.4	14.4	2870	530	4120	14.1	12.9
20+25+25+25	2.00	2.50	2.50	2.50	-	9.50	2.3	10.6	2810	310	3600	14.1	12.9	2.52	3.16	3.16	3.16	-	12.00	3.4	14.2	2990	340	4350	14.7	13.5
20+25+25+35	1.91	2.38	2.38	3.33	-	10.00	2.3	10.6	3040	320	3530	15.2	13.9	2.29	2.86	2.86	3.99	-	12.00	3.4	14.2	2970	350	4310	14.6	13.4
20+25+25+42	1.79	2.23	2.23	3.75	-	10.00	2.3	10.6	3040	320	3530	15.2	13.9	2.14	2.68	2.68	4.50	-	12.00	3.4	14.2	2960	360	4290	14.5	13.3
20+25+25+50	1.67	2.08	2.08	4.17	-	10.00	2.3	10.6	2850	380	3240	14.3	13.1	2.00	2.50	2.50	5.00	-	12.00	3.4	14.2	2900	420	4150	14.2	13.1
20+25+25+60	1.54	1.92	1.92	4.62	-	10.00	2.3	10.8	2850	380	3380	14.3	13.1	1.85	2.31	2.31	5.53	-	12.00	3.4	14.4	2900	420	4210	14.2	13.1
20+25+25+71	1.42	1.77	1.77	5.04	-	10.00	2.3	10.8	2850	390	3310	14.3	13.1	1.70	2.13	2.13	6.04	-	12.00	3.4	14.4	2890	420	4190	14.2	13.0
20+25+35+35	1.75	2.17	3.04	3.04	-	10.00	2.3	10.6	2980	320	3450	14.9	13.7	2.09	2.61	3.65	3.65	-	12.00	3.4	14.2	2940	370	4210	14.4	13.2
20+25+35+42	1.64	2.05	2.87	3.44	-	10.00	2.3	10.8	2980	320	3600	14.9	13.7	1.97	2.46	3.44	4.13	-	12.00	3.4	14.2	2930	370	4200	14.4	13.2
20+25+35+50	1.54	1.92	2.69	3.85	-	10.00	2.3	10.8	2850	390	3310	14.3	13.1	1.85	2.31	3.23	4.61	-	12.00	3.4	14.4	2880	420	4170	14.1	13.0
20+25+35+60	1.43	1.79	2.50	4.20	-	10.00	2.3	10.8	2850	390	3310	14.3	13.1	1.72	2.14	3.00	5.14	-	12.00	3.4	14.4	2880	420	4170	14.1	13.0
20+25+35+71	1.32	1.66	2.32	4.70	-	10.00	2.3	11.0	2780	390	3390	13.9	12.8	1.59	1.99	2.78	5.64	-	12.00	3.4	14.4	2870	430	4160	14.1	12.9
20+25+42+42	1.55	1.93	3.26	3.26	-	10.00	2.3	10.8	2980	340	3600	14.9	13.7	1.86	2.32	3.91	3.91	-	12.00	3.4	14.4	2920	370	4310	14.3	13.1
20+25+42+50	1.46	1.82	3.07	3.65	-	10.00	2.3	10.8	2850	390	3310	14.3	13.1	1.75	2.19	3.68	4.38	-	12.00	3.4	14.4	2870	430	4160	14.1	12.9
20+25+42+60	1.36	1.70	2.86	4.08	-	10.00	2.3	11.0	2850	390	3460	14.3	13.1	1.63	2.04	3.43	4.90	-	12.00	3.4	14.4	2870	430	4160	14.1	12.9
20+25+42+71	1.27	1.58	2.66	4.49	-	10.00	2.3	11.2	2780	390	3530	13.9	12.8	1.5												

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION										HEATING OPERATION																
	Cooling Capacity [kW]					Input Power [W]		Current [A]		Heating Capacity [kW]					Input Power [W]		Current [A]										
	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	
4 Rooms	35+35+35+42	2.38	2.38	2.38	2.86	-	10.00	2.3	11.0	2910	350	3600	14.6	13.3	2.86	2.86	2.86	3.42	-	12.00	3.4	14.4	2930	390	4250	14.4	13.2
	35+35+35+50	2.26	2.26	2.26	3.22	-	10.00	2.3	11.0	2780	390	3390	13.9	12.8	2.71	2.71	2.71	3.87	-	12.00	3.4	14.4	2890	460	4170	14.2	13.0
	35+35+35+60	2.12	2.12	2.12	3.64	-	10.00	2.3	11.2	2780	390	3530	13.9	12.8	2.55	2.55	2.55	4.35	-	12.00	3.4	14.4	2890	460	4170	14.2	13.0
	35+35+35+71	1.99	1.99	1.99	4.03	-	10.00	2.3	11.2	2790	430	3460	14.0	12.8	2.39	2.39	2.39	4.83	-	12.00	3.4	14.4	2880	470	4150	14.1	13.0
	35+35+42+42	2.27	2.27	2.73	2.73	-	10.00	2.3	11.0	2910	350	3600	14.6	13.3	2.73	2.73	3.27	3.27	-	12.00	3.4	14.4	2920	400	4240	14.3	13.1
	35+35+42+50	2.16	2.16	2.59	3.09	-	10.00	2.3	11.2	2790	420	3530	14.0	12.8	2.59	2.59	3.12	3.70	-	12.00	3.4	14.4	2880	470	4160	14.1	13.0
	35+35+42+60	2.03	2.03	2.45	3.49	-	10.00	2.3	11.2	2790	420	3530	14.0	12.8	2.44	2.44	2.93	4.19	-	12.00	3.4	14.4	2880	470	4160	14.1	13.0
	35+35+42+71	1.91	1.91	2.30	3.88	-	10.00	2.3	11.2	2790	430	3460	14.0	12.8	2.30	2.30	2.75	4.65	-	12.00	3.4	14.4	2870	480	4140	14.1	12.9
	35+35+50+50	2.06	2.06	2.94	2.94	-	10.00	2.3	11.2	2730	470	3400	13.7	12.5	2.47	2.47	3.53	3.53	-	12.00	3.4	14.4	2890	550	4090	14.2	13.0
	35+35+50+60	1.94	1.94	2.79	3.33	-	10.00	2.3	11.2	2730	470	3400	13.7	12.5	2.33	2.33	3.33	4.01	-	12.00	3.4	14.4	2890	550	4090	14.2	13.0
	35+42+42+42	2.17	2.17	2.61	2.61	-	10.00	2.3	11.2	2910	350	3460	14.6	13.3	2.61	2.61	3.13	3.13	-	12.00	3.4	14.4	2910	400	4220	14.3	13.1
	35+42+42+50	2.07	2.49	2.49	2.95	-	10.00	2.3	11.2	2790	420	3540	14.0	12.8	2.49	2.98	2.98	3.55	-	12.00	3.4	14.4	2870	480	4140	14.1	12.9
	35+42+42+60	1.96	2.35	2.35	3.34	-	10.00	2.3	11.2	2790	420	3540	14.0	12.8	2.35	2.82	2.82	4.01	-	12.00	3.4	14.4	2870	480	4140	14.1	12.9
	35+42+50+50	1.99	2.37	2.82	2.82	-	10.00	2.3	11.2	2740	470	3400	13.7	12.6	2.37	2.85	3.39	3.39	-	12.00	3.4	14.4	2890	560	4080	14.2	13.0
	42+42+42+42	2.50	2.50	2.50	2.50	-	10.00	2.3	11.2	2910	350	3680	14.6	13.3	3.00	3.00	3.00	3.00	-	12.00	3.4	14.4	2900	400	4210	14.2	13.1
	42+42+42+50	2.39	2.39	2.39	2.83	-	10.00	2.3	11.2	2790	420	3460	14.0	12.8	2.86	2.86	2.86	3.42	-	12.00	3.4	14.4	2860	480	4130	14.1	12.9
5 Rooms	16+16+16+16+16	1.60	1.60	1.60	1.60	1.60	8.00	2.3	11.5	1990	390	3810	9.8	9.0	2.40	2.40	2.40	2.40	12.00	3.4	14.5	3050	540	4320	14.4	13.4	
	16+16+16+16+20	1.60	1.60	1.60	1.60	2.00	8.40	2.3	11.5	2100	390	3810	10.3	9.5	2.29	2.29	2.29	2.29	12.00	3.4	14.5	3040	560	4310	14.4	13.3	
	16+16+16+16+25	1.60	1.60	1.60	1.60	2.50	8.90	2.3	11.5	2270	390	3810	11.2	10.3	2.16	2.16	2.16	2.16	12.00	3.4	14.5	3040	560	4310	14.4	13.3	
	16+16+16+16+35	1.60	1.60	1.60	1.60	3.50	9.90	2.3	11.5	2690	420	3740	13.2	12.2	1.94	1.94	1.94	1.94	12.00	3.4	14.5	3070	570	4270	14.5	13.4	
	16+16+16+16+42	1.51	1.51	1.51	1.51	3.96	10.00	2.3	11.5	2750	430	3740	13.5	12.5	1.81	1.81	1.81	1.81	4.76	12.00	3.4	14.5	3060	580	4320	14.5	13.4
	16+16+16+16+50	1.40	1.40	1.40	1.40	4.40	10.00	2.3	11.5	2700	480	3600	13.3	12.3	1.68	1.68	1.68	1.68	5.28	12.00	3.4	14.5	3080	680	4250	14.6	13.5
	16+16+16+16+60	1.29	1.29	1.29	1.29	4.84	10.00	2.3	11.5	2700	480	3600	13.3	12.3	1.55	1.55	1.55	1.55	5.80	12.00	3.4	14.5	3080	680	4250	14.6	13.5
	16+16+16+16+71	1.19	1.19	1.19	1.19	5.24	10.00	2.3	11.5	2710	510	3530	13.3	12.3	1.42	1.42	1.42	1.42	6.32	12.00	3.4	14.5	3070	700	4240	14.5	13.4
	16+16+16+20+20	1.60	1.60	1.60	2.00	2.00	8.80	2.3	11.5	2270	420	3730	11.2	10.3	2.18	2.18	2.18	2.18	2.73	12.00	3.4	14.5	3040	560	4290	14.4	13.3
	16+16+16+20+25	1.60	1.60	1.60	2.00	2.50	9.30	2.3	11.5	2440	420	3730	12.0	11.1	2.06	2.06	2.06	2.59	3.23	12.00	3.4	14.5	3040	560	4290	14.4	13.3
	16+16+16+20+35	1.55	1.55	1.55	1.95	3.40	10.00	2.3	11.5	2750	430	3740	13.5	12.5	1.86	1.86	1.86	2.34	4.08	12.00	3.4	14.5	3060	580	4320	14.5	13.4
	16+16+16+20+42	1.45	1.45	1.45	1.83	3.82	10.00	2.3	11.5	2750	430	3740	13.5	12.5	1.75	1.75	1.75	2.18	4.57	12.00	3.4	14.5	3050	600	4310	14.4	13.4
	16+16+16+20+50	1.36	1.36	1.36	1.69	4.23	10.00	2.3	11.5	2710	510	3600	13.3	12.3	1.63	1.63	1.63	2.03	5.08	12.00	3.4	14.5	3070	700	4240	14.5	13.4
	16+16+16+20+60	1.25	1.25	1.25	1.56	4.69	10.00	2.3	11.5	2710	510	3600	13.3	12.3	1.50	1.50	1.50	1.88	5.62	12.00	3.4	14.5	3070	700	4240	14.5	13.4
	16+16+16+20+71	1.15	1.15	1.15	1.44	5.11	10.00	2.3	11.5	2710	520	3530	13.3	12.3	1.38	1.38	1.38	1.73	6.13	12.00	3.4	14.5	3060	710	4230	14.5	13.4
	16+16+16+25+25	1.60	1.60	1.60	2.50	2.50	9.80	2.3	11.5	2690	420	3730	13.2	12.2	1.96	1.96	1.96	3.06	3.06	12.00	3.4	14.5	3040	560	4290	14.4	13.3
	16+16+16+25+35	1.48	1.48	1.48	2.32	3.24	10.00	2.3	11.5	2750	430	3740	13.5	12.5	1.78	1.78	1.78	2.78	3.88	12.00	3.4	14.5	3060	580	4320	14.5	13.4
	16+16+16+25+42	1.39	1.39	1.39	2.18	3.65	10.00	2.3	11.5	2750	430	3740	13.5	12.5	1.67	1.67	1.67	2.61	4.38	12.00	3.4	14.5	3050	600	4310	14.4	13.4
	16+16+16+25+50	1.30	1.30	1.30	2.03	4.07	10.00	2.3	11.5	2710	510	3600	13.3	12.3	1.56	1.56	1.56	2.44	4.88	12.00	3.4	14.5	3070	700	4240	14.5	13.4
	16+16+16+25+60	1.20	1.20	1.20	1.89	4.51	10.00	2.3	11.5	2710	510	3600	13.3	12.3	1.44	1.44	1.44	2.27	5.41	12.00	3.4	14.5	3070	700	4240	14.5	13.4
	16+16+16+25+71	1.11	1.11	1.11	1.74	4.93	10.00	2.3	11.5	2710	520	3530	13.3	12.3	1.33	1.33	1.33	2.09	5.92	12.00	3.4	14.5	3060	710	4230	14.5	13.4
	16+16+16+35+35	1.36	1.36	1.36	2.96	2.96	10.00	2.3	11.5	2690	430	3660	13.2	12.2	1.62	1.62	1.62	3.57	3.57	12.00	3.4	14.5	3040	600	4290	14.4	13.3
	16+16+16+35+42	1.28	1.28	1.28	2.80	3.36	10.00	2.3	11.5	2690	430	3660	13.2	12.2	1.54	1.54	1.54	3.36	4.02	12.00	3.4	14.5	3040	610	4280	14.4	13.3
	16+16+16+35+50	1.20	1.20	1.20	2.64	3.76	10.00	2.3	11.5	2710	510	3530	13.3	12.3	1.44	1.44	1.44	3.17	4.51	12.00	3.4	14.5	3060	720	4270	14.5	13.4
	16+16+16+35+60	1.12	1.12	1.12	2.45	4.19	10.00	2.3	11.5	2710	510	3530	13.3	12.3	1.34	1.34	1.34	2.95	5.03	12.00	3.4	14.5	3060	720	4270	14.5	13.4
	16+16+16+35+71	1.04	1.04	1.04	2.27	4.61	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.25	1.25	1.25	2.73	5.52	12.00	3.4	14.5	3090	740	4260	14.6	13.5
	16+16+16+42+42	1.22	1.22	1.22	3.17	3.17	10.00	2.3	11.5	2690	430	3660	13.2	12.2	1.46	1.46	1.46	3.81	3.81	12.00	3.4	14.5	3030	630	4270	14.3	13.3
	16+16+16+42+50	1.14	1.14	1.14	3.01	3.57	10.00	2.3	11.5	2710	520	3530	13.3	12.3	1.37	1.37	1.37	3.60	4.29	12.00	3.4	14.5	3050	740	4260	14.4	13.4
	16+16+16+42+60	1.07	1.07	1.07	2.80	3.99	10.00	2.3	11.5	2710	520	3530	13.3	12.3	1.28	1.28	1.28	3.36	4.80	12.00	3.4	14.5	3050	740	4260	14.4	13.4
	16+16+16+42+71	0.99	0.99	0.99	2.62	4.41	10.00	2.3	11.5	2650	520	3540	13.0	12.0	1.19	1.19	1.19	3.14	5.29	12.00	3.4	14.5	3090	750	4250	14.6	13.5
	16+16+16+50+50	1.08	1.08	1.08	3.38	3.38	10.00	2.3	11.5	2670	600	3480	13.1	12.1	1.30	1.30	1.30	4.05									

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION														
	Cooling Capacity [kW]						Input Power [W]					Heating Capacity [kW]					Input Power [W]									
	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V
16+20+20+20+60	1.18	1.47	1.47	1.47	4.41	10.00	2.3	11.5	2710	510	3530	13.3	12.3	1.42	1.76	1.76	1.76	5.30	12.00	3.4	14.5	3060	720	4220	14.5	13.4
16+20+20+20+71	1.09	1.36	1.36	1.36	4.83	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.31	1.63	1.63	1.63	5.80	12.00	3.4	14.5	3050	730	4270	14.4	13.4
16+20+20+25+25	1.50	1.89	1.89	2.36	2.36	10.00	2.3	11.5	2750	420	3740	13.5	12.5	1.82	2.26	2.26	2.83	2.83	12.00	3.4	14.5	3070	570	4330	14.5	13.4
16+20+20+25+35	1.38	1.72	1.72	2.16	3.02	10.00	2.3	11.5	2750	430	3660	13.5	12.5	1.66	2.07	2.07	2.59	3.61	12.00	3.4	14.5	3050	600	4300	14.4	13.4
16+20+20+25+42	1.30	1.63	1.63	2.03	3.41	10.00	2.3	11.5	2690	430	3660	13.2	12.2	1.56	1.95	1.95	2.44	4.10	12.00	3.4	14.5	3040	610	4290	14.4	13.3
16+20+20+25+50	1.22	1.53	1.53	1.91	3.81	10.00	2.3	11.5	2710	510	3530	13.3	12.3	1.47	1.83	1.83	2.29	4.58	12.00	3.4	14.5	3060	720	4220	14.5	13.4
16+20+20+25+60	1.13	1.42	1.42	1.77	4.26	10.00	2.3	11.5	2710	510	3530	13.3	12.3	1.36	1.70	1.70	2.13	5.11	12.00	3.4	14.5	3060	720	4220	14.5	13.4
16+20+20+25+71	1.05	1.32	1.32	1.64	4.67	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.26	1.58	1.58	1.97	5.61	12.00	3.4	14.5	3050	730	4270	14.4	13.4
16+20+20+35+35	1.26	1.59	1.59	2.78	2.78	10.00	2.3	11.5	2690	440	3660	13.2	12.2	1.52	1.90	1.90	3.34	3.34	12.00	3.4	14.5	3030	630	4270	14.3	13.3
16+20+20+35+42	1.21	1.50	1.50	2.63	3.16	10.00	2.3	11.5	2690	440	3670	13.2	12.2	1.45	1.80	1.80	3.16	3.79	12.00	3.4	14.5	3070	640	4260	14.5	13.4
16+20+20+35+50	1.13	1.42	1.42	2.48	3.55	10.00	2.3	11.5	2750	520	3530	13.2	12.3	1.36	1.70	1.70	2.98	4.26	12.00	3.4	14.5	3090	600	4300	14.4	13.5
16+20+20+35+60	1.07	1.32	1.32	2.32	3.97	10.00	2.3	11.5	2710	520	3530	13.3	12.3	1.27	1.59	1.59	2.78	4.77	12.00	3.4	14.5	3090	750	4250	14.6	13.5
16+20+20+35+71	1.00	1.23	1.23	2.16	4.38	10.00	2.3	11.5	2660	550	3540	13.1	12.1	1.19	1.48	1.48	2.59	5.26	12.00	3.4	14.5	3080	760	4240	14.6	13.5
16+20+20+42+42	1.14	1.43	1.43	3.00	3.00	10.00	2.3	11.5	2700	460	3670	13.3	12.3	1.38	1.71	1.71	3.60	3.60	12.00	3.4	14.5	3060	640	4250	14.5	13.4
16+20+20+42+50	1.08	1.35	1.35	2.84	3.38	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.30	1.62	1.62	3.41	4.05	12.00	3.4	14.5	3090	760	4250	14.6	13.5
16+20+20+42+60	1.01	1.27	1.27	2.66	3.79	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.22	1.52	1.52	3.19	4.55	12.00	3.4	14.5	3090	760	4250	14.6	13.5
16+20+20+42+71	0.95	1.18	1.18	2.49	4.20	10.00	2.3	11.5	2660	560	3540	13.1	12.1	1.14	1.42	1.42	2.98	5.04	12.00	3.4	14.5	3080	780	4230	14.6	13.5
16+20+20+50+50	1.02	1.28	1.28	3.21	3.21	10.00	2.3	11.5	2680	610	3480	13.2	12.2	1.22	1.54	1.54	3.85	3.85	12.00	3.4	14.5	3170	890	4260	15.0	13.9
16+20+20+50+60	0.96	1.21	1.21	3.01	3.61	10.00	2.3	11.5	2680	610	3480	13.2	12.2	1.16	1.45	1.45	3.61	4.33	12.00	3.4	14.5	3170	890	4260	15.0	13.9
16+20+20+50+71	0.90	1.13	1.13	2.82	4.02	10.00	2.3	11.5	2680	650	3490	13.2	12.2	1.08	1.36	1.36	3.39	4.81	12.00	3.4	14.5	3160	900	4300	14.9	13.8
16+20+20+60+60	0.90	1.14	1.14	3.41	3.41	10.00	2.3	11.5	2680	610	3480	13.2	12.2	1.10	1.36	1.36	4.09	4.09	12.00	3.4	14.5	3170	890	4260	15.0	13.9
16+20+25+25+25	1.45	1.80	2.25	2.25	2.25	10.00	2.3	11.5	2750	420	3740	13.5	12.5	1.74	2.16	2.70	2.70	2.70	12.00	3.4	14.5	3070	570	4330	14.5	13.4
16+20+25+25+35	1.32	1.65	2.07	2.07	2.89	10.00	2.3	11.5	2750	430	3660	13.5	12.5	1.59	1.98	2.48	2.48	3.47	12.00	3.4	14.5	3050	600	4300	14.4	13.4
16+20+25+25+42	1.26	1.56	1.95	1.95	3.28	10.00	2.3	11.5	2690	430	3660	13.2	12.2	1.50	1.88	2.34	2.34	3.94	12.00	3.4	14.5	3040	610	4290	14.4	13.3
16+20+25+25+50	1.18	1.47	1.84	1.84	3.67	10.00	2.3	11.5	2710	510	3530	13.3	12.3	1.41	1.76	2.21	2.21	4.41	12.00	3.4	14.5	3060	720	4220	14.5	13.4
16+20+25+25+60	1.10	1.37	1.71	1.71	4.11	10.00	2.3	11.5	2710	510	3530	13.3	12.3	1.33	1.64	2.05	2.05	4.93	12.00	3.4	14.5	3060	720	4220	14.5	13.4
16+20+25+25+71	1.03	1.27	1.59	1.59	4.52	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.22	1.53	1.91	1.91	5.43	12.00	3.4	14.5	3050	730	4270	14.4	13.4
16+20+25+35+35	1.22	1.53	1.91	2.67	2.67	10.00	2.3	11.5	2690	440	3660	13.2	12.2	1.47	1.83	2.28	3.21	3.21	12.00	3.4	14.5	3030	630	4270	14.3	13.3
16+20+25+35+42	1.16	1.45	1.81	2.54	3.04	10.00	2.3	11.5	2690	440	3670	13.2	12.2	1.40	1.74	2.17	3.04	3.65	12.00	3.4	14.5	3070	640	4260	14.5	13.4
16+20+25+35+50	1.10	1.37	1.71	2.40	3.42	10.00	2.3	11.5	2710	520	3530	13.3	12.3	1.32	1.64	2.05	2.88	4.11	12.00	3.4	14.5	3090	750	4250	14.6	13.5
16+20+25+35+60	1.03	1.28	1.60	2.24	3.85	10.00	2.3	11.5	2710	520	3530	13.3	12.3	1.23	1.54	1.92	2.69	4.62	12.00	3.4	14.5	3090	750	4250	14.6	13.5
16+20+25+35+71	0.96	1.20	1.50	2.10	4.24	10.00	2.3	11.5	2660	550	3540	13.1	12.1	1.15	1.44	1.80	2.51	5.10	12.00	3.4	14.5	3080	760	4240	14.6	13.5
16+20+25+42+42	1.10	1.38	1.72	2.90	2.90	10.00	2.3	11.5	2700	460	3670	13.3	12.3	1.32	1.66	2.06	3.48	3.48	12.00	3.4	14.5	3060	640	4250	14.5	13.4
16+20+25+42+50	1.05	1.31	1.63	2.75	3.26	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.26	1.57	1.96	3.29	3.92	12.00	3.4	14.5	3090	760	4250	14.6	13.5
16+20+25+42+60	0.98	1.23	1.53	2.58	3.68	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.18	1.47	1.84	3.09	4.42	12.00	3.4	14.5	3090	760	4250	14.6	13.5
16+20+25+42+71	0.92	1.15	1.44	2.41	4.08	10.00	2.3	11.5	2660	560	3540	13.1	12.1	1.10	1.38	1.72	2.90	4.90	12.00	3.4	14.5	3080	780	4230	14.6	13.5
16+20+25+50+50	0.99	1.24	1.55	3.11	3.11	10.00	2.3	11.5	2680	610	3480	13.2	12.2	1.19	1.49	1.86	3.73	3.73	12.00	3.4	14.5	3170	890	4260	15.0	13.9
16+20+25+50+60	0.94	1.17	1.46	2.92	3.51	10.00	2.3	11.5	2680	610	3480	13.2	12.2	1.13	1.40	1.75	3.51	4.21	12.00	3.4	14.5	3170	890	4260	15.0	13.9
16+20+25+50+71	0.88	1.10	1.37	2.75	3.90	10.00	2.3	11.5	2680	650	3490	13.2	12.2	1.05	1.32	1.65	3.30	4.68	12.00	3.4	14.5	3160	900	4300	14.9	13.8
16+20+25+60+60	0.88	1.10	1.38	3.32	3.32	10.00	2.3	11.5	2680	610	3480	13.2	12.2	1.06	1.33	1.65	3.98	3.98	12.00	3.4	14.5	3170	890	4260	15.0	13.9
16+20+35+35+35	1.14	1.42	2.48	2.48	2.48	10.00	2.3	11.5	2700	470	3590	13.3	12.3	1.36	1.70	2.98	2.98	2.98	12.00	3.4	14.5	3060	650	4240	14.5	13.4
16+20+35+35+42	1.09	1.35	2.36	2.36	2.84	10.00	2.3	11.5	2700	470	3590	13.3	12.3	1.30	1.62	2.84	2.84	3.40	12.00	3.4	14.5	3050	650	4280	14.4	13.4
16+20+35+35+50	1.03	1.28	2.24	2.24	3.21	10.00	2.3	11.5	2660	550	3540	13.1	12.1	1.23	1.54	2.69	2.69	3.85	12.00	3.4	14.5	3080	780	4230	14.6	13.5
16+20+35+35+60	0.97	1.20	2.11	2.11	3.61	10.00	2.3	11.5	2660	550	3540	13.1	12.1	1.16	1.45	2.53	2.53	4.33	12.00	3.4	14.5	3080	780	4230	14.6	13.5
16+20+35+35+71	0.90	1.13	1.98	1.98	4.01	10.00	2.3	11.5	2660	560	3540	13.1	12.1	1.09	1.36	2.37	3.37	4.81	12.00	3.4	14.5	3110	790	4270	14.7	13.6
16+20+35+42+42	1.03	1.29	2.26	2.71	2.71	10.00	2.3	11.5	2700	470	3590	13.3	12.3	1.24	1.55	2.71	3.25	3.25	12.00	3.4	14.5	3040	670	4270	14.4	13.3
16+20+35+42+50	0.98	1.23	2.15	2.58	3.06	10.00	2.3	11.5	2660	550	3540	13.1	12.1	1.18	1.47	2										

CU-5Z100WBH-8: Free Multi Indoor Combination

Indoor unit capacity	COOLING OPERATION											HEATING OPERATION														
	Cooling Capacity [kW]						Input Power [W]		Current [A]		Heating Capacity [kW]						Input Power [W]		Current [A]							
	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V	Room A	Room B	Room C	Room D	Room E	Total	min	max	Rated	min	max	220V	240V
20+20+25+25+42	1.52	1.52	1.89	1.89	3.18	10.00	2.3	11.5	2690	430	3660	13.2	12.2	1.82	1.82	2.27	2.27	3.82	12.00	3.4	14.5	3030	610	4280	14.3	13.3
20+20+25+25+50	1.43	1.43	1.79	1.79	3.56	10.00	2.3	11.5	2710	510	3530	13.3	12.3	1.71	1.71	2.14	2.14	4.30	12.00	3.4	14.5	3060	720	4270	14.5	13.4
20+20+25+25+60	1.33	1.33	1.67	1.67	4.00	10.00	2.3	11.5	2710	510	3530	13.3	12.3	1.60	1.60	2.00	2.00	4.80	12.00	3.4	14.5	3060	720	4270	14.5	13.4
20+20+25+25+71	1.24	1.24	1.55	1.55	4.42	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.49	1.49	1.86	1.86	5.30	12.00	3.4	14.5	3090	750	4260	14.6	13.5
20+20+25+35+35	1.48	1.48	1.86	2.59	2.59	10.00	2.3	11.5	2700	460	3670	13.3	12.3	1.78	1.78	2.22	3.11	3.11	12.00	3.4	14.5	3070	640	4260	14.5	13.4
20+20+25+35+42	1.41	1.41	1.76	2.46	2.96	10.00	2.3	11.5	2700	460	3670	13.3	12.3	1.69	1.69	2.11	2.96	3.55	12.00	3.4	14.5	3060	640	4250	14.5	13.4
20+20+25+35+50	1.33	1.33	1.68	2.33	3.33	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.60	1.60	2.00	2.80	4.00	12.00	3.4	14.5	3090	760	4250	14.6	13.5
20+20+25+35+60	1.25	1.25	1.56	2.19	3.75	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.50	1.50	1.88	2.63	4.49	12.00	3.4	14.5	3090	760	4250	14.6	13.5
20+20+25+35+71	1.17	1.17	1.46	2.05	4.15	10.00	2.3	11.5	2660	560	3540	13.1	12.1	1.40	1.40	1.76	2.46	4.98	12.00	3.4	14.5	3080	780	4230	14.6	13.5
20+20+25+42+42	1.34	1.34	1.68	2.82	2.82	10.00	2.3	11.5	2700	470	3670	13.3	12.3	1.61	1.61	2.02	3.38	3.38	12.00	3.4	14.5	3060	650	4230	14.5	13.4
20+20+25+42+50	1.27	1.27	1.60	2.68	3.18	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.53	1.53	1.91	3.21	3.82	12.00	3.4	14.5	3080	760	4240	14.6	13.5
20+20+25+42+60	1.20	1.20	1.50	2.51	3.59	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.44	1.44	1.80	3.02	4.30	12.00	3.4	14.5	3080	760	4240	14.6	13.5
20+20+25+42+71	1.12	1.12	1.41	2.36	3.99	10.00	2.3	11.5	2660	560	3540	13.1	12.1	1.35	1.35	1.69	2.83	4.78	12.00	3.4	14.5	3080	780	4280	14.6	13.5
20+20+25+50+50	1.21	1.21	1.52	3.03	3.03	10.00	2.3	11.5	2680	610	3480	13.2	12.2	1.45	1.45	1.82	3.64	3.64	12.00	3.4	14.5	3170	900	4310	15.0	13.9
20+20+25+50+60	1.14	1.14	1.43	2.86	3.43	10.00	2.3	11.5	2680	610	3480	13.2	12.2	1.37	1.37	1.72	3.43	4.11	12.00	3.4	14.5	3170	900	4310	15.0	13.9
20+20+35+35+35	1.37	1.37	2.42	2.42	2.42	10.00	2.3	11.5	2700	470	3590	13.3	12.3	1.65	1.65	2.90	2.90	2.90	12.00	3.4	14.5	3050	650	4280	14.4	13.4
20+20+35+35+42	1.32	1.32	2.30	2.30	2.76	10.00	2.3	11.5	2700	470	3590	13.3	12.3	1.58	1.58	2.76	2.76	3.32	12.00	3.4	14.5	3040	670	4270	14.4	13.3
20+20+35+35+50	1.25	1.25	2.19	2.19	3.12	10.00	2.3	11.5	2660	550	3540	13.1	12.1	1.50	1.50	2.63	2.63	3.74	12.00	3.4	14.5	3120	790	4280	14.8	13.7
20+20+35+35+60	1.18	1.18	2.06	2.06	3.52	10.00	2.3	11.5	2660	550	3540	13.1	12.1	1.41	1.41	2.47	2.47	4.24	12.00	3.4	14.5	3120	790	4280	14.8	13.7
20+20+35+35+71	1.11	1.11	1.93	1.93	3.92	10.00	2.3	11.5	2660	560	3540	13.1	12.1	1.33	1.33	2.32	2.32	4.70	12.00	3.4	14.5	3110	800	4260	14.7	13.6
20+20+35+42+42	1.26	1.26	2.20	2.64	2.64	10.00	2.3	11.5	2700	470	3600	13.3	12.3	1.51	1.51	2.64	3.17	3.17	12.00	3.4	14.5	3040	680	4260	14.4	13.3
20+20+35+42+50	1.20	1.20	2.10	2.51	2.99	10.00	2.3	11.5	2660	560	3540	13.1	12.1	1.44	1.44	2.51	3.02	3.59	12.00	3.4	14.5	3110	800	4270	14.7	13.6
20+20+35+42+60	1.13	1.13	1.98	2.37	3.39	10.00	2.3	11.5	2660	560	3540	13.1	12.1	1.36	1.36	2.37	2.85	4.06	12.00	3.4	14.5	3110	800	4270	14.7	13.6
20+20+35+50+50	1.14	1.14	2.00	2.86	2.86	10.00	2.3	11.5	2690	650	3490	13.2	12.2	1.37	1.37	2.40	3.43	3.43	12.00	3.4	14.5	3200	940	4290	15.1	14.0
20+20+42+42+42	1.19	1.19	2.54	2.54	2.54	10.00	2.3	11.5	2700	470	3600	13.3	12.3	1.44	1.44	3.04	3.04	3.04	12.00	3.4	14.5	3080	680	4250	14.6	13.5
20+20+42+42+50	1.15	1.15	2.41	2.41	2.88	10.00	2.3	11.5	2660	560	3540	13.1	12.1	1.38	1.38	2.90	2.90	3.44	12.00	3.4	14.5	3110	810	4260	14.7	13.6
20+20+42+50+50	1.10	1.10	2.30	2.75	2.75	10.00	2.3	11.5	2690	650	3490	13.2	12.2	1.32	1.32	2.76	3.30	3.30	12.00	3.4	14.5	3200	950	4330	15.1	14.0
20+25+25+25+25	1.68	2.08	2.08	2.08	2.08	10.00	2.3	11.5	2750	430	3740	13.5	12.5	2.00	2.50	2.50	2.50	2.50	12.00	3.4	14.5	3060	580	4320	14.5	13.4
20+25+25+25+35	1.55	1.92	1.92	1.92	2.69	10.00	2.3	11.5	2690	430	3660	13.2	12.2	1.85	2.31	2.31	2.31	3.22	12.00	3.4	14.5	3040	610	4290	14.4	13.3
20+25+25+25+42	1.47	1.82	1.82	1.82	3.07	10.00	2.3	11.5	2690	430	3660	13.2	12.2	1.75	2.19	2.19	2.19	3.68	12.00	3.4	14.5	3030	610	4280	14.3	13.3
20+25+25+25+50	1.39	1.72	1.72	1.72	3.45	10.00	2.3	11.5	2710	510	3530	13.3	12.3	1.66	2.07	2.07	4.13	4.13	12.00	3.4	14.5	3060	720	4270	14.5	13.4
20+25+25+25+60	1.30	1.61	1.61	1.61	3.87	10.00	2.3	11.5	2710	510	3530	13.3	12.3	1.54	1.94	1.94	1.94	4.64	12.00	3.4	14.5	3060	720	4270	14.5	13.4
20+25+25+25+71	1.20	1.51	1.51	1.51	4.27	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.45	1.81	1.81	1.81	5.12	12.00	3.4	14.5	3090	750	4260	14.6	13.5
20+25+25+35+35	1.42	1.79	1.79	2.50	2.50	10.00	2.3	11.5	2700	460	3670	13.3	12.3	1.72	2.14	2.14	3.00	3.00	12.00	3.4	14.5	3070	640	4260	14.5	13.4
20+25+25+35+42	1.36	1.70	1.70	2.38	2.86	10.00	2.3	11.5	2700	460	3670	13.3	12.3	1.63	2.04	2.04	2.86	3.43	12.00	3.4	14.5	3060	640	4250	14.5	13.4
20+25+25+35+50	1.29	1.61	1.61	2.26	3.23	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.55	1.94	1.94	2.71	3.86	12.00	3.4	14.5	3090	760	4250	14.6	13.5
20+25+25+35+60	1.21	1.52	1.52	2.12	3.63	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.45	1.82	1.82	2.55	4.36	12.00	3.4	14.5	3090	760	4250	14.6	13.5
20+25+25+35+71	1.14	1.42	1.42	1.99	4.03	10.00	2.3	11.5	2660	560	3540	13.1	12.1	1.37	1.70	1.70	2.39	4.84	12.00	3.4	14.5	3080	780	4230	14.6	13.5
20+25+25+42+42	1.30	1.62	1.62	2.73	2.73	10.00	2.3	11.5	2700	470	3670	13.3	12.3	1.56	1.95	1.95	3.27	3.27	12.00	3.4	14.5	3060	650	4230	14.5	13.4
20+25+25+42+50	1.24	1.54	1.54	2.59	3.09	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.49	1.85	1.85	3.11	3.70	12.00	3.4	14.5	3080	760	4240	14.6	13.5
20+25+25+42+60	1.17	1.45	1.45	2.44	3.49	10.00	2.3	11.5	2650	520	3530	13.0	12.0	1.40	1.74	1.74	2.93	4.19	12.00	3.4	14.5	3080	760	4240	14.6	13.5
20+25+25+42+71	1.09	1.37	1.37	2.30	3.87	10.00	2.3	11.5	2660	560	3540	13.1	12.1	1.31	1.64	1.64	2.75	4.66	12.00	3.4	14.5	3080	780	4280	14.6	13.5
20+25+25+50+50	1.18	1.47	1.47	2.94	2.94	10.00	2.3	11.5	2680	610	3480	13.2	12.2	1.42	1.76	1.76	3.53	3.53	12.00	3.4	14.5	3170	900	4310	15.0	13.9
20+25+25+50+60	1.11	1.39	1.39	2.78	3.33	10.00	2.3	11.5	2680	610	3480	13.2	12.2	1.33	1.67	1.67	3.33	4.00	12.00	3.4	14.5	3170	900	4310	15.0	13.9
20+25+35+35+35	1.34	1.67	2.33	2.33	2.33	10.00	2.3	11.5	2700	470	3590	13.3	12.3	1.60	2.00	2.80	2.80	2.80	12.00	3.4	14.5	3050	650	4280	14.4	13.4
20+25+35+35+42	1.27	1.59	2.23	2.23	2.68	10.00	2.3	11.5	2700	470	3590	13.3	12.3	1.53	1.91	2.68	2.68	3.20	12.00	3.4	14.5	3040	670	4270	14.4	13.3
20+25+35+35+50	1.21	1.52	2.12	2.12	3.03	10.00	2.3	11.5	2660	550	35															

CU-2S18SKH: Only Wall-Mounted and Free Multi Indoor Combination

Indoor Unit Combination	Cooling Capacity (kW)						Input Power (W)		Current (A)	
	Room A	Room B	Room C	Room D	Total	min - max	Rated	min - max	220V	240V
1 Room	28	-	-	-	2.80	1.10 - 3.5	0.75	0.22 - 1.00	3.7	3.4
	32	-	-	-	3.20	1.10 - 4.0	0.92	0.22 - 1.22	4.5	4.2
2 Rooms	28 + 28	2.40	2.40	-	4.80	1.50 - 5.8	1.34	0.25 - 1.72	6.5	6.1
	28 + 32	2.30	2.70	-	5.00	1.50 - 5.9	1.52	0.25 - 1.74	7.4	6.9
	32 + 32	2.50	2.50	-	5.00	1.50 - 6.0	1.43	0.25 - 1.78	6.8	6.3

CU-3S27SBH: Only Wall-Mounted and Free Multi Indoor Combination

Indoor Unit Combination	Cooling Capacity (kW)						Input Power (W)		Current (A)	
	Room A	Room B	Room C	Room D	Total	min - max	Rated	min - max	220V	240V
1 Room	28	-	-	-	2.80	1.7 - 3.4	700	380 - 890	3.8	3.5
	32	-	-	-	3.20	1.7 - 4.0	800	380 - 1,200	4.3	3.9
	40	-	-	-	4.00	1.7 - 4.8	1,180	380 - 1,480	6.1	5.6
	50	-	-	-	5.00	1.9 - 5.8	1,460	400 - 1,890	7.4	6.8
2 Rooms	28 + 28	2.80	2.80	-	5.60	1.7 - 6.4	1,750	420 - 2,600	8.7	8.0
	28 + 32	2.80	3.20	-	6.00	1.7 - 6.5	2,010	420 - 2,600	10.0	9.2
	28 + 40	2.80	4.00	-	6.80	2.5 - 7.3	2,420	550 - 3,330	12.0	11.0
	28 + 50	2.69	4.81	-	7.50	2.7 - 7.7	2,810	530 - 3,310	13.9	12.7
	32 + 32	3.20	3.20	-	6.40	2.3 - 7.1	2,290	570 - 3,350	11.3	10.4
	32 + 40	3.20	4.00	-	7.20	2.5 - 7.4	2,770	550 - 3,330	13.7	12.5
	32 + 50	2.93	4.57	-	7.50	2.8 - 7.7	2,760	530 - 3,310	13.6	12.5
	40 + 40	3.75	3.75	-	7.50	2.7 - 7.6	2,870	540 - 3,310	14.2	13.0
	40 + 50	3.33	4.17	-	7.50	2.8 - 7.8	2,600	530 - 3,300	12.8	11.8
	50 + 50	3.75	3.75	-	7.50	2.9 - 8.0	2,440	520 - 3,300	12.1	11.1
3 Rooms	28 + 28 + 28	2.50	2.50	2.50	7.50	2.4 - 7.6	2,740	580 - 3,170	13.5	12.4
	28 + 28 + 32	2.39	2.39	2.72	7.50	2.4 - 7.7	2,690	580 - 3,170	13.3	12.2
	28 + 28 + 40	2.19	2.19	3.12	7.50	2.6 - 8.0	2,490	600 - 3,260	12.3	11.3
	28 + 28 + 50	1.98	1.98	3.54	7.50	2.8 - 8.0	2,250	600 - 2,910	11.1	10.2
	28 + 32 + 32	2.28	2.61	2.61	7.50	2.4 - 7.7	2,690	580 - 3,180	13.3	12.2
	28 + 32 + 40	2.10	2.40	3.00	7.50	2.6 - 8.0	2,450	600 - 3,200	12.1	11.1
	28 + 32 + 50	1.91	2.18	3.41	7.50	2.8 - 8.0	2,250	600 - 2,910	11.1	10.2
	28 + 40 + 40	1.94	2.78	2.78	7.50	2.7 - 8.0	2,290	600 - 3,020	11.3	10.4
	28 + 40 + 50	1.78	2.54	3.18	7.50	2.8 - 8.0	2,170	580 - 2,760	10.7	9.8
	28 + 50 + 50	1.64	2.93	2.93	7.50	2.8 - 8.0	2,070	520 - 2,650	10.2	9.4
	32 + 32 + 32	2.50	2.50	2.50	7.50	2.4 - 7.7	2,650	590 - 3,190	13.1	12.0
	32 + 32 + 40	2.31	2.31	2.88	7.50	2.6 - 8.0	2,450	600 - 3,210	12.1	11.1
	32 + 32 + 50	2.11	2.11	3.28	7.50	2.8 - 8.0	2,250	600 - 2,920	11.1	10.2
	32 + 40 + 40	2.14	2.68	2.68	7.50	2.8 - 8.0	2,290	600 - 2,960	11.3	10.4
	32 + 40 + 50	1.97	2.46	3.07	7.50	2.8 - 8.0	2,170	580 - 2,760	10.7	9.8
	32 + 50 + 50	1.82	2.84	2.84	7.50	2.8 - 8.0	2,060	520 - 2,650	10.2	9.4
40 + 40 + 40	2.50	2.50	2.50	7.50	2.8 - 8.0	2,170	590 - 2,820	10.7	9.8	
40 + 40 + 50	2.31	2.31	2.88	7.50	2.8 - 8.0	2,070	540 - 2,650	10.2	9.4	

• Specification based on JIS C 9612 standard.
• A minimum of 2 indoor units must be connected.

CU-3S28SBH: Only Wall-Mounted and Free Multi Indoor Combination

Indoor Unit Combination	Cooling Capacity (kW)						Input Power (W)		Current (A)		
	Room A	Room B	Room C	Room D	Total	min - max	Rated	min - max	220V	240V	
1 Room	28	-	-	--	2.80	1.7 - 3.4	700	380 - 890	3.7	3.4	
	32	-	-	-	3.20	1.7 - 4.0	800	380 - 1,200	4.2	3.9	
	40	-	-	-	4.00	1.7 - 4.8	1,180	380 - 1,480	6.0	5.5	
	50	-	-	-	5.00	1.9 - 5.8	1,460	400 - 1,890	7.3	6.7	
	60	-	-	-	6.00	1.9 - 6.2	1,920	400 - 2,070	9.3	8.6	
2 Rooms	28 + 28	2.80	2.80	-	5.60	1.7 - 6.7	1,750	420 - 2,340	8.6	7.9	
	28 + 32	2.80	3.20	-	6.00	1.7 - 6.7	2,010	420 - 2,340	9.8	9.0	
	28 + 40	2.80	4.00	-	6.80	2.5 - 7.6	2,420	550 - 2,990	11.8	10.8	
	28 + 50	2.69	4.81	-	7.50	2.7 - 8.0	2,810	530 - 2,980	13.7	12.6	
	28 + 60	2.39	5.11	-	7.50	2.7 - 8.0	2,810	530 - 2,980	13.7	12.6	
	32 + 32	3.20	3.20	-	6.40	2.3 - 7.4	2,290	570 - 3,010	11.2	10.3	
	32 + 40	3.20	4.00	-	7.20	2.5 - 7.7	2,770	550 - 2,990	13.5	12.4	
	32 + 50	2.93	4.57	-	7.50	2.8 - 8.0	2,760	530 - 2,970	13.5	12.4	
	32 + 60	2.61	4.89	-	7.50	2.8 - 8.0	2,760	530 - 2,970	13.5	12.4	
	40 + 40	3.75	3.75	-	7.50	2.7 - 7.9	2,870	540 - 2,980	14.0	12.9	
	40 + 50	3.33	4.17	-	7.50	2.8 - 8.1	2,600	530 - 2,970	12.7	11.6	
	40 + 60	3.00	4.50	-	7.50	2.8 - 8.1	2,600	530 - 2,970	12.7	11.6	
	50 + 50	3.75	3.75	-	7.50	2.9 - 8.3	2,440	520 - 2,970	11.9	10.9	
	50 + 60	3.41	4.09	-	7.50	2.9 - 8.3	2,440	520 - 2,970	11.9	10.9	
	60 + 60	3.75	3.75	-	7.50	2.9 - 8.3	2,440	520 - 2,970	11.9	10.9	
	3 Rooms	28 + 28 + 28	2.50	2.50	2.50	7.50	2.4 - 7.9	2,740	580 - 2,840	13.4	12.3
		28 + 28 + 32	2.39	2.39	2.72	7.50	2.4 - 8.0	2,690	580 - 2,850	13.1	12.1
28 + 28 + 40		2.19	2.19	3.12	7.50	2.6 - 8.4	2,490	600 - 2,930	12.2	11.2	
28 + 28 + 50		1.98	1.98	3.54	7.50	2.8 - 8.8	2,250	600 - 3,010	11.0	10.1	
28 + 28 + 60		1.81	1.81	3.88	7.50	2.8 - 8.8	2,250	600 - 3,010	11.0	10.1	
28 + 32 + 32		2.28	2.61	2.61	7.50	2.4 - 8.0	2,690	580 - 2,860	13.1	12.1	
28 + 32 + 40		2.10	2.40	3.00	7.50	2.6 - 8.4	2,450	600 - 2,930	12.0	11.0	
28 + 32 + 50		1.91	2.18	3.41	7.50	2.8 - 8.8	2,250	600 - 3,020	11.0	10.1	
28 + 32 + 60		1.75	2.00	3.75	7.50	2.8 - 8.8	2,250	600 - 3,020	11.0	10.1	
28 + 40 + 40		1.94	2.78	2.78	7.50	2.7 - 8.7	2,290	600 - 3,000	11.2	10.3	
28 + 40 + 50		1.78	2.54	3.18	7.50	2.8 - 9.0	2,170	580 - 3,050	10.6	9.7	
28 + 40 + 60		1.64	2.34	3.52	7.50	2.8 - 9.0	2,170	580 - 3,050	10.6	9.7	
28 + 50 + 50		1.64	2.93	2.93	7.50	2.8 - 9.0	2,070	520 - 2,830	10.1	9.3	
32 + 32 + 32		2.50	2.50	2.50	7.50	2.4 - 8.0	2,650	590 - 2,860	13.0	11.9	
32 + 32 + 40		2.31	2.31	2.88	7.50	2.6 - 8.4	2,450	600 - 2,940	12.0	11.0	
32 + 32 + 50		2.11	2.11	3.28	7.50	2.8 - 8.8	2,250	600 - 3,020	11.0	10.1	
32 + 32 + 60		1.94	1.94	3.62	7.50	2.8 - 8.8	2,250	600 - 3,020	11.0	10.1	
32 + 40 + 40		2.14	2.68	2.68	7.50	2.8 - 8.7	2,290	600 - 3,000	11.2	10.3	
32 + 40 + 50		1.97	2.46	3.07	7.50	2.8 - 9.0	2,170	580 - 3,060	10.6	9.7	
32 + 40 + 60		1.82	2.27	3.41	7.50	2.8 - 9.0	2,170	580 - 3,060	10.6	9.7	
32 + 50 + 50	1.82	2.84	2.84	7.50	2.8 - 9.0	2,060	520 - 2,830	10.1	9.2		
40 + 40 + 40	2.50	2.50	2.50	7.50	2.8 - 9.0	2,170	590 - 3,040	10.6	9.7		
40 + 40 + 50	2.31	2.31	2.88	7.50	2.8 - 9.0	2,070	540 - 2,830	10.1	9.3		

• Specification based on JIS C 9612 standard.
• A minimum of 2 indoor units must be connected.

CU-4S27SBH: Only Wall-Mounted and Free Multi Indoor Combination

Indoor Unit Combination	Cooling Capacity (kW)						Input Power (W)		Current (A)			
	Room A	Room B	Room C	Room D	Total	min - max	Rated	min - max	220V	240V		
1 Room	28	2.800	-	-	-	2.80	1.7 - 3.4	700	380 - 890	3.8	3.5	
	32	3.200	-	-	-	3.20	1.7 - 4.0	800	380 - 1,200	4.3	3.9	
	40	4.000	-	-	-	4.00	1.7 - 4.8	1,180	380 - 1,480	6.1	5.6	
	50	5.000	-	-	-	5.00	1.9 - 5.8	1,460	400 - 1,890	7.4	6.8	
2 Rooms	28 + 28	2.800	2.800	-	-	5.60	1.7 - 6.4	1,750	420 - 2,600	8.7	8.0	
	28 + 32	2.800	3.200	-	-	6.00	1.7 - 6.5	2,010	420 - 2,600	10.0	9.2	
	28 + 40	2.800	4.000	-	-	6.80	2.5 - 7.3	2,420	550 - 3,330	12.0	11.0	
	28 + 50	2.690	4.810	-	-	7.50	2.7 - 7.7	2,810	530 - 3,310	13.9	12.7	
	32 + 32	3.200	3.200	-	-	6.40	2.3 - 7.1	2,290	570 - 3,350	11.3	10.4	
	32 + 40	3.200	4.000	-	-	7.20	2.5 - 7.4	2,770	550 - 3,330	13.7	12.5	
	32 + 50	2.930	4.570	-	-	7.50	2.8 - 7.7	2,760	530 - 3,310	13.6	12.5	
	40 + 40	3.750	3.750	-	-	7.50	2.7 - 7.6	2,870	540 - 3,310	14.2	13.0	
	40 + 50	3.330	4.170	-	-	7.50	2.8 - 7.8	2,600	530 - 3,300	12.8	11.8	
	50 + 50	3.750	3.750	-	-	7.50	2.9 - 8.0	2,440	520 - 3,300	12.1	11.1	
3 Rooms	28 + 28 + 28	2.500	2.500	2.500	-	7.50	2.4 - 7.6	2,740	580 - 3,170	13.5	12.4	
	28 + 28 + 32	2.390	2.390	2.720	-	7.50	2.4 - 7.7	2,690	580 - 3,170	13.3	12.2	
	28 + 28 + 40	2.190	2.190	3.120	-	7.50	2.6 - 8.0	2,490	600 - 3,260	12.3	11.3	
	28 + 28 + 50	1.980	1.980	3.540	-	7.50	2.8 - 8.0	2,250	600 - 2,910	11.1	10.2	
	28 + 32 + 32	2.280	2.610	2.610	-	7.50	2.4 - 7.7	2,690	580 - 3,180	13.3	12.2	
	28 + 32 + 40	2.100	2.400	3.000	-	7.50	2.6 - 8.0	2,450	600 - 3,200	12.1	11.1	
	28 + 32 + 50	1.910	2.180	3.410	-	7.50	2.8 - 8.0	2,250	600 - 2,910	11.1	10.2	
	28 + 40 + 40	1.940	2.780	2.780	-	7.50	2.7 - 8.0	2,290	600 - 3,020	11.3	10.4	
	28 + 40 + 50	1.780	2.540	3.180	-	7.50	2.8 - 8.0	2,170	580 - 2,760	10.7	9.8	
	28 + 50 + 50	1.640	2.930	2.930	-	7.50	2.8 - 8.0	2,070	520 - 2,650	10.2	9.4	
	32 + 32 + 32	2.500	2.500	2.500	-	7.50	2.4 - 7.7	2,650	590 - 3,190	13.1	12.0	
	32 + 32 + 40	2.310	2.310	2.880	-	7.50	2.6 - 8.0	2,450	600 - 3,210	12.1	11.1	
	32 + 32 + 50	2.110	2.110	3.280	-	7.50	2.8 - 8.0	2,250	600 - 2,920	11.1	10.2	
	32 + 40 + 40	2.140	2.680	2.680	-	7.50	2.8 - 8.0	2,290	600 - 2,960	11.3	10.4	
	32 + 40 + 50	1.970	2.460	3.070	-	7.50	2.8 - 8.0	2,170	580 - 2,760	10.7	9.8	
	32 + 50 + 50	1.820	2.840	2.840	-	7.50	2.8 - 8.0	2,060	520 - 2,650	10.2	9.4	
	40 + 40 + 40	2.500	2.500	2.500	-	7.50	2.8 - 8.0	2,170	590 - 2,820	10.7	9.8	
	40 + 40 + 50	2.310	2.310	2.880	-	7.50	2.8 - 8.0	2,070	540 - 2,650	10.2	9.4	
	4 Rooms	28 + 28 + 28 + 28	1.875	1.875	1.875	1.875	7.50	2.8 - 8.0	2,060	520 - 2,650	10.2	9.4
		28 + 28 + 28 + 32	1.810	1.810	1.810	2.070	7.50	2.8 - 8.0	2,060	520 - 2,650	10.2	9.4
28 + 28 + 28 + 40		1.690	1.690	1.690	2.430	7.50	2.8 - 8.0	2,060	520 - 2,590	10.2	9.4	
28 + 28 + 28 + 50		1.570	1.570	1.570	2.790	7.50	2.8 - 8.0	2,060	520 - 2,530	10.2	9.4	
28 + 28 + 32 + 32		1.750	1.750	2.000	2.000	7.50	2.8 - 8.0	2,060	520 - 2,650	10.2	9.4	
28 + 28 + 32 + 40		1.640	1.640	1.880	2.340	7.50	2.8 - 8.0	2,060	520 - 2,590	10.2	9.4	
28 + 32 + 32 + 32		1.680	1.940	1.940	1.940	7.50	2.8 - 8.0	2,060	520 - 2,650	10.2	9.4	
28 + 32 + 32 + 40		1.590	1.820	1.820	2.270	7.50	2.8 - 8.0	2,060	520 - 2,590	10.2	9.4	
32 + 32 + 32 + 32		1.875	1.875	1.875	1.875	7.50	2.8 - 8.0	2,060	520 - 2,590	10.2	9.4	

• Specification based on JIS C 9612 standard.
• A minimum of 2 indoor units must be connected.

CU-4S34SBH: Only Wall-Mounted and Free Multi Indoor Combination

Indoor Unit Combination	Cooling Capacity (kW)						Input Power (W)		Current (A)		
	Room A	Room B	Room C	Room D	Total	min - max	Rated	min - max	220V	240V	
1 Room	28	2.80	-	-	-	2.80	1.7 - 3.4	700	380 - 890	3.6	3.3
	32	3.20	-	-	-	3.20	1.7 - 4.0	800	380 - 1,200	4.1	3.8
	40	4.00	-	-	-	4.00	1.7 - 4.8	1,240	380 - 1,480	6.0	5.5
	50	5.00	-	-	-	5.00	1.9 - 5.8	1,550	400 - 1,890	7.5	6.9
	60	6.00	-	-	-	6.00	1.9 - 6.2	2,030	400 - 2,070	9.6	8.8
	70	7.00	-	-	-	7.00	2.0 - 7.2	2,490	400 - 2,770	11.8	10.8
	2 Rooms	28 + 28	2.80	2.80	-	-	5.60	2.4 - 5.8	1,740	300 - 1,860	8.5
28 + 32		2.80	3.20	-	-	6.00	2.4 - 6.7	1,920	300 - 2,360	9.3	8.5
28 + 40		2.80	4.00	-	-	6.80	2.4 - 7.2	2,420	300 - 2,760	11.7	10.7
28 + 50		2.80	5.00	-	-	7.80	2.4 - 8.6	2,680	280 - 3,330	12.9	11.8
28 + 60		2.80	6.00	-	-	8.80	2.5 - 9.1	3,450	310 - 3,640	16.6	15.2
28 + 70		2.80	7.00	-	-	9.80	2.5 - 10.1	4,140	310 - 4,620	20.0	18.3
32 + 32		3.20	3.20	-	-	6.40	2.4 - 7.2	2,100	290 - 2,620	10.1	9.3
32 + 40		3.20	4.00	-	-	7.20	2.4 - 8.1	2,620	290 - 3,390	12.6	11.6
32 + 50		3.20	5.00	-	-	8.20	2.5 - 9.1	2,890	310 - 3,490	13.9	12.8
32 + 60		3.20	6.00	-	-	9.20	2.5 - 10.0	3,570	310 - 4,460	17.2	15.8
32 + 70		3.14	6.86	-	-	10.00	2.5 - 10.4	4,220	310 - 4,800	20.3	18.6
40 + 40		4.00	4.00	-	-	8.00	2.5 - 8.6	3,240	320 - 3,930	15.6	14.3
40 + 50		4.00	5.00	-	-	9.00	2.5 - 10.0	3,460	310 - 4,460	16.7	15.3
40 + 60		4.00	6.00	-	-	10.00	2.5 - 10.4	4,460	310 - 4,790	21.5	19.7
40 + 70		3.64	6.36	-	-	10.00	2.5 - 10.4	4,150	310 - 4,800	20.0	18.3
50 + 50		5.00	5.00	-	-	10.00	2.5 - 10.4	3,610	300 - 4,000	17.4	16.0
50 + 60		4.55	5.45	-	-	10.00	2.5 - 10.4	3,610	300 - 4,000	17.4	16.0
50 + 70		4.17	5.83	-	-	10.00	2.5 - 10.4	3,470	300 - 3,850	16.7	15.3
60 + 60		5.00	5.00	-	-	10.00	2.5 - 10.4	3,610	300 - 4,000	17.4	16.0
60 + 70		4.62	5.38	-	-	10.00	2.5 - 10.4	3,470	300 - 3,850	16.7	15.3
70 + 70	5.00	5.00	-	-	10.00	2.5 - 10.4	3,320	330 - 3,690	16.0	14.7	
3 Rooms	28 + 28 + 28	2.80	2.80	2.80	-	8.40	2.9 - 8.7	2,750	360 - 2,880	13.3	12.2
	28 + 28 + 32	2.80	2.80	3.20	-	8.80	2.9 - 9.6	2,880	390 - 3,320	13.9	12.7
	28 + 28 + 40	2.80	2.80	4.00	-	9.60	2.9 - 10.1	3,320	390 - 3,770	16.0	14.7
	28 + 28 + 50	2.64	2.64	4.72	-	10.00	2.9 - 10.7	3,180	390 - 3,770	15.3	14.1
	28 + 28 + 60	2.41	2.41	5.18	-	10.00	2.9 - 10.7	3,180	390 - 3,770	15.3	14.1
	28 + 28 + 70	2.22	2.22	5.56	-	10.00	2.9 - 10.7	3,110	390 - 3,620	15.0	13.7
	28 + 32 + 32	2.80	3.20	3.20	-	9.20	2.9 - 10.1	2,990	390 - 3,690	14.4	13.2
	28 + 32 + 40	2.80	3.20	4.00	-	10.00	2.9 - 10.7	3,540	390 - 4,320	17.1	15.6
	28 + 32 + 50	2.54	2.91	4.55	-	10.00	2.9 - 10.7	3,110	390 - 3,700	15.0	13.7
	28 + 32 + 60	2.33	2.67	5.00	-	10.00	2.9 - 10.7	3,110	390 - 3,700	15.0	13.7
	28 + 32 + 70	2.15	2.46	5.39	-	10.00	2.9 - 10.7	3,040	420 - 3,540	14.7	13.4
	28 + 40 + 40	2.60	3.70	3.70	-	10.00	2.9 - 10.7	3,540	390 - 4,320	17.1	15.6
	28 + 40 + 50	2.37	3.39	4.24	-	10.00	2.9 - 10.7	3,110	390 - 3,620	15.0	13.7
	28 + 40 + 60	2.18	3.13	4.69	-	10.00	2.9 - 10.7	3,110	390 - 3,620	15.0	13.7
	28 + 40 + 70	2.03	2.90	5.07	-	10.00	2.9 - 10.7	2,970	420 - 3,540	14.3	13.1
	28 + 50 + 50	2.18	3.91	3.91	-	10.00	2.9 - 10.7	2,830	430 - 3,250	13.6	12.5
	28 + 50 + 60	2.03	3.62	4.35	-	10.00	2.9 - 10.7	2,830	430 - 3,250	13.6	12.5
	28 + 50 + 70	1.89	3.38	4.73	-	10.00	2.9 - 10.7	2,760	460 - 3,180	13.3	12.2
	28 + 60 + 60	1.90	4.05	4.05	-	10.00	2.9 - 10.7	2,830	430 - 3,250	13.6	12.5
	28 + 60 + 70	1.77	3.80	4.43	-	10.00	2.9 - 10.7	2,760	460 - 3,180	13.3	12.2
	28 + 70 + 70	1.66	4.17	4.17	-	10.00	2.9 - 10.7	2,690	460 - 3,110	13.0	11.9
	32 + 32 + 32	3.20	3.20	3.20	-	9.60	2.9 - 10.7	3,110	390 - 3,540	15.0	13.7
	32 + 32 + 40	3.08	3.08	3.84	-	10.00	2.9 - 10.7	3,470	3		


CU-4S34SBH: Only Wall-Mounted and Free Multi Indoor Combination

Indoor Unit Combination	Cooling Capacity (kW)					Input Power (W)		Current (A)			
	Room A	Room B	Room C	Room D	Total	min - max	Rated	min - max	220V	240V	
3 Rooms	32 + 70 + 70	1.86	4.07	4.07	-	10.00	2.9 ~ 10.7	2,700	470 ~ 3,110	13.0	11.9
	40 + 40 + 40	3.33	3.33	3.33	-	9.99	2.9 ~ 10.7	3,390	390 ~ 4,080	16.3	15.0
	40 + 40 + 50	3.08	3.08	3.84	-	10.00	2.9 ~ 10.7	2,970	420 ~ 3,540	14.3	13.1
	40 + 40 + 60	2.86	2.86	4.28	-	10.00	2.9 ~ 10.7	2,970	420 ~ 3,540	14.3	13.1
	40 + 40 + 70	2.67	2.67	4.66	-	10.00	2.9 ~ 10.7	2,900	420 ~ 3,400	14.0	12.8
	40 + 50 + 50	2.86	3.57	3.57	-	10.00	2.9 ~ 10.7	2,760	460 ~ 3,180	13.3	12.2
	40 + 50 + 60	2.67	3.33	4.00	-	10.00	2.9 ~ 10.7	2,760	460 ~ 3,180	13.3	12.2
	40 + 50 + 70	2.49	3.13	4.38	-	10.00	2.9 ~ 10.7	2,690	460 ~ 3,110	13.0	11.9
	40 + 60 + 60	2.50	3.75	3.75	-	10.00	2.9 ~ 10.7	2,760	460 ~ 3,180	13.3	12.2
	40 + 60 + 70	2.35	3.53	4.12	-	10.00	2.9 ~ 10.7	2,690	460 ~ 3,110	13.0	11.9
	50 + 50 + 50	3.33	3.33	3.33	-	9.99	2.9 ~ 10.7	2,570	510 ~ 2,970	12.4	11.4
	50 + 50 + 60	3.13	3.13	3.74	-	10.00	2.9 ~ 10.7	2,630	510 ~ 2,970	12.7	11.6
	50 + 50 + 70	2.94	2.94	4.12	-	10.00	2.9 ~ 10.7	2,570	510 ~ 2,970	12.4	11.4
	50 + 60 + 60	2.94	3.53	3.53	-	10.00	2.9 ~ 10.7	2,630	510 ~ 2,970	12.7	11.6
	4 Rooms	28 + 28 + 28 + 28	2.50	2.50	2.50	2.50	10.00	2.9 ~ 10.6	3,220	420 ~ 3,770	15.5
28 + 28 + 28 + 32		2.41	2.41	2.41	2.77	10.00	2.9 ~ 10.6	3,150	420 ~ 3,680	15.2	13.9
28 + 28 + 28 + 40		2.26	2.26	2.26	3.22	10.00	2.9 ~ 10.8	3,150	430 ~ 3,850	15.2	13.9
28 + 28 + 28 + 50		2.09	2.09	2.09	3.73	10.00	2.9 ~ 10.8	2,930	470 ~ 3,520	14.1	12.9
28 + 28 + 28 + 60		1.94	1.94	1.94	4.18	10.00	2.9 ~ 11.0	2,930	470 ~ 3,690	14.1	12.9
28 + 28 + 28 + 70		1.82	1.82	1.82	4.54	10.00	2.9 ~ 11.0	2,930	500 ~ 3,610	14.1	12.9
28 + 28 + 32 + 32		2.33	2.33	2.67	2.67	10.00	2.9 ~ 10.6	3,070	430 ~ 3,600	14.8	13.6
28 + 28 + 32 + 40		2.19	2.19	2.49	3.13	10.00	2.9 ~ 10.8	3,070	430 ~ 3,770	14.8	13.6
28 + 28 + 32 + 50		2.03	2.03	2.32	3.62	10.00	2.9 ~ 10.8	2,930	500 ~ 3,440	14.1	12.9
28 + 28 + 32 + 60		1.89	1.89	2.16	4.06	10.00	2.9 ~ 11.0	2,930	500 ~ 3,610	14.1	12.9
28 + 28 + 32 + 70		1.77	1.77	2.03	4.43	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6
28 + 28 + 40 + 40		2.06	2.06	2.94	2.94	10.00	2.9 ~ 10.8	3,070	430 ~ 3,770	14.8	13.6
28 + 28 + 40 + 50		1.92	1.92	2.74	3.42	10.00	2.9 ~ 11.0	2,930	500 ~ 3,610	14.1	12.9
28 + 28 + 40 + 60		1.79	1.79	2.56	3.86	10.00	2.9 ~ 11.0	2,930	500 ~ 3,610	14.1	12.9
28 + 28 + 40 + 70		1.69	1.69	2.40	4.22	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6
28 + 28 + 50 + 50		1.79	1.79	3.21	3.21	10.00	2.9 ~ 11.0	2,800	560 ~ 3,460	13.5	12.4
28 + 28 + 50 + 60		1.69	1.69	3.01	3.61	10.00	2.9 ~ 11.2	2,800	560 ~ 3,540	13.5	12.4
28 + 32 + 32 + 32		2.26	2.58	2.58	2.58	10.00	2.9 ~ 10.8	3,070	460 ~ 3,680	14.8	13.6
28 + 32 + 32 + 40		2.12	2.42	2.42	3.04	10.00	2.9 ~ 10.8	3,070	460 ~ 3,680	14.8	13.6
28 + 32 + 32 + 50		1.97	2.25	2.25	3.53	10.00	2.9 ~ 11.0	2,860	510 ~ 3,610	13.8	12.6
28 + 32 + 32 + 60		1.83	2.11	2.11	3.95	10.00	2.9 ~ 11.0	2,860	510 ~ 3,610	13.8	12.6
28 + 32 + 32 + 70		1.72	1.98	1.98	4.32	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6
28 + 32 + 40 + 40		1.99	2.29	2.86	2.86	10.00	2.9 ~ 10.8	3,070	460 ~ 3,680	14.8	13.6
28 + 32 + 40 + 50		1.87	2.13	2.67	3.33	10.00	2.9 ~ 11.0	2,860	510 ~ 3,530	13.8	12.6
28 + 32 + 40 + 60		1.75	2.00	2.50	3.75	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6
28 + 32 + 40 + 70		1.65	1.88	2.35	4.12	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6
28 + 32 + 50 + 50		1.74	2.00	3.13	3.13	10.00	2.9 ~ 11.2	2,800	560 ~ 3,540	13.5	12.4
28 + 32 + 50 + 60		1.65	1.88	2.94	3.53	10.00	2.9 ~ 11.2	2,800	560 ~ 3,540	13.5	12.4
28 + 40 + 40 + 40		1.90	2.70	2.70	2.70	10.00	2.9 ~ 11.0	3,000	460 ~ 3,770	14.5	13.3
28 + 40 + 40 + 50		1.77	2.53	2.53	3.17	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6
28 + 40 + 40 + 60		1.67	2.38	2.38	3.57	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6
28 + 40 + 50 + 50		1.66	2.38	2.98	2.98	10.00	2.9 ~ 11.2	2,800	560 ~ 3,540	13.5	12.4
32 + 32 + 32 + 32		2.50	2.50	2.50	2.50	10.00	2.9 ~ 10.8	3,000	460 ~ 3,600	14.5	13.3
32 + 32 + 32 + 40		2.35	2.35	2.35	2.95	10.00	2.9 ~ 10.8	3,000	460 ~ 3,600	14.5	13.3
32 + 32 + 32 + 50		2.19	2.19	2.19	3.43	10.00	2.9 ~ 11.0	2,860	510 ~ 3,530	13.8	12.6
32 + 32 + 32 + 60		2.05	2.05	2.05	3.85	10.00	2.9 ~ 11.0	2,860	510 ~ 3,530	13.8	12.6
32 + 32 + 32 + 70	1.93	1.93	1.93	4.21	10.00	2.9 ~ 11.2	2,860	520 ~ 3,610	13.8	12.6	
32 + 32 + 40 + 40	2.22	2.22	2.78	2.78	10.00	2.9 ~ 11.0	3,000	460 ~ 3,770	14.5	13.3	
32 + 32 + 40 + 50	2.08	2.08	2.59	3.25	10.00	2.9 ~ 11.0	2,860	510 ~ 3,530	13.8	12.6	
32 + 32 + 40 + 60	1.95	1.95	2.44	3.66	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6	
32 + 32 + 40 + 70	1.84	1.84	2.30	4.02	10.00	2.9 ~ 11.2	2,860	550 ~ 3,610	13.8	12.6	
32 + 32 + 50 + 50	1.95	1.95	3.05	3.05	10.00	2.9 ~ 11.2	2,800	600 ~ 3,540	13.5	12.4	
32 + 32 + 50 + 60	1.84	1.84	2.87	3.45	10.00	2.9 ~ 11.2	2,800	600 ~ 3,540	13.5	12.4	
32 + 40 + 40 + 40	2.11	2.63	2.63	2.63	10.00	2.9 ~ 11.0	3,000	460 ~ 3,770	14.5	13.3	
32 + 40 + 40 + 50	1.97	2.47	2.47	3.09	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6	
32 + 40 + 40 + 60	1.85	2.33	2.33	3.49	10.00	2.9 ~ 11.2	2,860	510 ~ 3,690	13.8	12.6	
32 + 40 + 50 + 50	1.85	2.33	2.91	2.91	10.00	2.9 ~ 11.2	2,810	600 ~ 3,540	13.5	12.4	
40 + 40 + 40 + 40	2.50	2.50	2.50	2.50	10.00	2.9 ~ 11.2	3,000	470 ~ 3,850	14.5	13.3	
40 + 40 + 40 + 50	2.35	2.35	2.35	2.95	10.00	2.9 ~ 11.2	2,860	520 ~ 3,610	13.8	12.6	

• Specification based on JIS C 9612 standard.
• A minimum of 2 indoor units must be connected.


Wall-mounted

CS-MRZ16WKH-8/ CS-MRZ20WKH-8/ CS-MRZ25WKH-8/
CS-MRZ35WKH-8/ CS-MRZ42WKH-8/ CS-MRZ50WKH-8

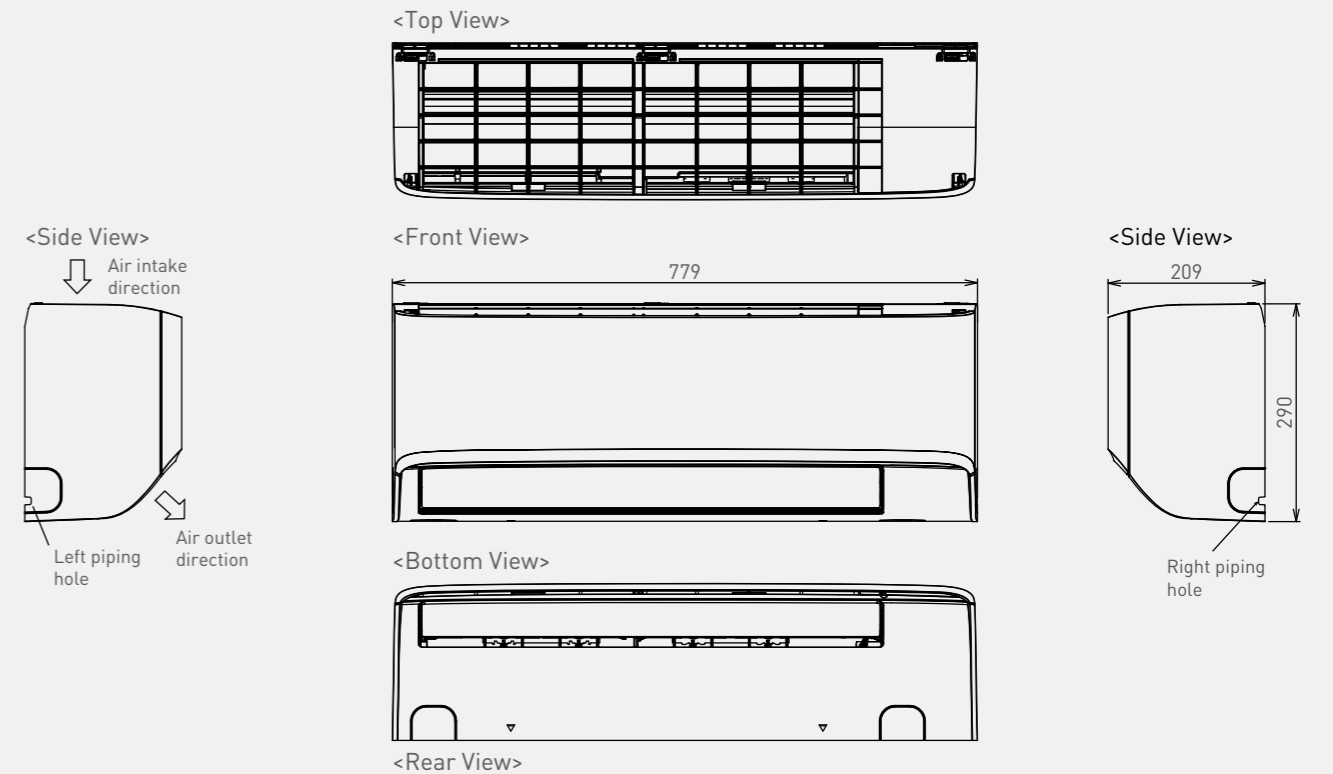

Unit: mm


CS-MRZ60WKH-8/ CS-MRZ71WKH-8

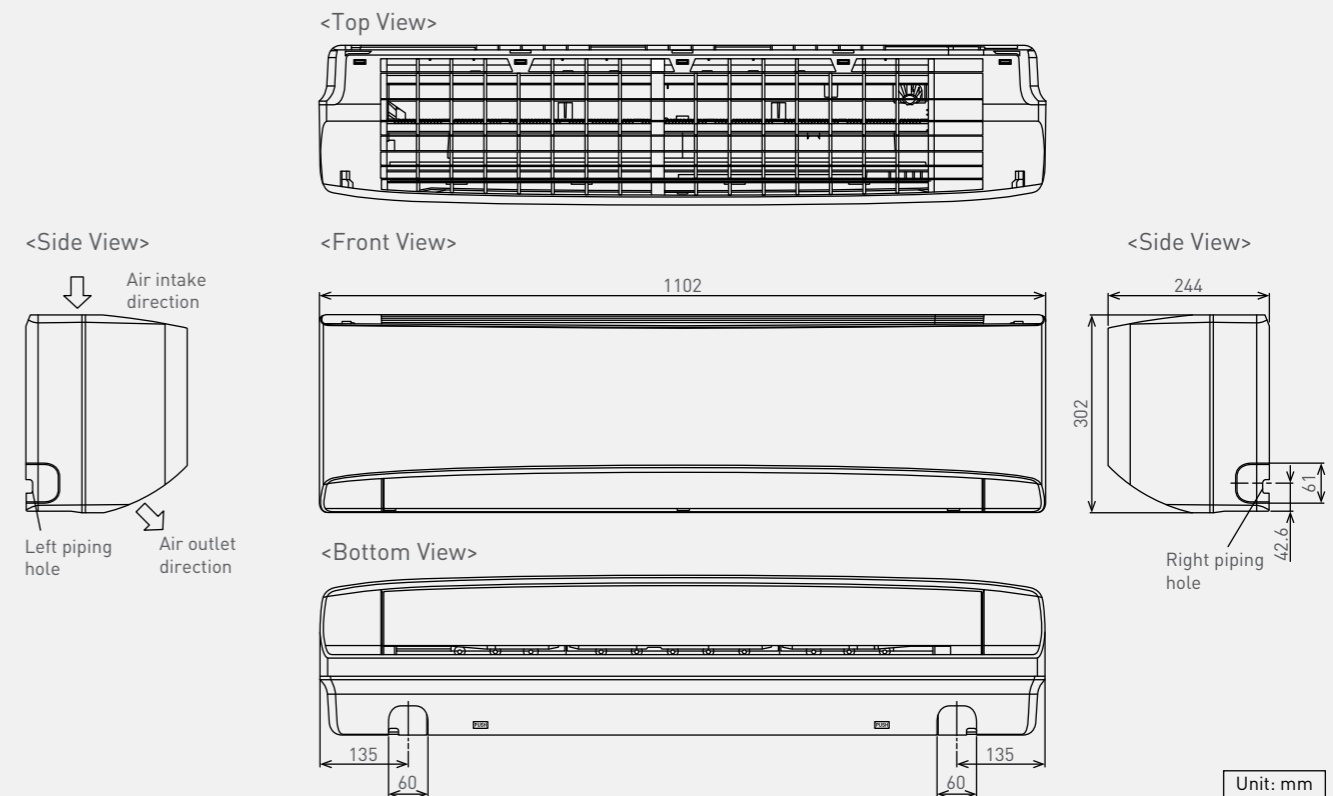


Unit: mm

Wall-mounted

CS-MPS9SKH/ CS-MPS12SKH/ CS-MPS15SKH

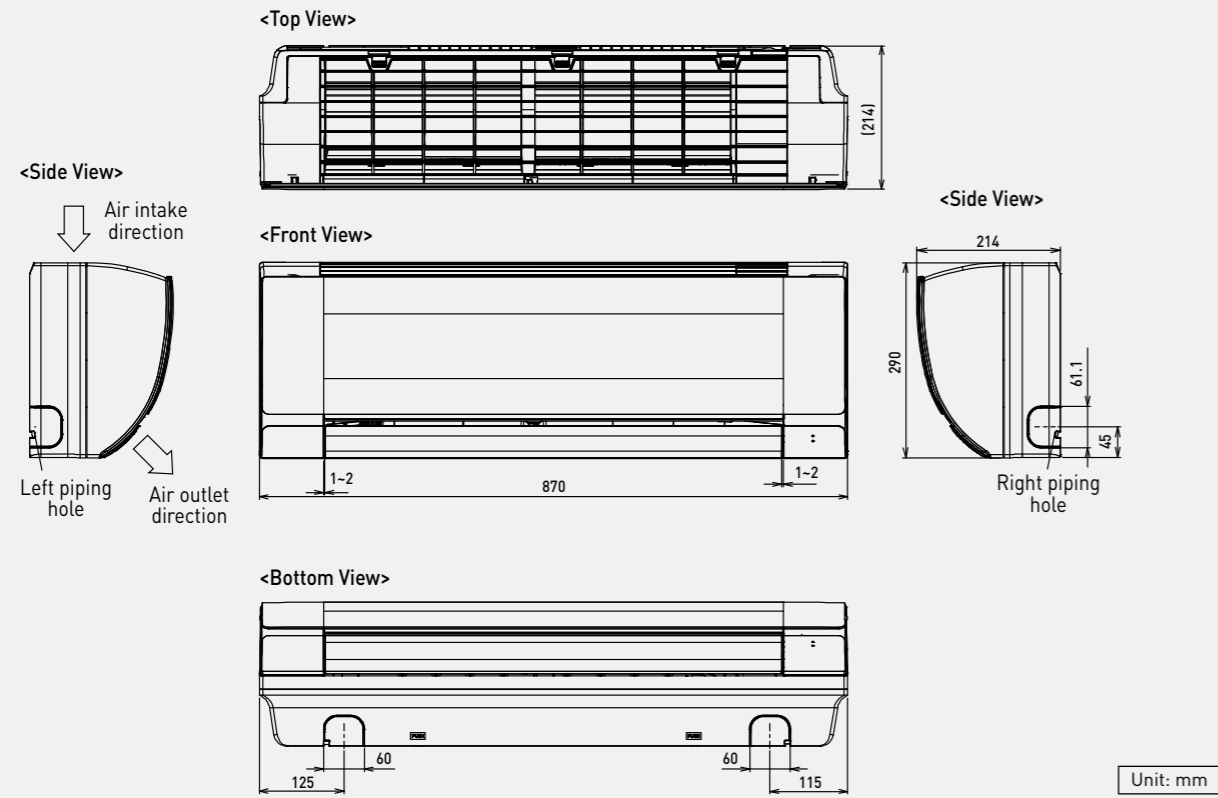


CS-MPS18SKH/ CS-MPS24SKH/ CS-MPS28SKH

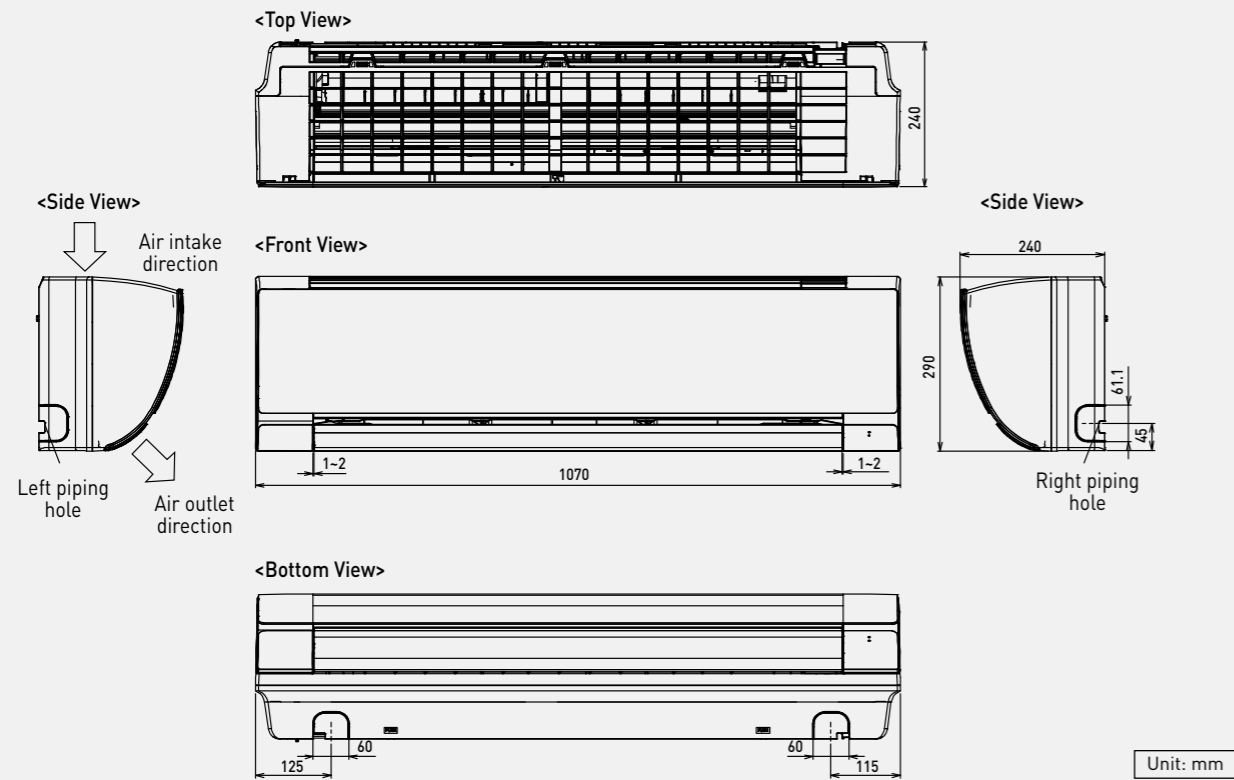

Slim Ducted

CS-MZ25WD3H8A/ CS-MZ35WD3H8A/
 CS-MZ50WD3H8A/ CS-MZ60WD3H8A

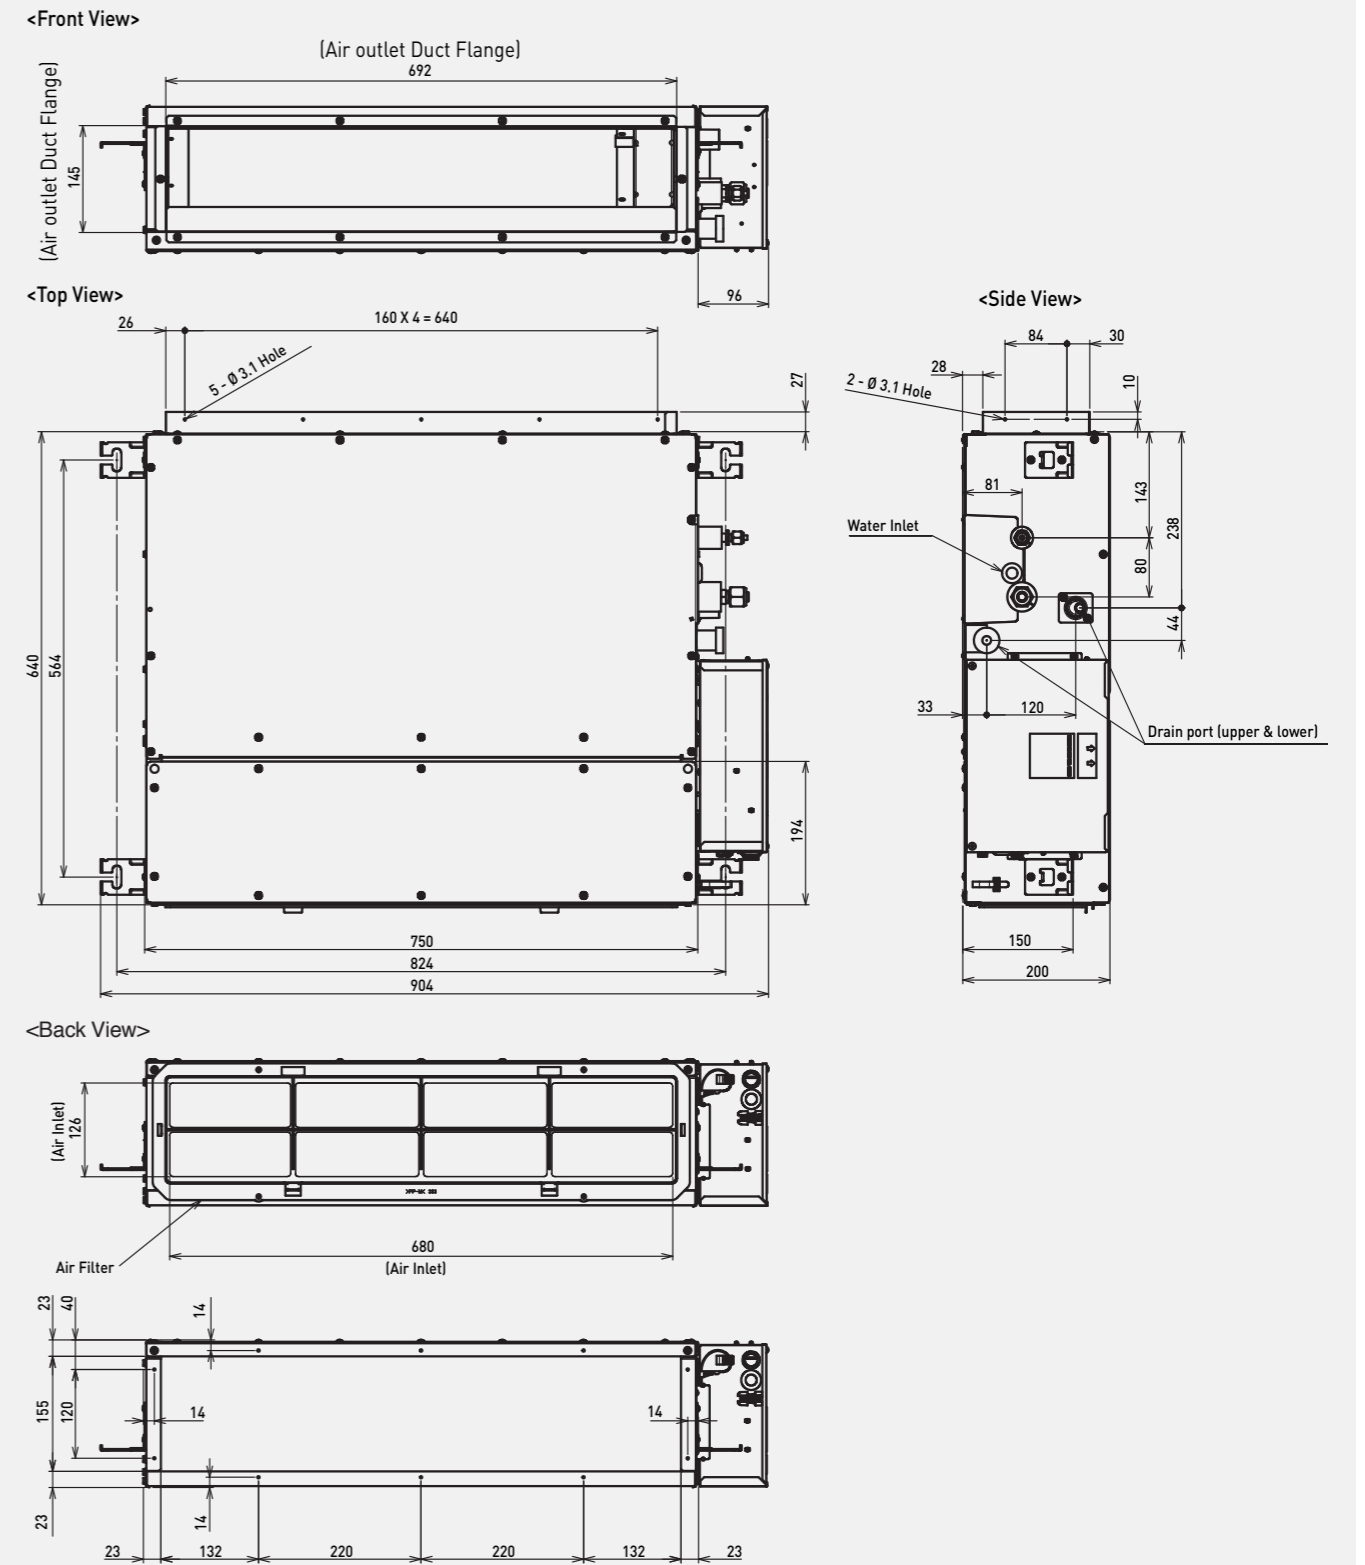


Unit: mm


Slim Ducted

CS-MS9SD3H/ CS-MS12SD3H/
CS-MS18SD3H/ CS-MS24SD3H


<Front View>

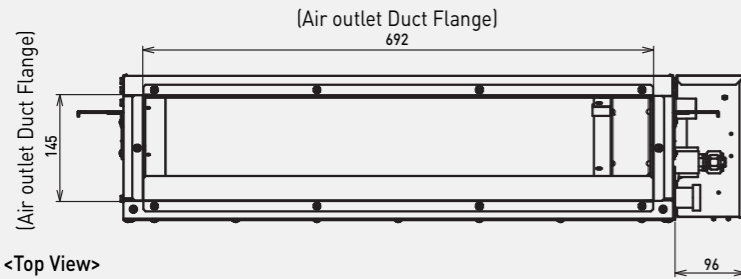



<Top View>

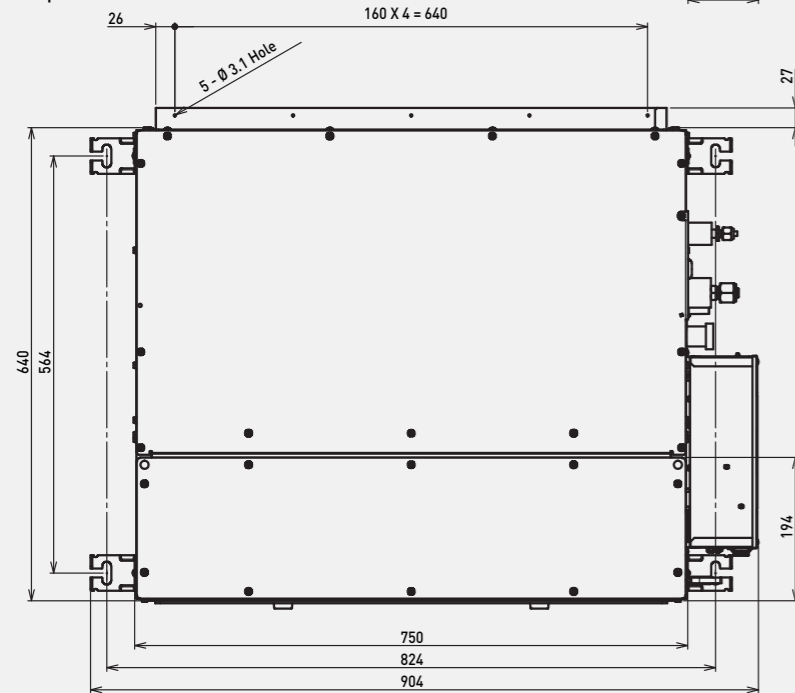

<Side View>

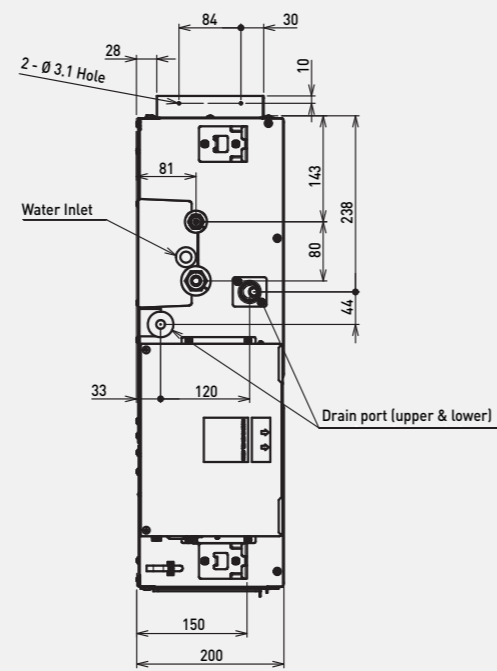





<Back View>

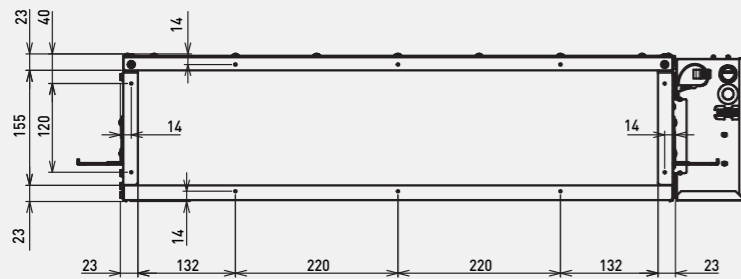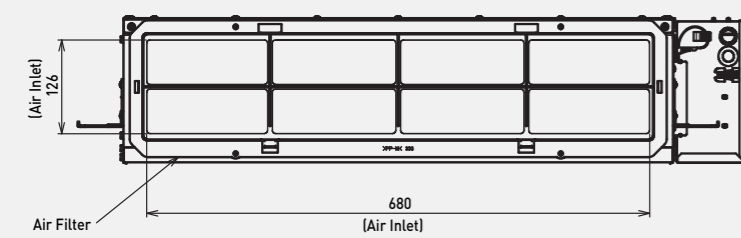

Unit: mm

4-Way Mini Cassette

CS-MZ25WB4H8A/ CS-MZ35WB4H8A/
CS-MZ50WB4H8A/ CS-MZ60WB4H8A

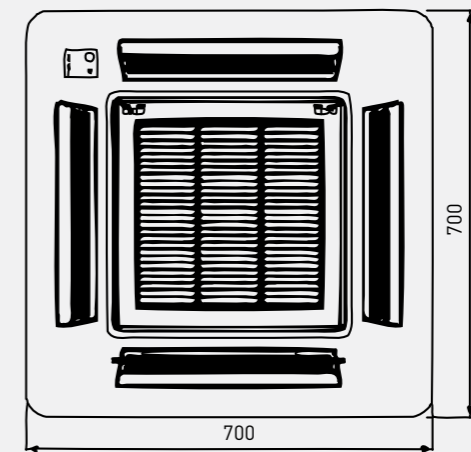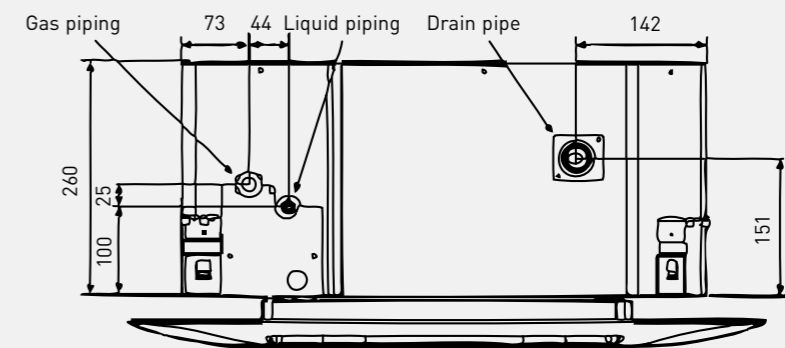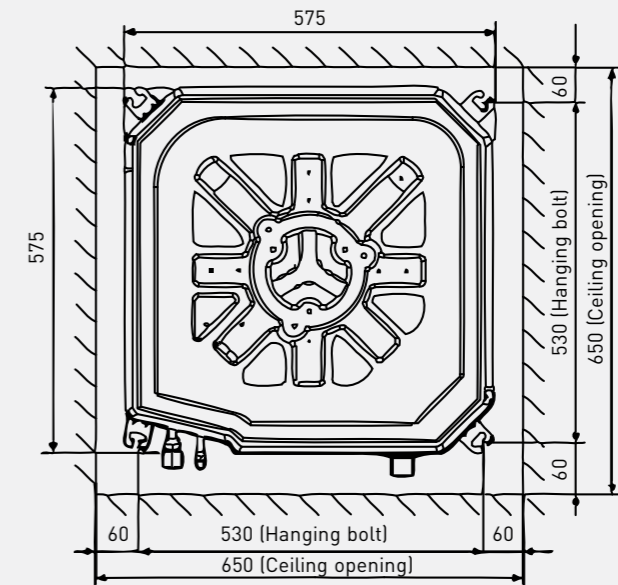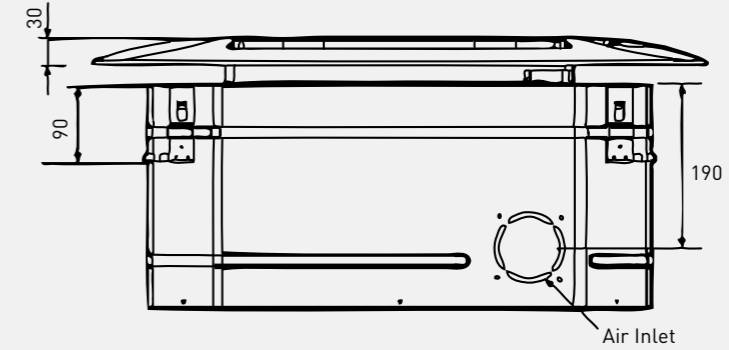

Unit: mm